Power plant connection

The power plants can be connected to the grid in two ways:

serial with grid power sensor	parallel with grid power sensor
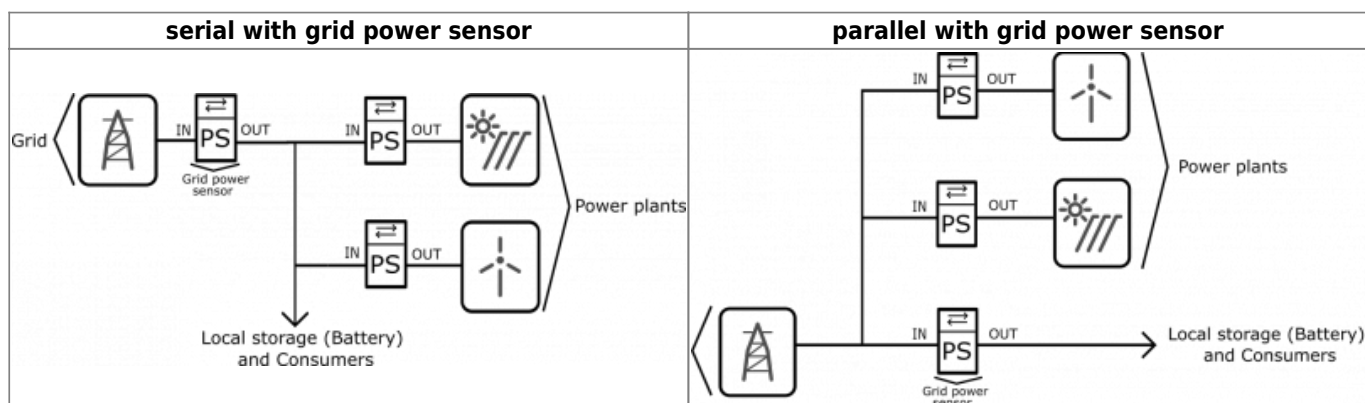
When configuring the power plant, select

- **in**: serial (**in**ternal) with grid power sensor
- **ex**: parallel (**ex**ternal) with grid power sensor

The power plants are configured as internal by default.

PV inverter

Obtaining relevant data from photovoltaic is possible by two ways:
1. adding power-sensor to measure produced electricity by PV (no connection to interver). How to add power sensor please see Power Sensor
2. connecting PV inverter by Modbus TCP to EVSE (only for SolarEdge inverters)

SolarEdge inverter over Modbus TCP

EVSE and PV inverter connection

To setup Modbus TCP on Inverter using SetApp:

- Select Site Communication menu
    - RS485-1 → Protocol → SunSpec (Non-SE Logger)
    - RS485-1 → Device ID, and enter the number 1.
    - Select Modbus TCP and set to Enable.
    - To modify the *TCP port, select Port, set the port number to 502.

*TCP port is 1502 by default.

From:
http://wiki.hiq-home.com/ -

Permanent link:
http://wiki.hiq-home.com/doku.php?id=en:robotina_charger:commissioning:pv_inverter&rev=1670588163

Last update: **2022/12/09 12:16**