


# HIQ UNIVERSE

HIQ Universe is a cloud service that enables:

- An overview of current power consumption and
- An overview of the history of electrical power and energy consumption and production.

Access point: <https://my.hiq-universe.com>

## HIQ Universe Log-in

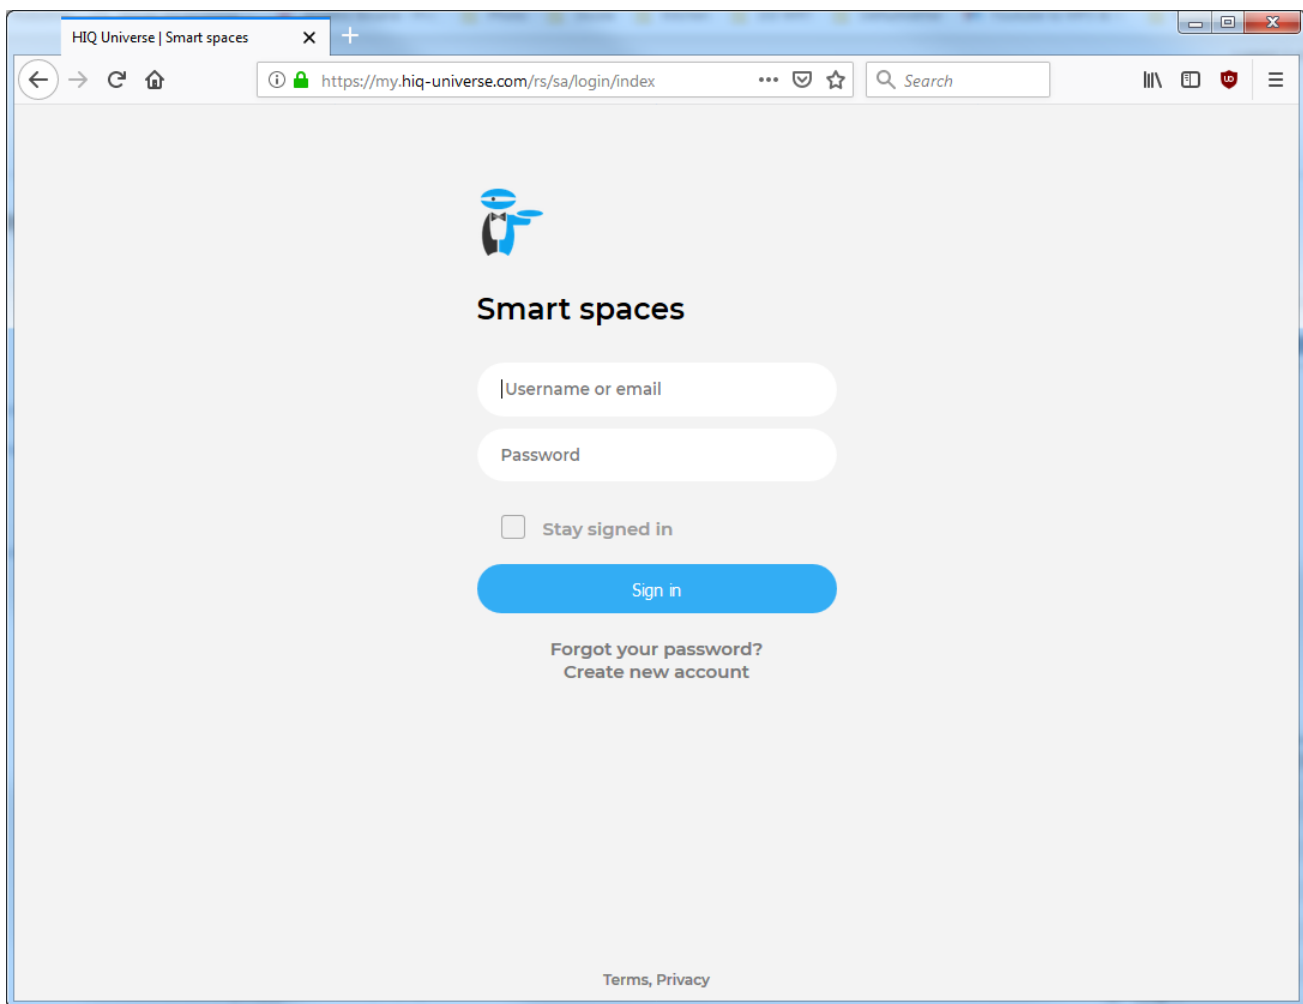


Log in with your username or email and password to see your [HIQ Universe subscription dashboard](#).

To reset forgotten password click on "[Forgot your password?](#)"

To create new account click on "[Create new account](#)".

## Create HIQ Universe account

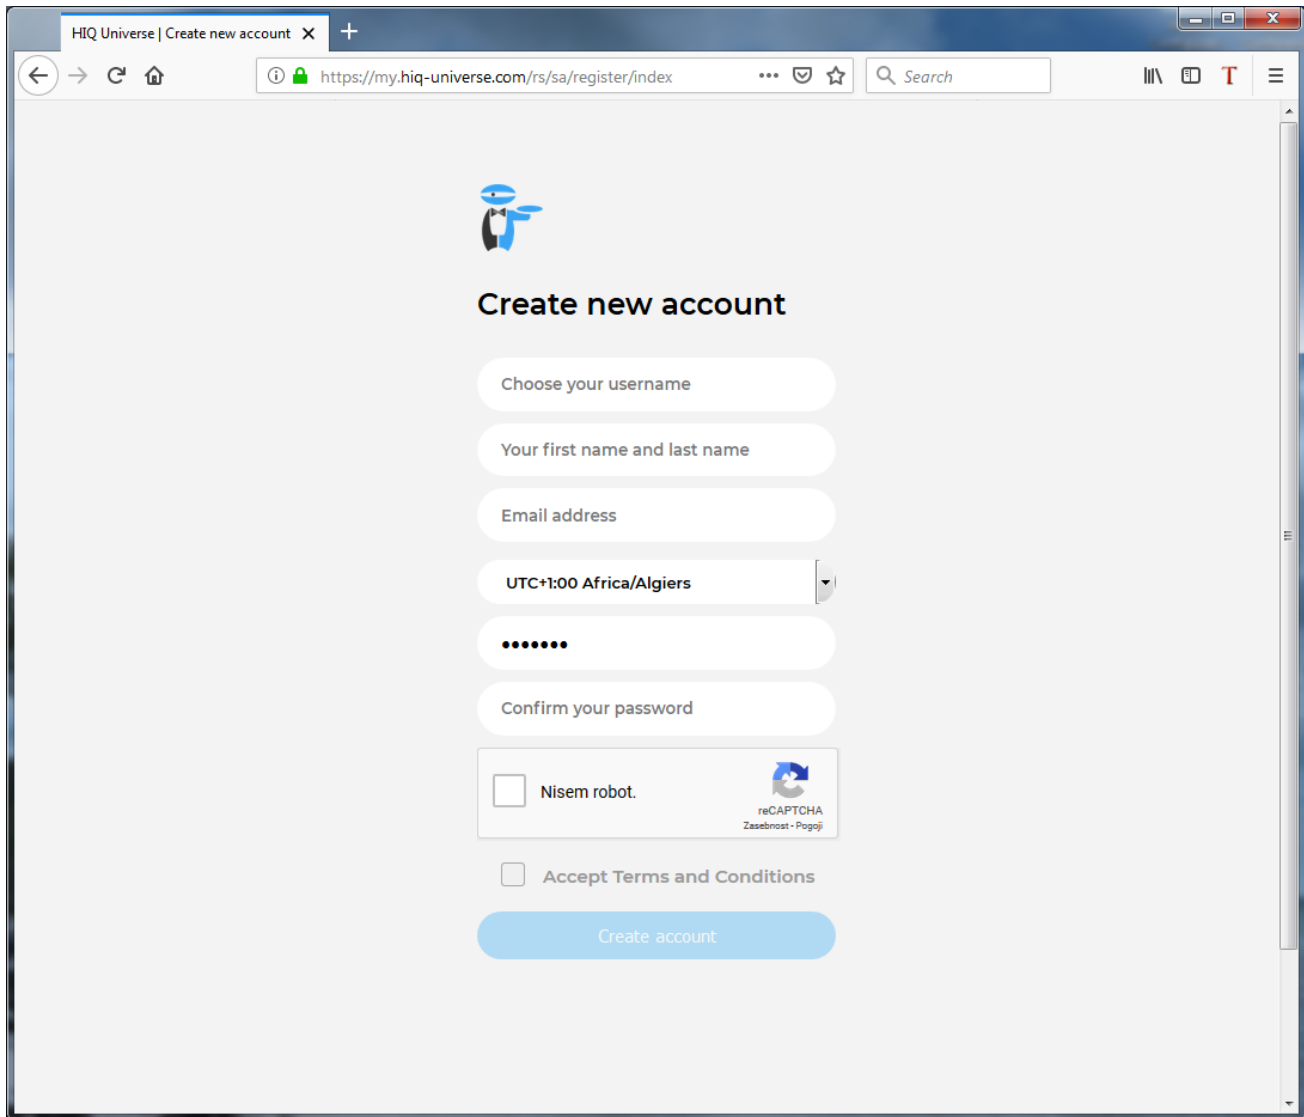

In the appropriate fields, enter:

- Username
- First and Last name
- E-mail address
- Timezone
- Password

Click on "I'm not a robot"


Accept Terms and Conditions.

Click on Create account.

A confirmation link will be sent to your email address.

Proceed to ["HIQ Universe Log-in"](#) screen.

## Reset forgotten password

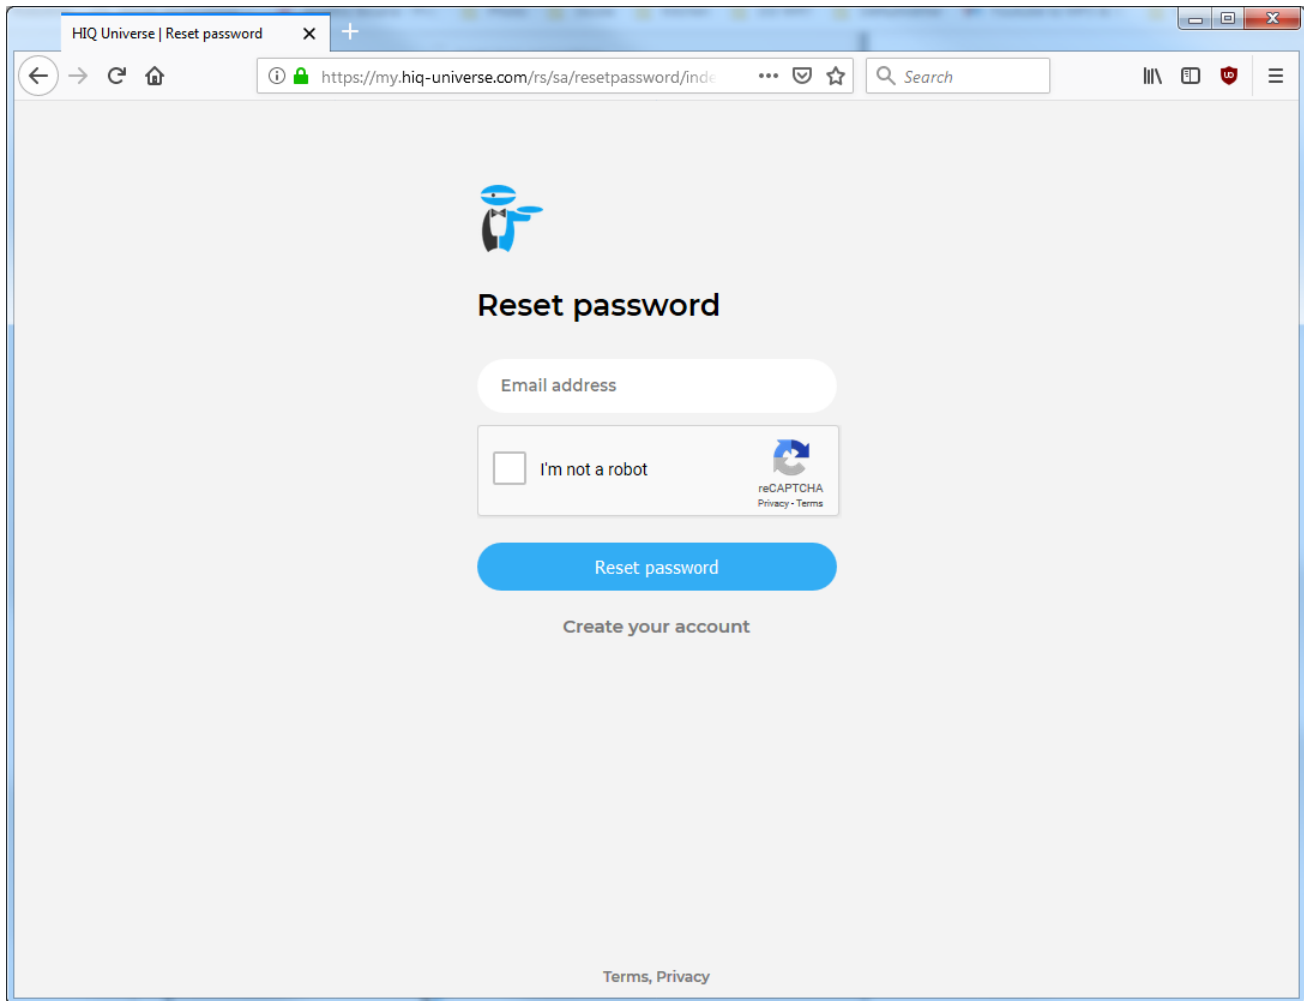

The screenshot shows a web browser window with the URL <https://my.hiq-universe.com/rs/sa/resetpassword/index>. The page features the HIQ Universe logo (a blue robot head) and the heading "Reset password". Below the heading is a text input field labeled "Email address". Underneath the input field is a reCAPTCHA widget with the text "I'm not a robot" and a checkbox. To the right of the checkbox is the reCAPTCHA logo and the text "reCAPTCHA Privacy - Terms". Below the reCAPTCHA widget is a prominent blue button labeled "Reset password". Underneath this button is a link labeled "Create your account". At the bottom of the page, there are links for "Terms, Privacy".

In the appropriate field, enter email address.

Click on "I'm not a robot"

Click on "Reset password".

You will receive email with password reset link.



Enter new password and click on "Save new password".


Proceed to ["HIQ Universe Log-in"](#) screen.

## Add HEMS controller



Enter HiQ universe activation code that you received from your installer.

## HIQ Universe subscription dashboard

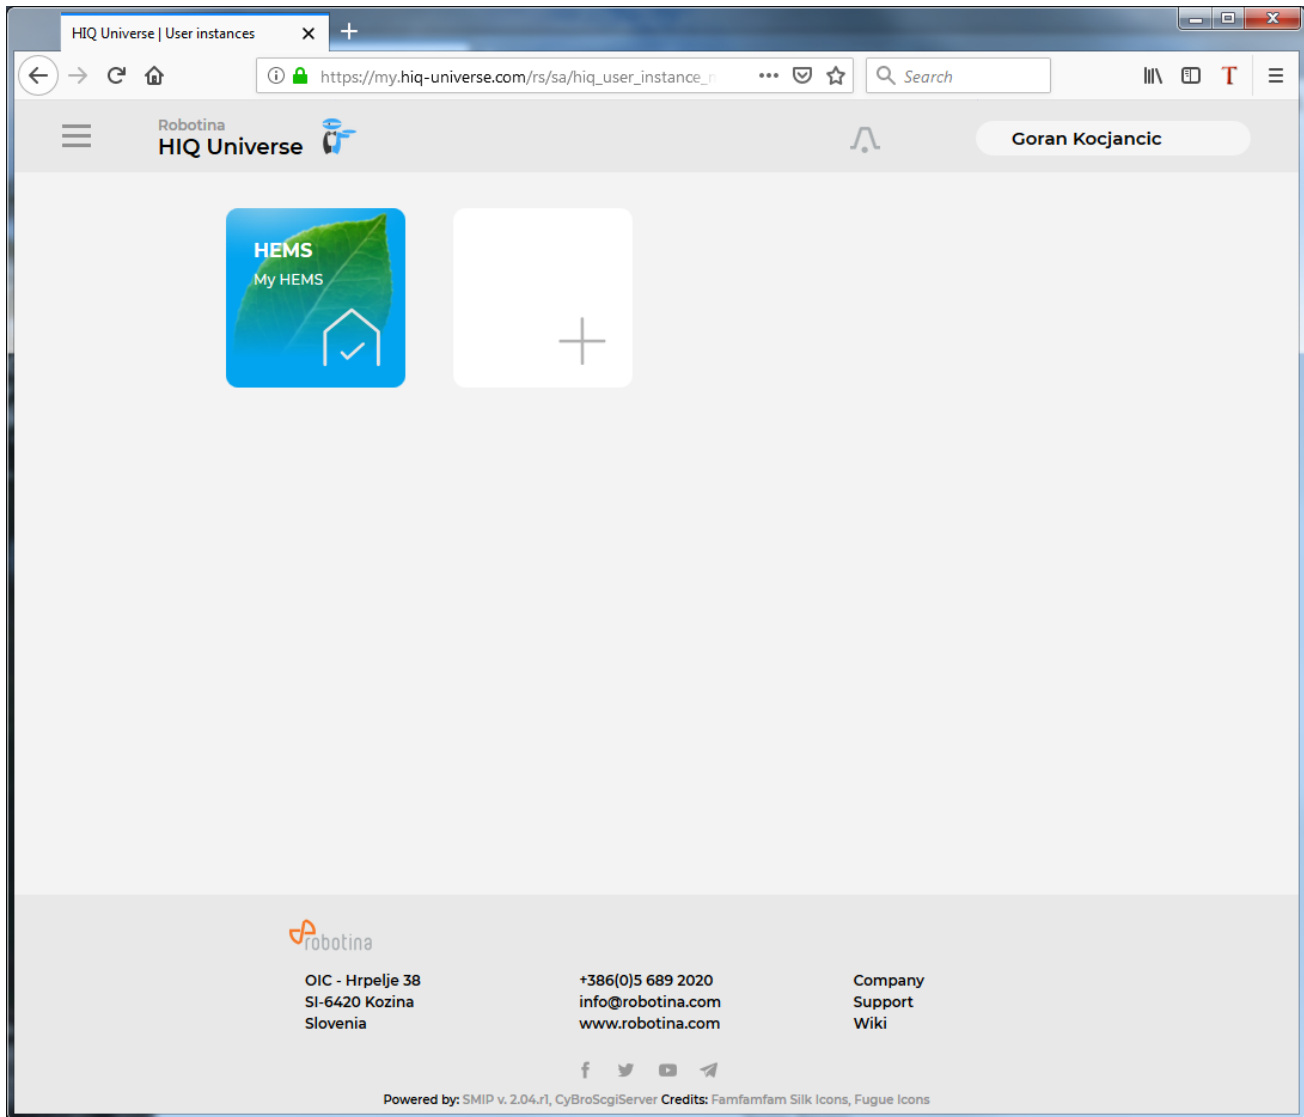

You will see tiles for all your subscribed HIQ Universe devices and services.

Go to [Main HEMS view](#) by clicking on HEMS tile or

add [new HEMS device](#) by clicking on blank tile with + sign.


["User profile set-up"](#) is invoked by clicking on user name on top right.

## Main HEMS view



Main HEMS page consists of 3 sections:

- "Title and view selection row" at the top
- "Power flow chart" on left side
- "Power and energy time-plot" on right

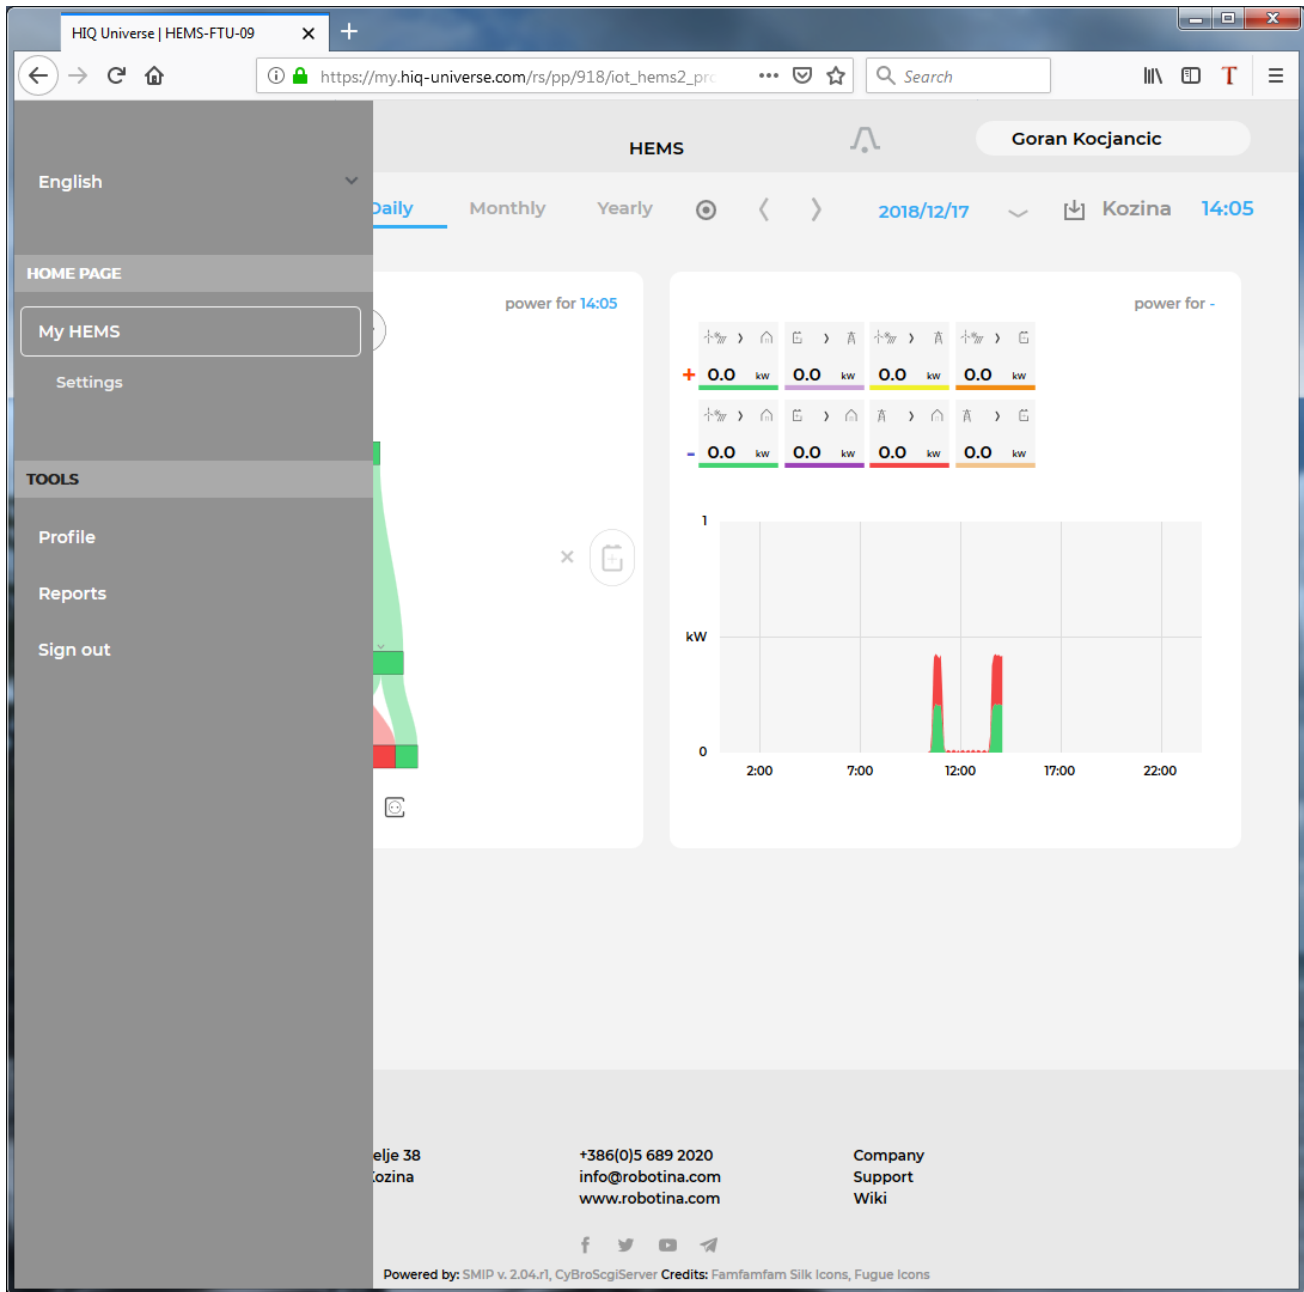

Side menu is activated by clicking menu icon (tree vertical lines at top-left). Menu items are dynamic created so can be different for each user. Typical menu items from top:

- Language selection
- Home page → section with all your subscribed HIQ Universe devices and services
  - MyHems → "Main HEMS view"
    - Settings → "HEMS settings"
- TOOLS → section with general site tools
  - Profile → "User profile set-up"
  - Sign out → Log off from HIQ Universe


### Title and view selection row



From the left:

- HEMS name
- Lighting icon → time-plot displays energy or power
- Money icon → time-plot displays currency
- Daily → time-plot displays power
- Monthly → time-plot displays energy per day
- Yearly → time-plot displays energy par month
- Target icon → time-plot go to now
- < → time-plot goes to previous term
- > → time-plot goes to next term
- Date → Select term for time-plot
- Download icon → Download “csv” data for displayed time-plot period
- Location of HEMS installation
- Time at HEMS installation site.

### **Power flow chart**

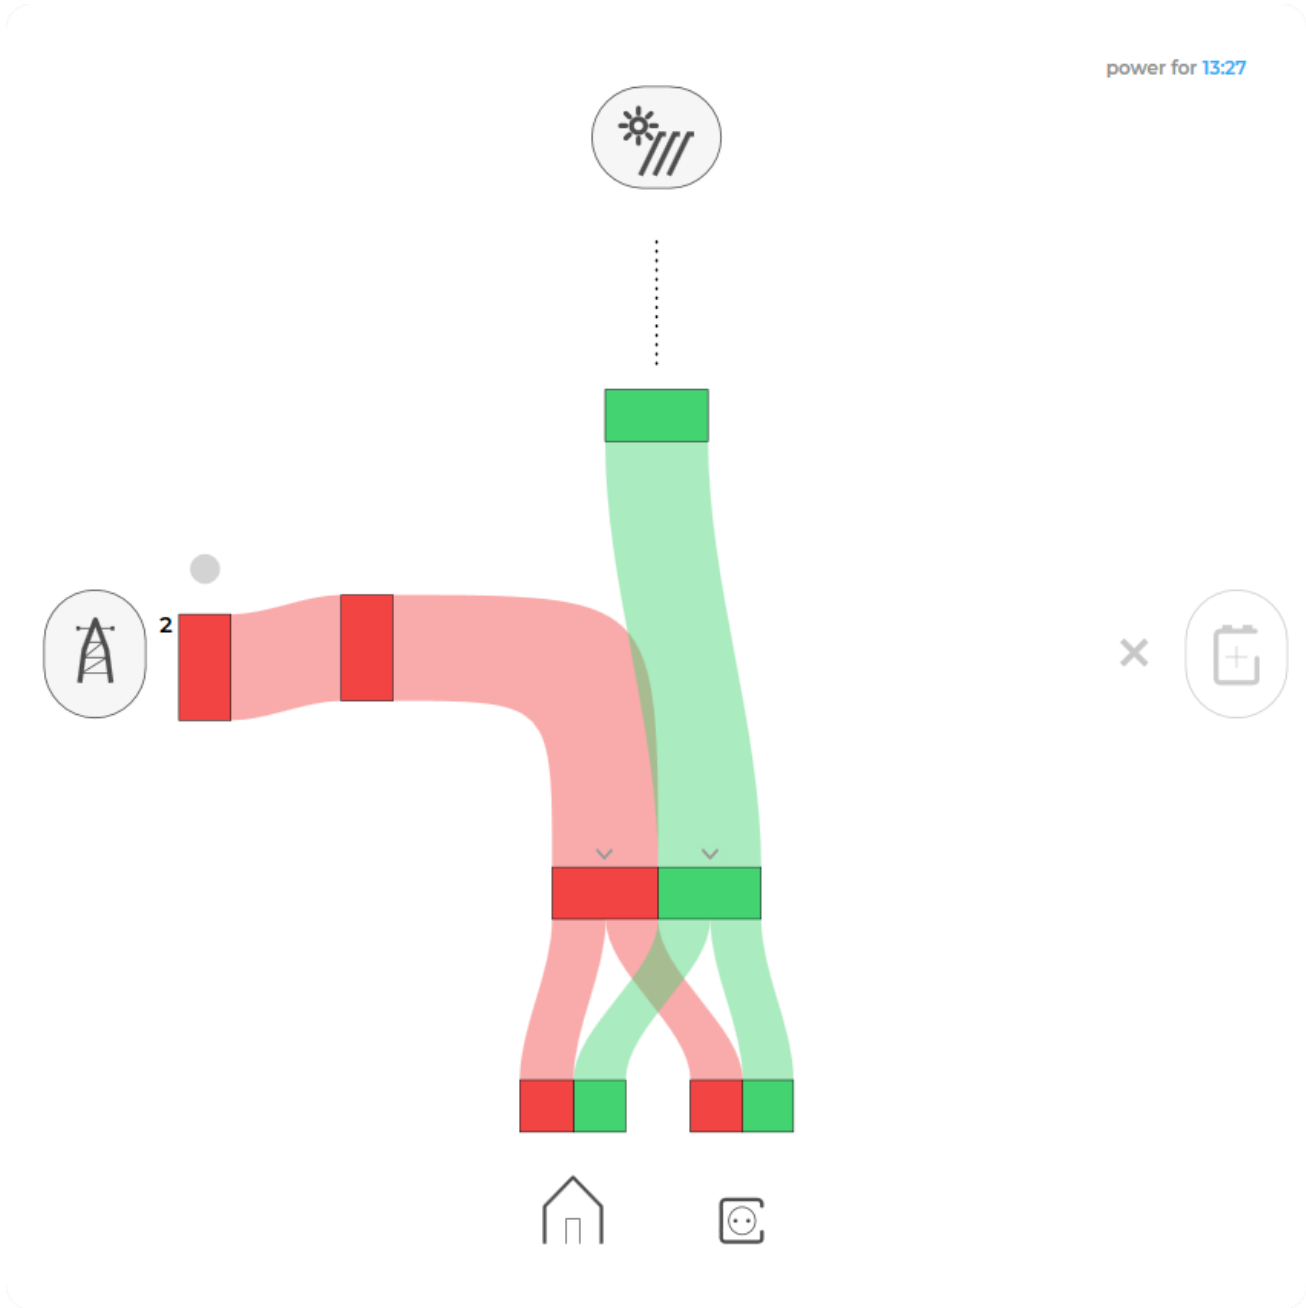


Displays actual power flow with:

- Power sources (Local PV, wind, co-generation plants) at top
- Grid (divided by tariffs) on left side
- Storage (battery) systems on right side and
- Consumers on bottom.

Unused items are soft greyed out with X. Items without actual power are displayed as dots.

### Power and energy time-plot

power for 10:55

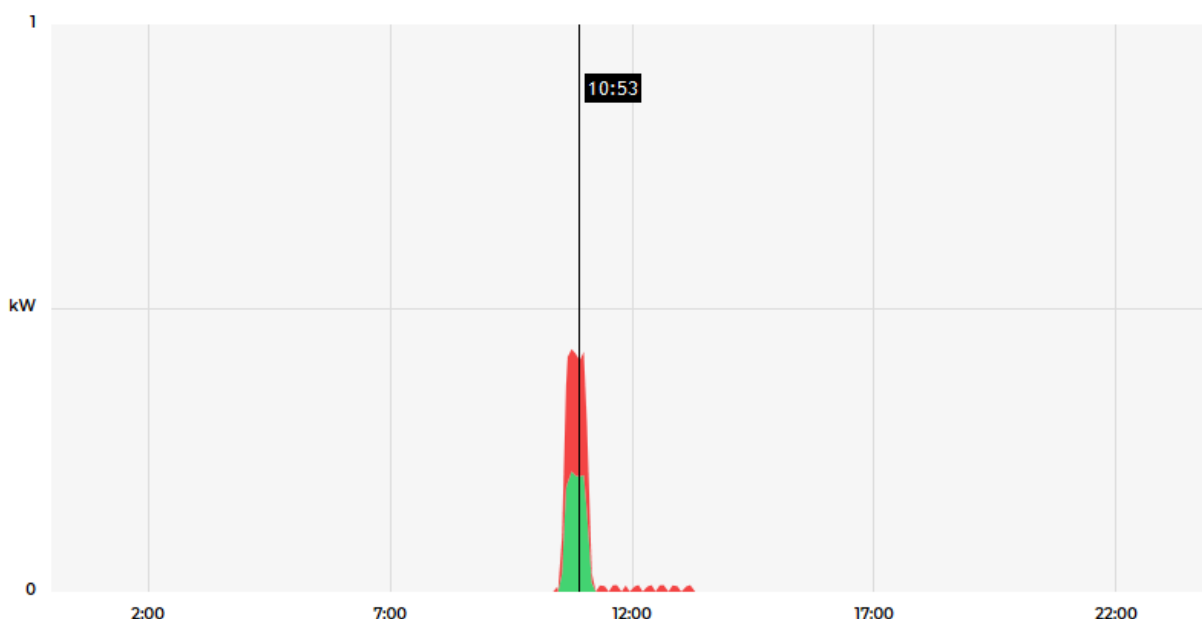

On bottom is time-plot for selected time period (in title row). By clicking on time plot a term for legend display is selected. Above there is power/energy legend.

### User profile set-up



Basic information section:

- Username
- Created date and IP
- Previous and last login date and IP
- Last password change date and IP

Profile section:

- Main realm display
- Full name, email address and timezone edit fields

Foreign realms - devices and services where you have access to but you are not owner.

Password: fields for password changing.

## HEMS settings

HIQ Universe | Settings

https://my.hiq-universe.com/rs/pp/918/iot\_hems2\_prc

Robotina  
HIQ Universe

Goran Kocjancic

### Settings

Device name: My HEMS

Location: Kozina

Location name: Kozina

Location latitude:

Location longitude:

### Energy price

Low tariff price (€/kWh): 0.100

High tariff price (€/kWh): 0.200

Feed-in tariff price (€/kWh): 0.100

### Timeplots range

Electricity

Max daily power (kW): 1

Max daily energy (kWh): 1

Max monthly energy (kWh): 20

Cost

Max daily value (€): 10

Max monthly value (€): 100

Save settings

### Share your device

Owner: goran.kocjancic@gmail.com

Guest account

Guest email address Remove quest

Sections:

- Settings:
  - Device name
  - Location name and coordinates
- Energy price: per tariff energy price
- Timeplots range: ranges for various timeplots
- Share your device: manage device sharing guest accounts

## My Things and Smart-grid settings

My Things GUI could be accessed within the [HiQ Universe](#) platform by clicking the MyThings item

within the main menu. Individual devices are presented as a group of cards, divided on four groups:

- Consumers
- Production
- Storage
- Sensors.

## Consumers

Within the group Consumers, the first card present a general consumption of the object - a background consumption. The following items present real controllable devices, such as DHW Heater, Heat pump, wireless socket, etc. An example of a device is shown in the following image.



The form of a card of each consumer is composed of the general part, history and settings part.

### General

- General part contain the **name** of a device, which can be changed by user.
- **icon** (button) enables toggling the device operation state (Switch on / Switch off).
- **state** label contain the information of device operation state (On / Off / Error).
- **power** label contain the information of device consumption power in watts.

### History

History part shows historical consumption of a device. The temporal range can be selected as daily, weekly, monthly or yearly. Daily and weekly range shows power consumption in watts, while monthly and yearly range shows energy consumption in kilowatt-hours.

The interface enables time-frame selection and time-frame alignment to current time.

### Settings

- **Manual override** present the time in minutes. If manual override is bigger than 0, the device will switch off automatically after specified number of minutes.

### Smart grid settings

- **Cloud optimization**
- **Smart grid status**
- **Enabled**
- **Max duration** in a day
- **Max request** in a day
- **Suspend time**

## History

## Settings

## Production

## Storage

## Sensors

From:

<http://wiki.hiq-home.com/> -

Permanent link:

[http://wiki.hiq-home.com/doku.php?id=en:hems\\_nedo\\_idrija:universe&rev=1601027868](http://wiki.hiq-home.com/doku.php?id=en:hems_nedo_idrija:universe&rev=1601027868)

Last update: **2020/09/25 09:57**

