


HEMS controller

Advanced HEMS controller

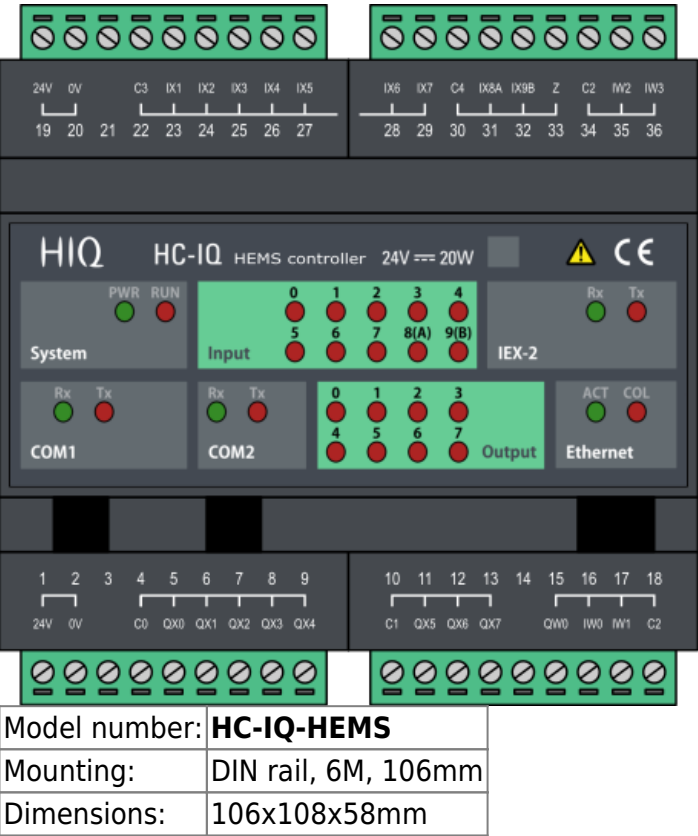

Features

- Sources and consumers measurements:
 - 1 × Grid
 - 3 × Local power plants (PV, wind, cogeneration,...)
 - 2 × Storage system (battery)
 - 8 × Consumers
- Load management
 - 8 × Consumers
 - Manual control
 - Manual override timer
 - Weekly timetable, 15 min resolution

Safety standards

EN 50081-1, EN 61000-6-2, EN 61131-1, EN 61131-2, EN 61000-3-2, EN 61000-3-3

Technical specification

Relay outputs:	3A/250V
Communication:	Ethernet, 2x RS232, IEX bus
Nominal power rating:	24V(19-28VDC)
Power consumption	typ. 4W (CPU, no external load)
	typ. 5W (CPU + 8 relays, no external load)
Power output (24V at IEX-2):	2A
Weight gross:	400g
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c

Terminals

Power supply 24 V DC	24V	1	Power supply input	Power supply output	19	24V	Push buttons power supply
	0V	2			20	0V	Push buttons common - to C3
		3		Digital inputs 0-7 common	21	C3	Push buttons common - to 0V
Power relay 0-4 power supply	C0	4	Relay outputs 0-4 common	Digital input 0	22	IX0	Managed load push-button 0
Managed load power relay 0	QX0	5	Relay output 0	Digital input 1	23	IX1	Managed load push-button 1
Managed load power relay 1	QX1	6	Relay output 1	Digital input 2	24	IX2	Managed load push-button 2
Managed load power relay 2	QX2	7	Relay output 2	Digital input 3	25	IX3	Managed load push-button 3
Managed load power relay 3	QX3	8	Relay output 3	Digital input 4	26	IX4	Managed load push-button 4
Managed load power relay 4	QX4	9	Relay output 4	Digital input 5	27	IX5	Managed load push-button 5
Power relay 5-7 power supply	C1	10	Relay outputs 5-7 common	Digital input 6	28	IX6	Managed load push-button 6
Managed load power relay 5	QX5	11	Relay output 5	Digital input 7	29	IX7	Managed load push-button 7
Managed load power relay 6	QX6	12	Relay output 6	Digital inputs 8-9 common	30	C4	
Managed load power relay 7	QX7	13	Relay output 7	Digital input 8 / HSC A	31	IX8A	
		14		Digital input 8 / HSC B	32	IX9B	
	QW0	15	Analog output 0	HSC Z	33	Z	
	IW0	16	Analog input 0	Analog inputs & outputs common	34	C2	
	IW1	17	Analog input 1	Analog input 2	35	IW2	
	C2	18	Analog inputs & outputs common	Analog input 3	36	IW3	

From:

<https://wiki.hiq-universe.com/> -

Permanent link:

https://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:hc-iq-hemsLast update: **2019/08/14 10:49**