

RDX Charger



| Description | Order Code |
|--|------------------|
| Robotina Dynamic Charger with type 2 cable and RFID card reader | RDX-RF |
| Robotina Dynamic Charger with type 2 cable, RFID card reader and residual current device | RDX-RF-R |
| Robotina Dynamic Charger with type 2 cable, RFID card reader and IOT Linker | RDX-RF-I |
| Robotina Dynamic Charger with type 2 cable, RFID card reader, residual current device and IOT linker | RDX-RF-RI |
| Robotina Dynamic Charger with type 2 cable and QR code reader | RDX-QR |
| Robotina Dynamic Charger with type 2 cable, QR code reader and residual current device | RDX-QR-R |
| Robotina Dynamic Charger with type 2 cable, QR code reader and IOT Linker | RDX-QR-I |
| Robotina Dynamic Charger with type 2 cable, QR code reader, residual current device and IOT linker | RDX-QR-RI |


Features

- **Up to 22kW of charging power**
- **Modern design with IP54 & IK10 standard**
- **Suitable for indoor and outdoor use**
- **Coloured LED light indicates charging status**
- **Easy operability with one button on housing for charging modes & stop**
- **Monitor & control charger operation via web-based cloud interface**
- **Compatible with 3rd party software**
- **Secure charger with remote locking option**
- **Save by charging (economy charging) during off-peak hours**
- **Charge with surplus energy (solar & wind energy)**
- **Priority charging at the highest possible power**
- **Dynamic load balancing keeps consumption power below max allowed (protect grid fuse/s)**
- **Manage charging of electric vehicles (EV fleet)**
- **Remote control of key consumers (heat pump, battery storage system,)**
- **6mA DC residual current, overvoltage and undervoltage protection**
- **RFID or QR access control to allow authorized usage only**
- **Long range wireless power sensors for installation without cabling**
- **Fully compliant with IEC 61851**

Technical specifications


| | |
|-------------------------|--|
| Nominal voltage | 1x230Vac 50/60Hz, 3x230/400Vac 50/60Hz |
| Maximum current | 1x32A, 3x32A |
| Maximum charging power | 22kW |
| Connector | Type2, 5m cable |
| Network connection | Ethernet 100M RJ45 |
| Ingress protection | IP54 |
| Impact resistance | IK10 |
| Operating temperature | -20°C to +45°C |
| Storage temperature | -40°C to + 70°C |
| Charging pilot negative | 1mA, 20ms reaction time |
| Residual direct current | 6mA, 200ms reaction time |
| Standards | IEC 61851 |

Dimensions

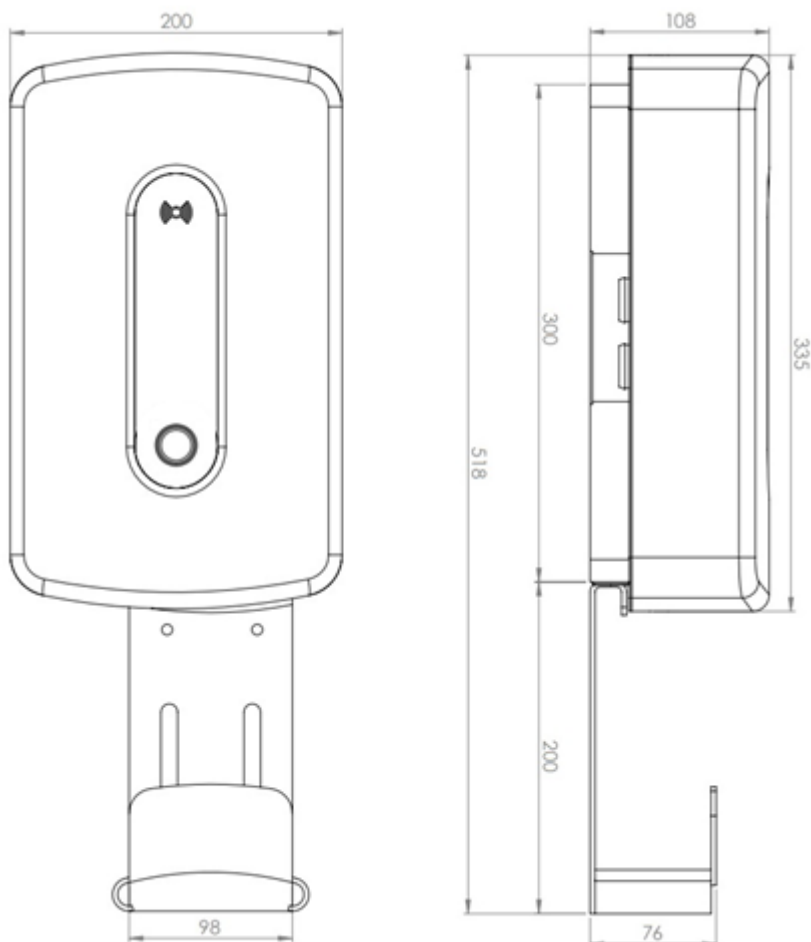

Cable holder mounting options

It can be installed directly on the RDX Charger

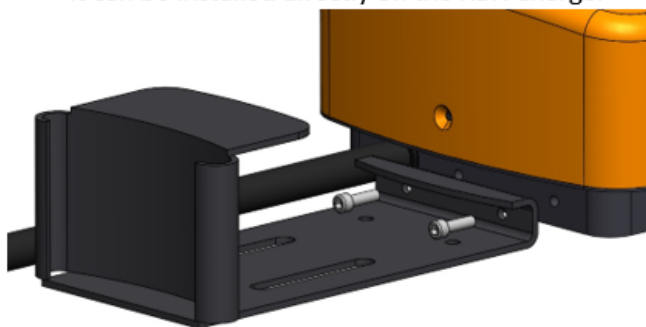

It can be installed independently on the wall



Accessories

| Description | Order Code |
|---|-----------------|
| Wireless external single-phase Power sensor kit | WPM1-E-D |
| Wireless external three-phase Power sensor kit | WPM3-E-D |
| External single-phase Power sensor | PM1-E-D |
| External three-phase Power sensor | PM3-E-D |
| Wireless Modbus bridge | WM-1 |
| Wireless relay, to control other loads in the building | WR-1 |
| Protective roof | RDX-PR |
| Freestanding set | RDX-FS |
| 4G LTE modem for IOT linker This option is only possible for RDX Charger models that already have an integrated IOT linker | IOT-L2-W |

From:
<http://wiki.hiq-home.com/> -

Permanent link:
http://wiki.hiq-home.com/doku.php?id=en:hiq_hw:rdx_charger&rev=1674467666

Last update: **2023/01/23 09:54**

