

# Commissioning

## 1. Inspect wiring

Check all wires and connections. Overvoltage on inputs or short circuit on outputs will destroy your HIQ device(s). Bad connections will cause unreliable operation and overheating.

## 2. HIQ power up


Power up the whole system.  
Light on/off and dimmer push buttons should already work.

## 3. HIQ Configuration and firmware update

Install [HIQ Configurator](#).

### Autodetect

To switch from controller to controller use Autodetect function.

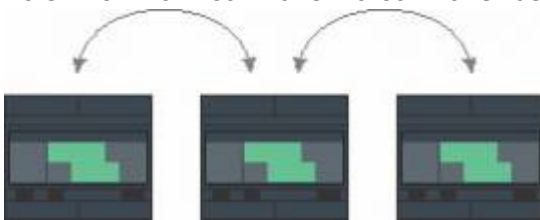


On "System" page press "Autodetect" button to detect and then select your Home controller (HC). If there are many controls you have to choose appropriate NAD number (written on the top of HC). Repeat next steps for all controllers.



According to the different configurations of hardware and software on your computer it can happen that Autodetect fails. In this case you need to make [manual HC-IQ detect](#).


## Autoaddress

To get all modules in order use Autoaddress function.

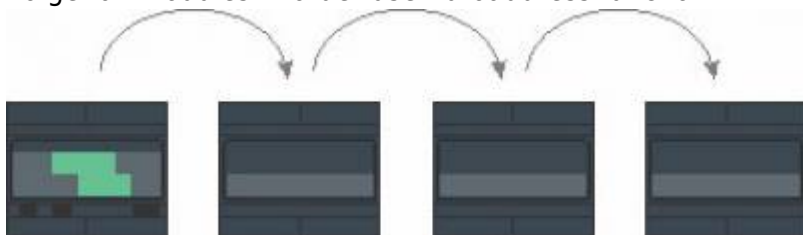

Devices inside switchboard are addressed sequentially, from left to right. Devices outside of switchboard (field modules) are addressed in order of ascending serial numbers - lowest serial number gets the first address, second lowest the second and so on.

Note that **thermostat** with lowest serial number controls **FC controller** with lowest serial number and so on.

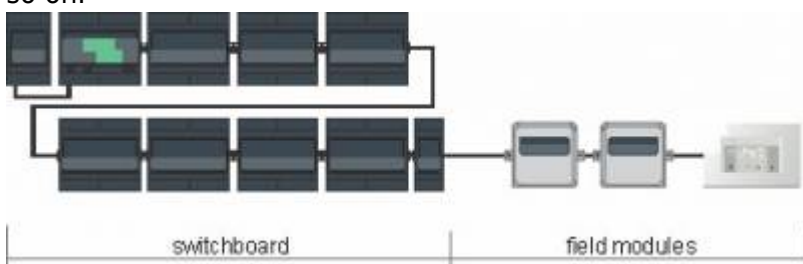

Manual address:

If we have system with non-standard layout, then Autoaddress will not work (correctly) and we have to make **manual address**.

## FW update

When (auto)address is finished we check if all the modules have the latest firmware installed. We check installed firmware versions on the "System" page.

DC device type is circled in red, DC version in blue and HC version in green:



We compare our firmware versions with the table below:

| Name                   | Code | Last firmware version | Compatible hardware |
|------------------------|------|-----------------------|---------------------|
| <b>Home Controller</b> |      |                       |                     |

|                               |          |            |                  |
|-------------------------------|----------|------------|------------------|
| Home controller               | HC-IQ    | v1.2.15    | CyBro-2-24       |
|                               | Cybro-3  | v6.1.0     | CyBro-3          |
|                               | MC-xx-xx |            | MC               |
| <b>Device Controllers</b>     |          |            |                  |
| Light controller              | LC-10-IQ | v3206      | Bio-20R v1.1     |
| LED stripe dimmer             | LD-V4-IQ | v3303      | v1.0             |
|                               |          | v3306      | v1.1, v1.2       |
| Light dimmers driver          | LD-P4-IQ | v3022      | v1.0, v1.1       |
| DALI dimmer                   | LD-D8-IQ | v3215      | LC-DC v1.1       |
| Blinds controller             | BC-5-IQ  | v3209      | Bio-20R v1.1     |
| Scene touch panel             | SC-4T-IQ | v3001      | SC-4T v1.0, v1.1 |
| Scene controller              | SC-4S-IQ |            | SW-W3 v1.0       |
| Thermostat                    | TH-1M-IQ | v3214-hw12 | OP-6 v1.1, v1.2  |
|                               |          | v3214-hw14 | OP-6 v1.4        |
|                               | TH-1T-IQ | v3214-hw14 | OP-6T v1.1       |
|                               | TH-2-IQ  | v3010      | TS-H v3.0, v3.1  |
| Thermostat & scene controller | TH-3-IQ  | v3006      | OP-5 v1.5        |
| HVAC controller               | FC-1-IQ  | v3205-hw23 | FC v2.3          |
|                               |          | v3205-hw24 | FC v2.4          |
| ALL                           |          | ALL        |                  |

If needed we make [firmware update](#) and run "Autoaddress" again.

### HIQ-DC configuration

For HIQ-DC configuration we follow all steps in [HIQ Configurator](#).

## 4. Connect to the internet

Connect to [HIQ Universe](#).

## 5. Save configuration

We save configuration and restore it later if there are any unwanted changes.



## 6. HIQ Commander setup

Proceed with [HIQ Commander setup](#).

From: <https://wiki.hiq-home.com/> -

Permanent link: [https://wiki.hiq-home.com/doku.php?id=en:hiq\\_home:methods:commissioning&rev=1598259598](https://wiki.hiq-home.com/doku.php?id=en:hiq_home:methods:commissioning&rev=1598259598)

Last update: 2020/08/24 08:59

