
Micro card reader

Wiegand RFID receiver

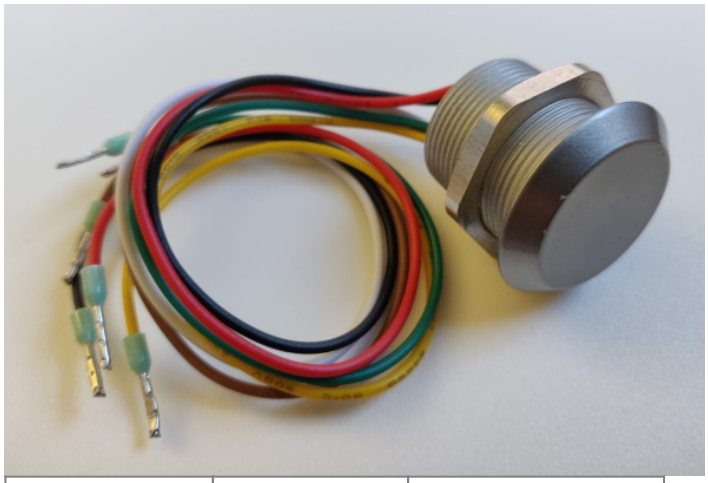

Model number:	**CR-MR**	EM, 125 kHz
	CR-MM	Mifare
Mounting:	Field, fi 20 mm	
Dimensions:	fi 26 x 25 mm	
Connection:	Wiegand to Card reader interface	

Technical specifications

Power supply:	12 VDC
Protection:	IP66
Color:	Silver
Reading Distance:	3 cm
Card interface:	EM 125 kHz, Mifare
Output Interface:	Wiegand 26 / 34

Wiring

CR-MR	**CR-W2-IQ**		**MC-230-3W**		**Notes**
	1st	**2nd**	**1st**	**2nd**	
RD	+12V		+12V		Power supply
BK	GND		GND		
GN	D0-0+1		D0		Wiegand data
WH	D1-0	D1-1	D1-0	D1-1	
YE	GN-0	GN-1	GN-0	GN-1	LED indicator
BN	- / GND*		- / GND*		Wiegand 26 / 34

* Not connected ⇒ Wiegand 26, GND ⇒ Wiegand 34

From:
https://wiki.hiq-home.com/ -

Permanent link:
https://wiki.hiq-home.com/doku.php?id=en:hiq_hw:cr&rev=1586249224

Last update: **2020/04/07 08:47**