
Scene controller

4 buttons input

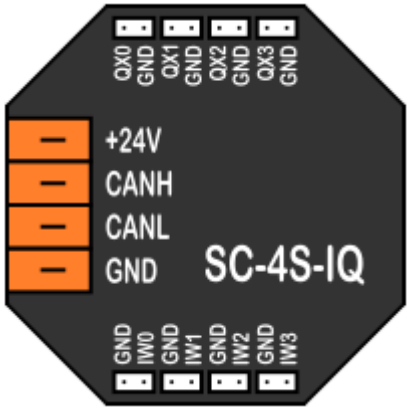

Model number:	**SW-W3-IQ**
Mounting:	in-wall, in junction box behind scene buttons
Dimensions:	50×50×15mm

Applications

- Push buttons input
- Individual light / dimmer button
- Blinds up/down button

Features

- quick set any lights and/or blinds to predefined value
- configurable button action:
  - on/off
  - dimmer push button (on/off and 0..100%)
  - blinds up/down
  - scene

General description

SW-W3-IQ is in wall compact push button input module. Any kind of push-button design can be used.

Technical specification

LED outputs:	10 mA, PWM dimmable

Inputs:	internal pull-up 12V, 2 mA
Power supply:	24V/35mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c

Terminals

IEX2 Bus	**+24V**	IEX2 Bus
	CANH	
	CANL	
	GND	
1st push-button	**GND**	Digital inputs common
	IW0	Digital input 0
2nd push-button	**GND**	Digital inputs common
	IW1	Digital input 1
3th push-button	**GND**	Digital inputs common
	IW2	Digital input 2
4th push-button	**GND**	Digital inputs common
	IW3	Digital input 3
1st LED indicator	**QX0**	LED PWM output 0
	GND	LED PWM common
2nd LED indicator	**QX1**	LED PWM output 1
	GND	LED PWM common
3th LED indicator	**QX2**	LED PWM output 2
	GND	LED PWM common
4th LED indicator	**QX3**	LED PWM output 3
	GND	LED PWM common

From:
https://wiki.hiq-home.com/ -

Permanent link:
https://wiki.hiq-home.com/doku.php?id=en:ms_main:sw-w3&rev=1587360203

Last update: **2020/04/20 05:23**