

Electric strike

Electromechanical strike lock

Model number: **EL-ST** Electric strike




General description

The most compact electric strike without sacrificing any of the quality or safety offered by our other products. EL-ST is the perfect match for narrow aluminium, PVC or timber profiles.



Technical specifications

| | |
|---|--------------------------------------|
| Power supply: | 9-24V AC/DC, 12V DC |
| Continuos duty: | <1 min/ED 100% |
| Rated resistance: | 43 Ohm |
| Current consumption AC: | 0.15A...9V, 0.2A...12V, 0.39A...24V |
| Current consumption DC(stabilized): | 0.21A...9V, 0.28A...12V, 0.56A...24V |
| Maximum side-load on AC: | 24V - 200N |
| Maximum side-load on DC (stabilized): | 12V - 50N |
| Break-in resistance: | 4.800N |
| Dynamic strength: | 4.400N |
| Endurance rating (cycles no side-load): | 200.000 |
| Complies with the directive: | 2014/30/UE; 2011/65/UE |


Dimensions

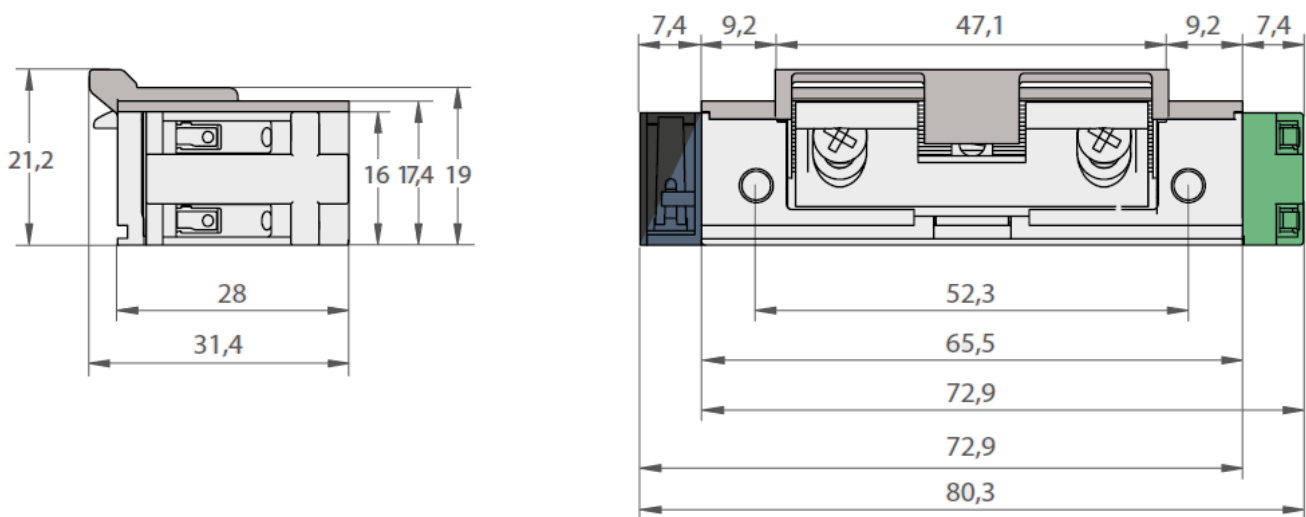

Terminals

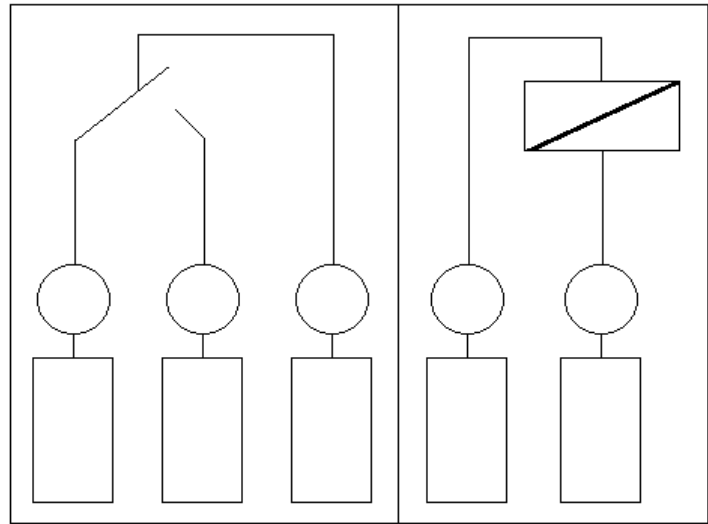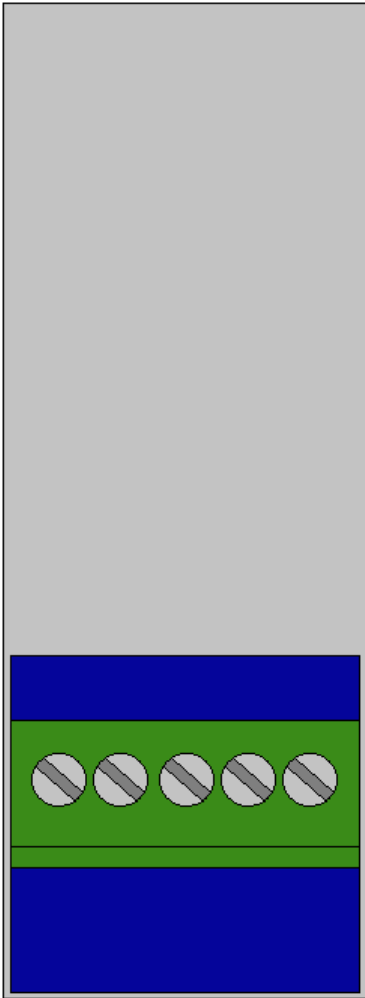

C NO NC GND 24V

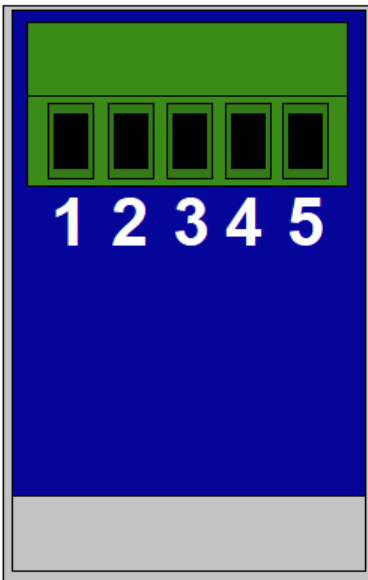

- 1 - 24V**
- 2 - GND**
- 3 - NC**
- 4 - NO**
- 5 - C**

From:

<http://wiki.hiq-home.com/> -

Permanent link:

http://wiki.hiq-home.com/doku.php?id=en:hiq_hw:el_strike&rev=1623670000



Last update: **2021/06/14 11:26**