


HIQ designing

Presented electric wiring plans were made with the help of [Elwin](#) software which is made by [3xM Automation company](#). New plans can be made with modification of included [Elwin project](#) or with modification of [DXF plans](#) with any DXF capable program. With the Elwin project, all HIQ symbols are included. The whole design plan can be also downloaded as a [PDF file](#).

Page 1- Power distribution-RCD switch and power meter


Single phase power input, connection of RCD switch (Residual Current Device) and [power meter](#). Input can be single or three phase.

The [power meter](#) on the wiring plan is connected to measure the whole electricity consumption, but can be connected to any device (or group of devices). Only single phase electricity measurement is available.

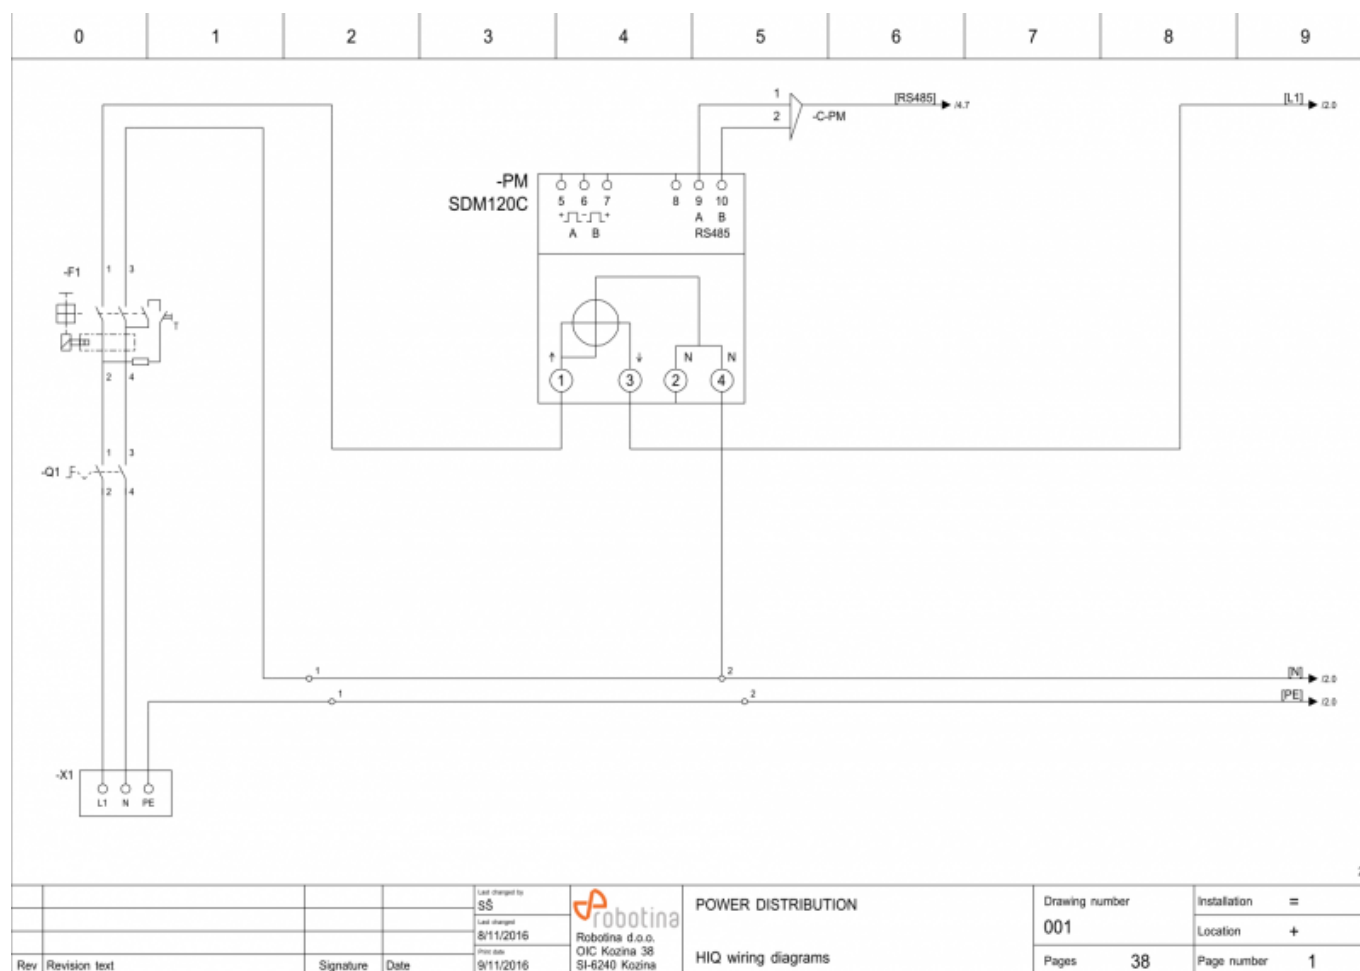


Page 2-3 - Power distribution - Fuses

Suggested fuse plan.

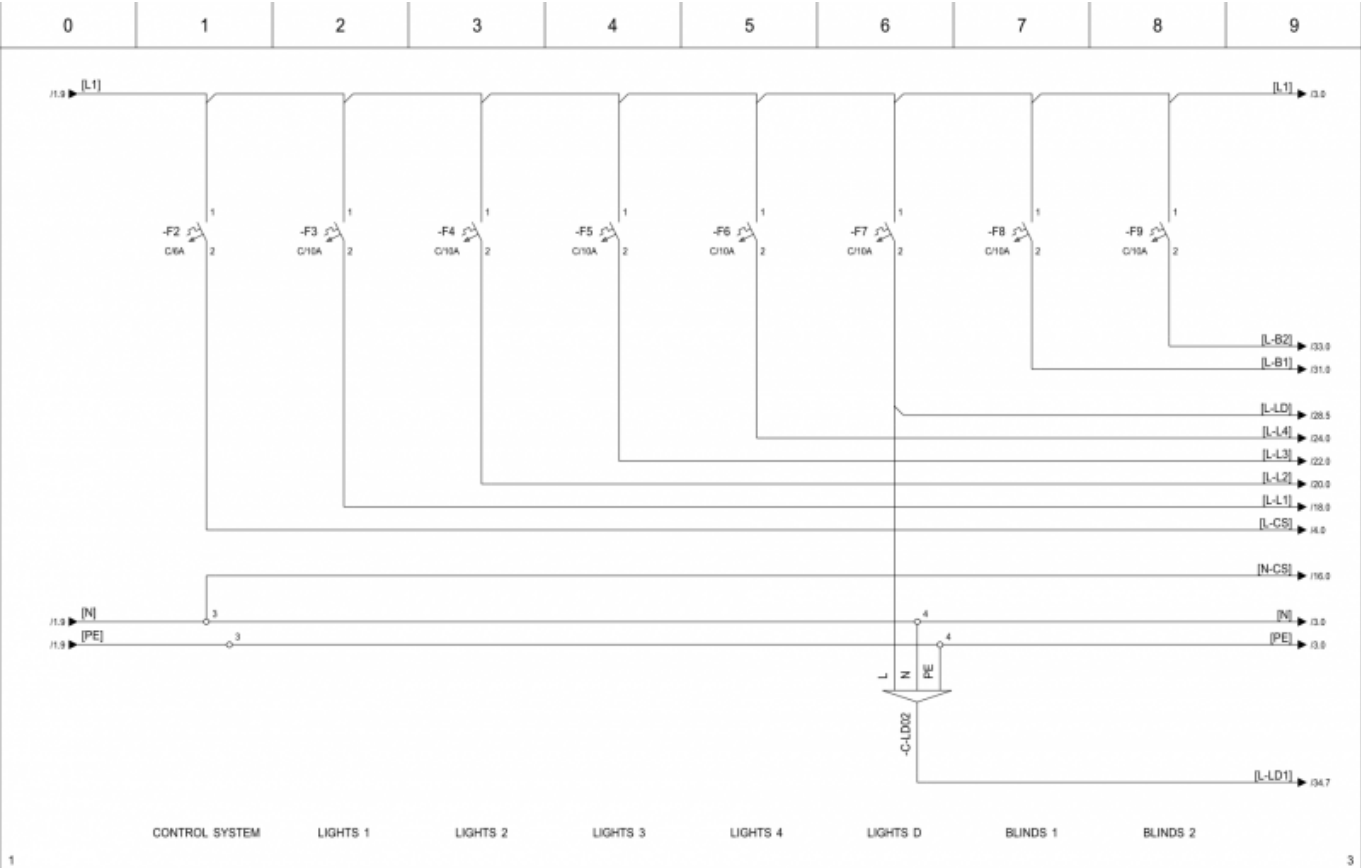

1		3	
Rev		Revision text	Signature
7/11/2016		7/11/2016	9/11/2016
Last changed by		SS	SS
Last changed		7/11/2016	7/11/2016
Print date		9/11/2016	9/11/2016
Robotina d.o.o.		OIC Kozina 38	SI-6240 Kozina
POWER DISTRIBUTION		HIQ wiring diagrams	
Drawing number		001	Installation =
Pages		38	Location +
			Page number 2

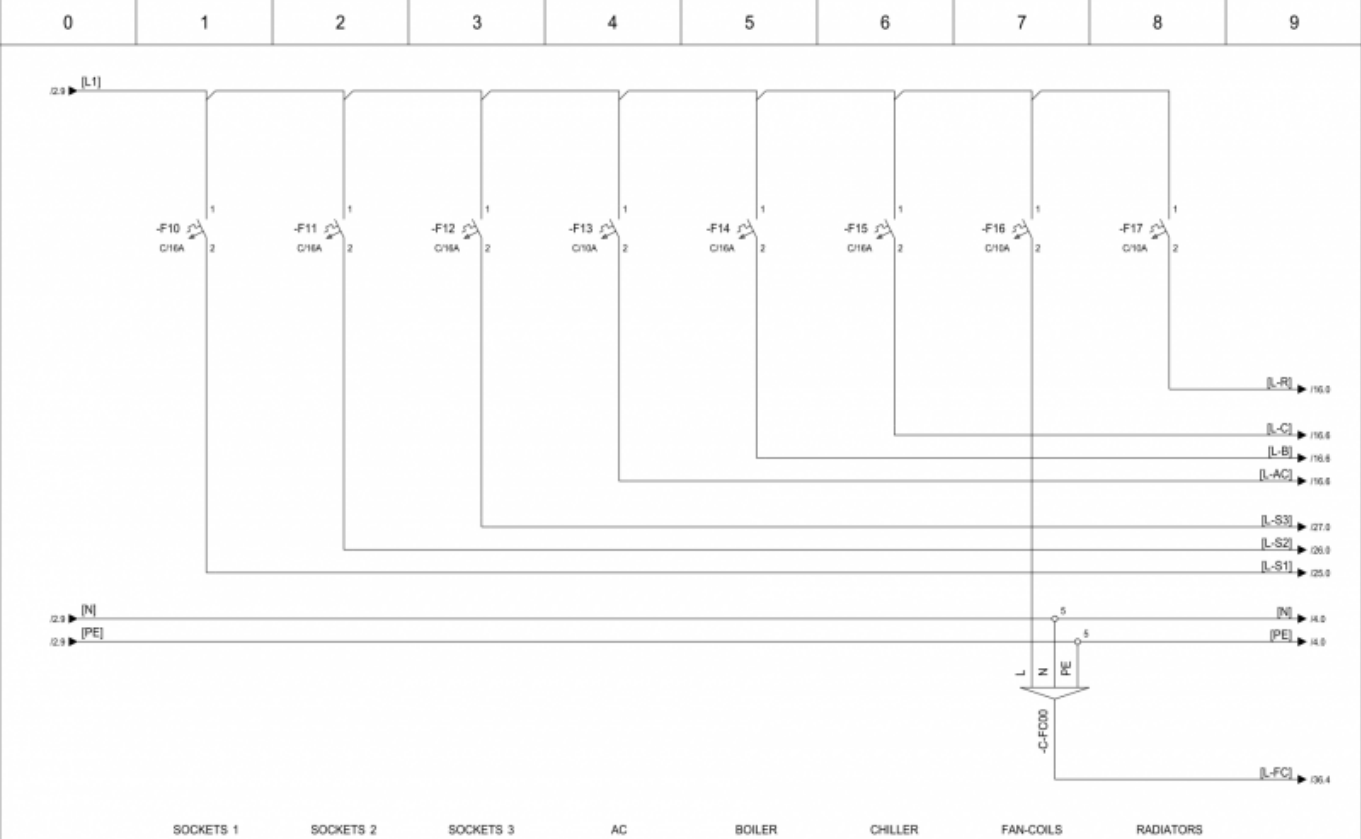

2		4	
Rev		Revision text	Signature
2/11/2016		2/11/2016	9/11/2016
Last changed by		GK	GK
Last changed		2/11/2016	2/11/2016
Print date		9/11/2016	9/11/2016
Robotina d.o.o.		OIC Kozina 38	SI-6240 Kozina
POWER DISTRIBUTION		HIQ wiring diagrams	
Drawing number		001	Installation =
Pages		38	Location +
			Page number 3


Page 4 - Control System-Power supply, HC, CAD-232

24V power supply (PS) for control system, Home controller and CAD-232-A2-IQ.

24V power supply can be optionally used for LED lighting (up to 2.5A with serial power supply, larger power supply can be used).


Home controller (HC) is the heart of the system. It is connected to the network (ETH) and has optional inputs (connections are on page 15) and outputs (connections are on page 16).


CAD-232-A2-IQ expander is used as communication interface between home controller and power meter (If power meter is not used then the expander is not necessary). It is connected to a home controller through IEX bus, to COM2 on home controller input and to power meter (RS485 communication).

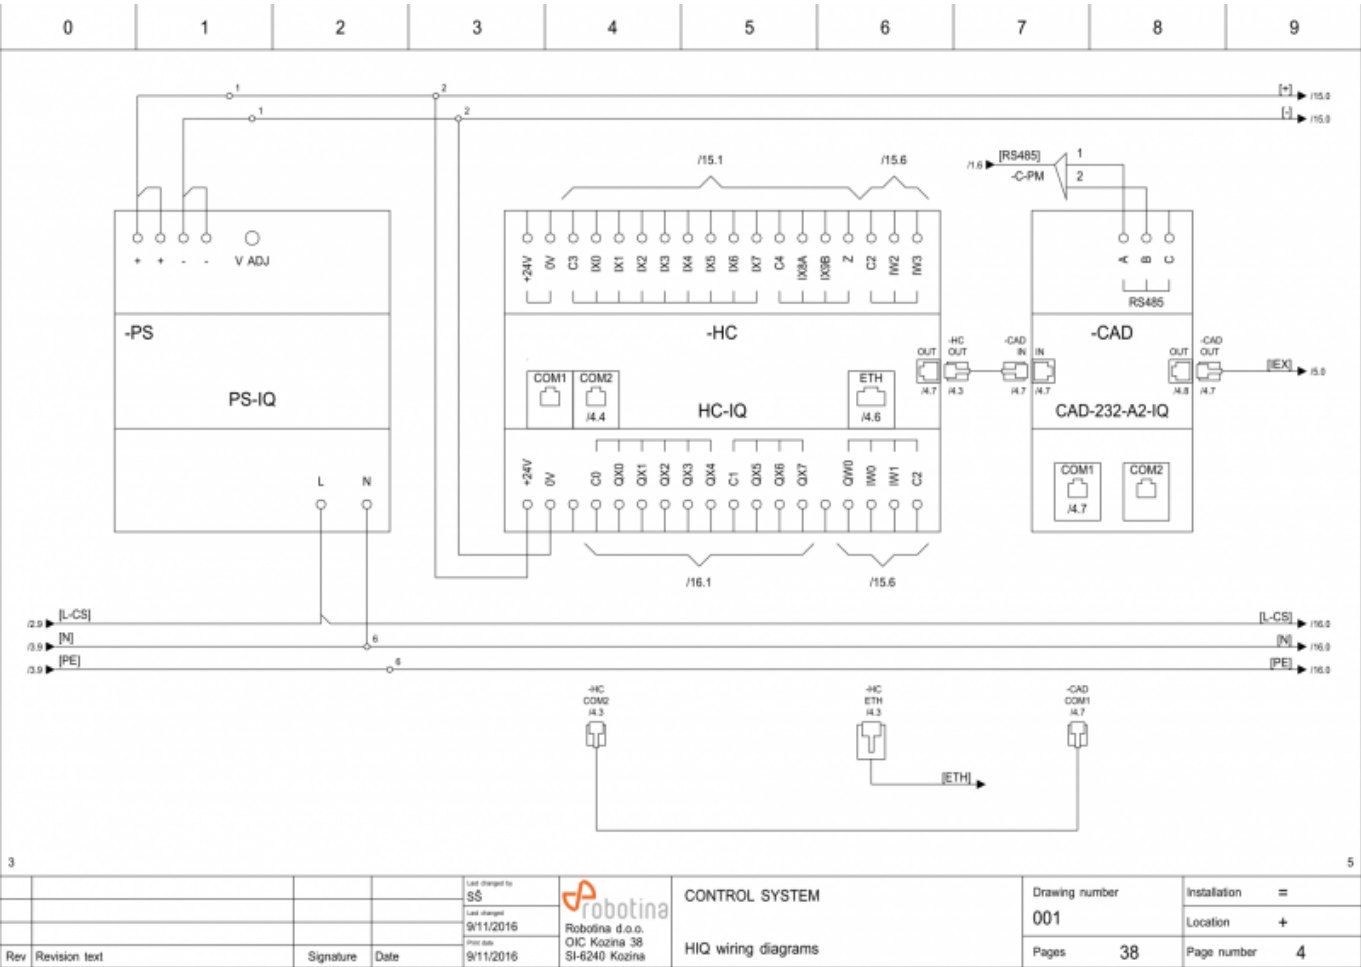


Page 5-6 - CS-Light controller 00 and 01

Light controllers (LC) are connected to IEX bus, we can connect up to up 4 LC to 1 home controller. On the top side are inputs and on the bottom side are outputs (connections are on page 17-24).

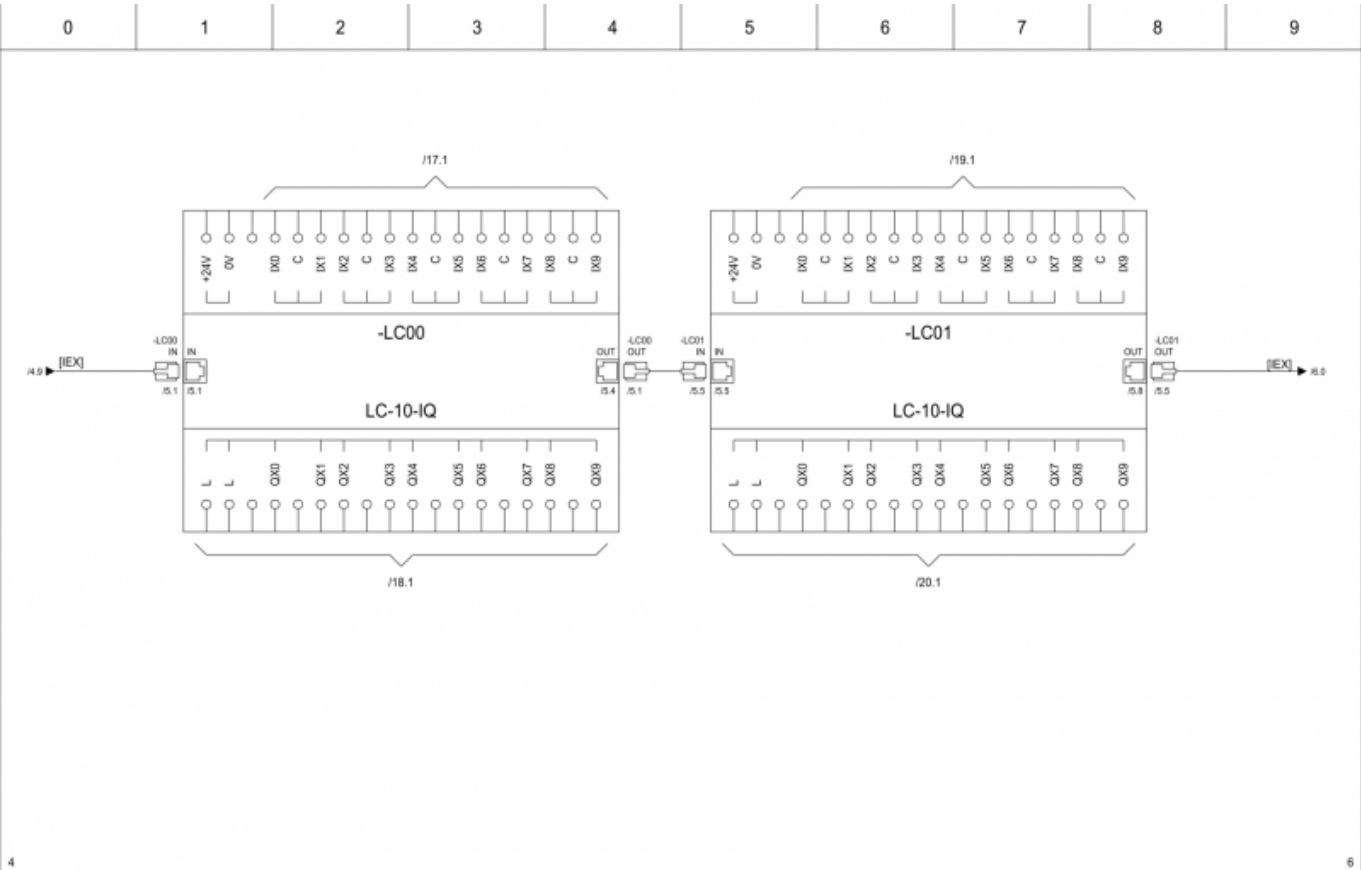


			Last changed by GK		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	CONTROL SYSTEM			Drawing number		Installation =									
			Last changed 20/10/2016			HIQ wiring diagrams			001		Location +									
Rev			Revision text						Pages		38		Page number 5							
0			1		2		3		4		5		6		7		8		9	

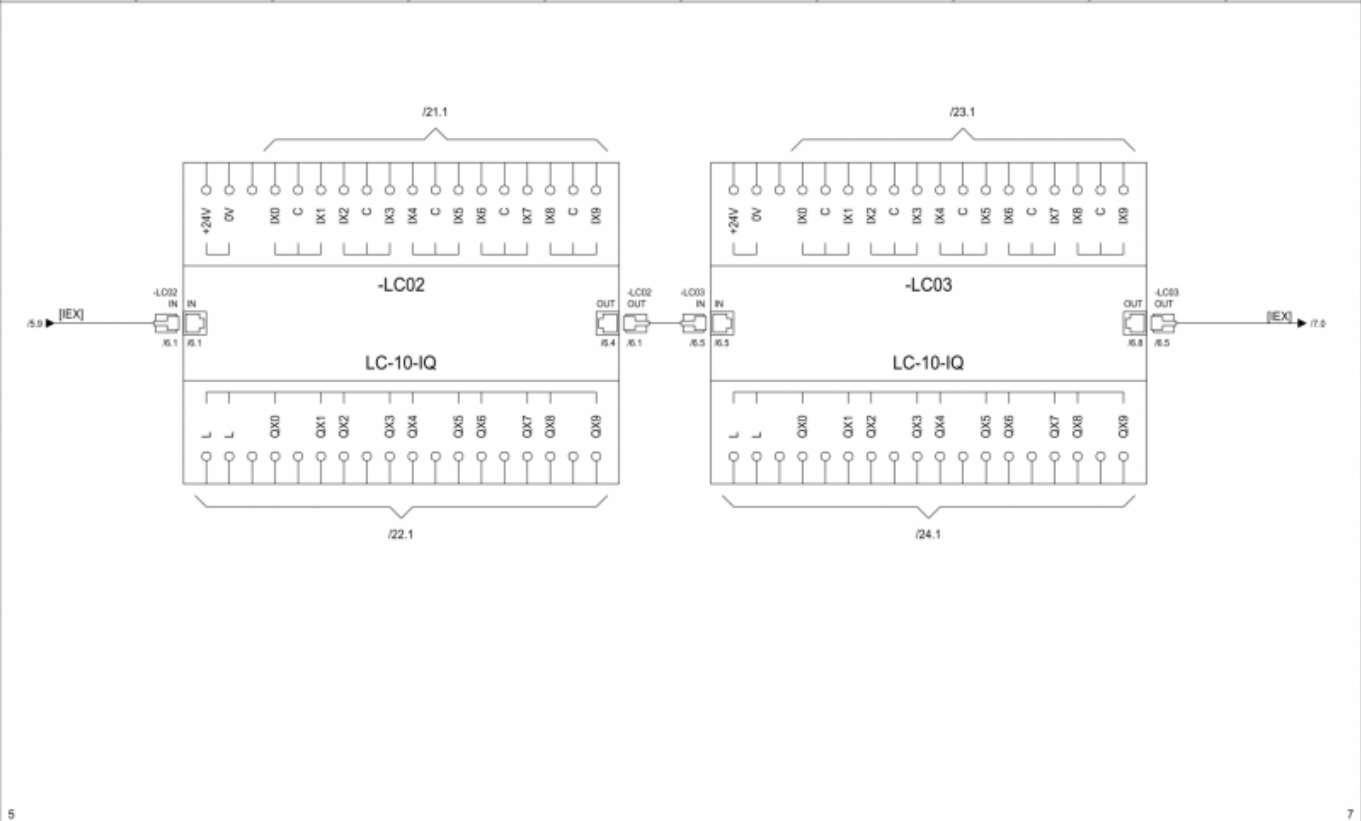

				Last changed by GK	 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	CONTROL SYSTEM		Drawing number	Installation	=
				Last changed 20/10/2016		HIQ wiring diagrams		001	Location	+
Rev	Revision text		Signature	Date				Pages	38	Page number


Page 7 - CS - Light dimmer

Up to 4 light dimmers can be connected to 1 HC. On sample plan we use 2 [Light dimmers drivers](#) for [LUD-12](#) universal light dimmers.

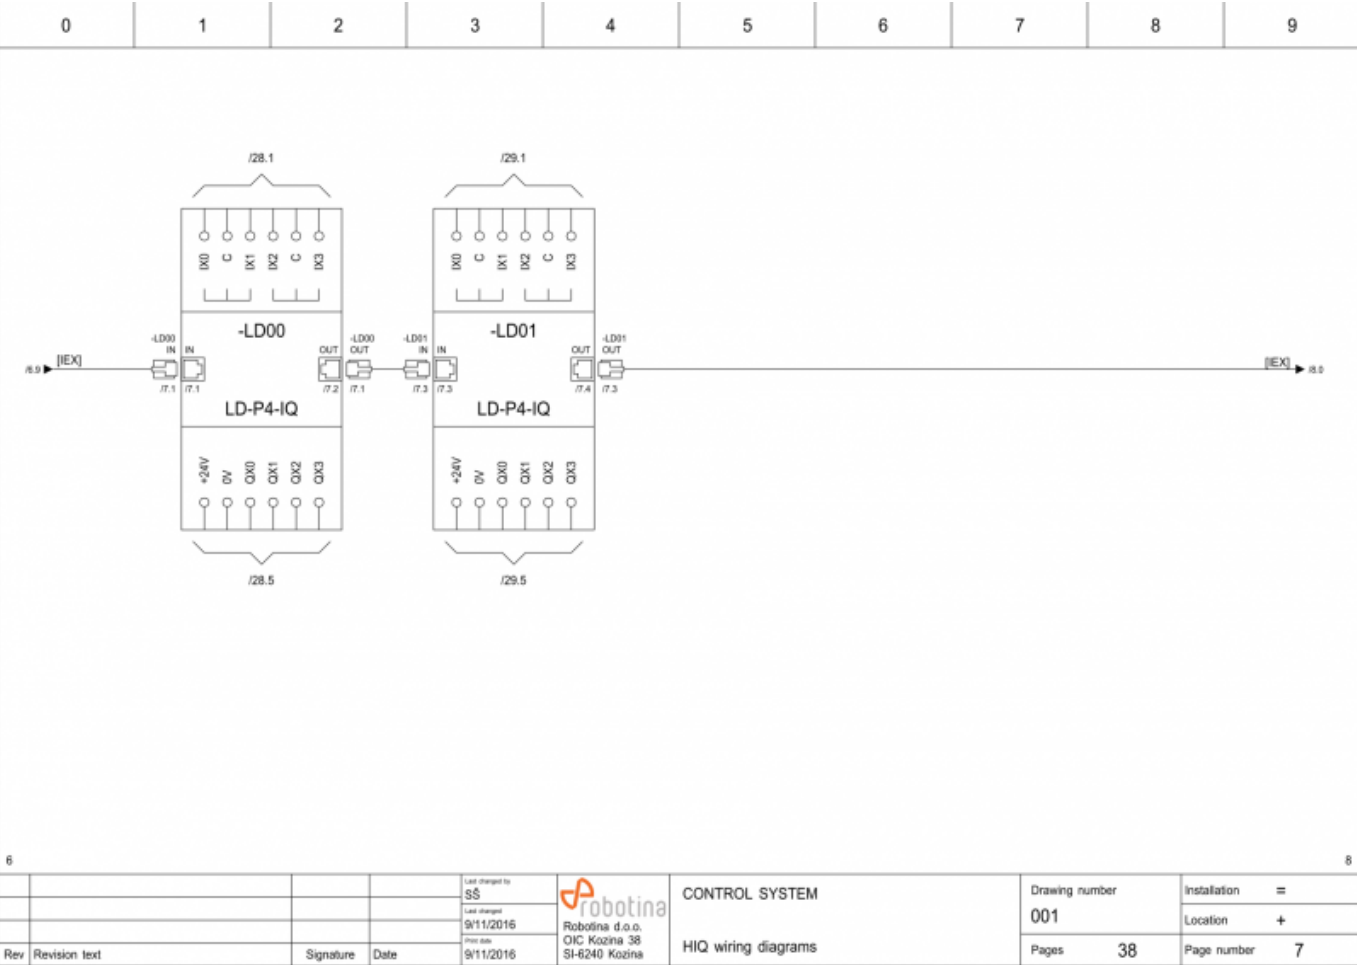

Page 8 - CS - Blinds controllers


Up to 2 [Blinds controllers \(BC\)](#) can be connected to 1 HC.

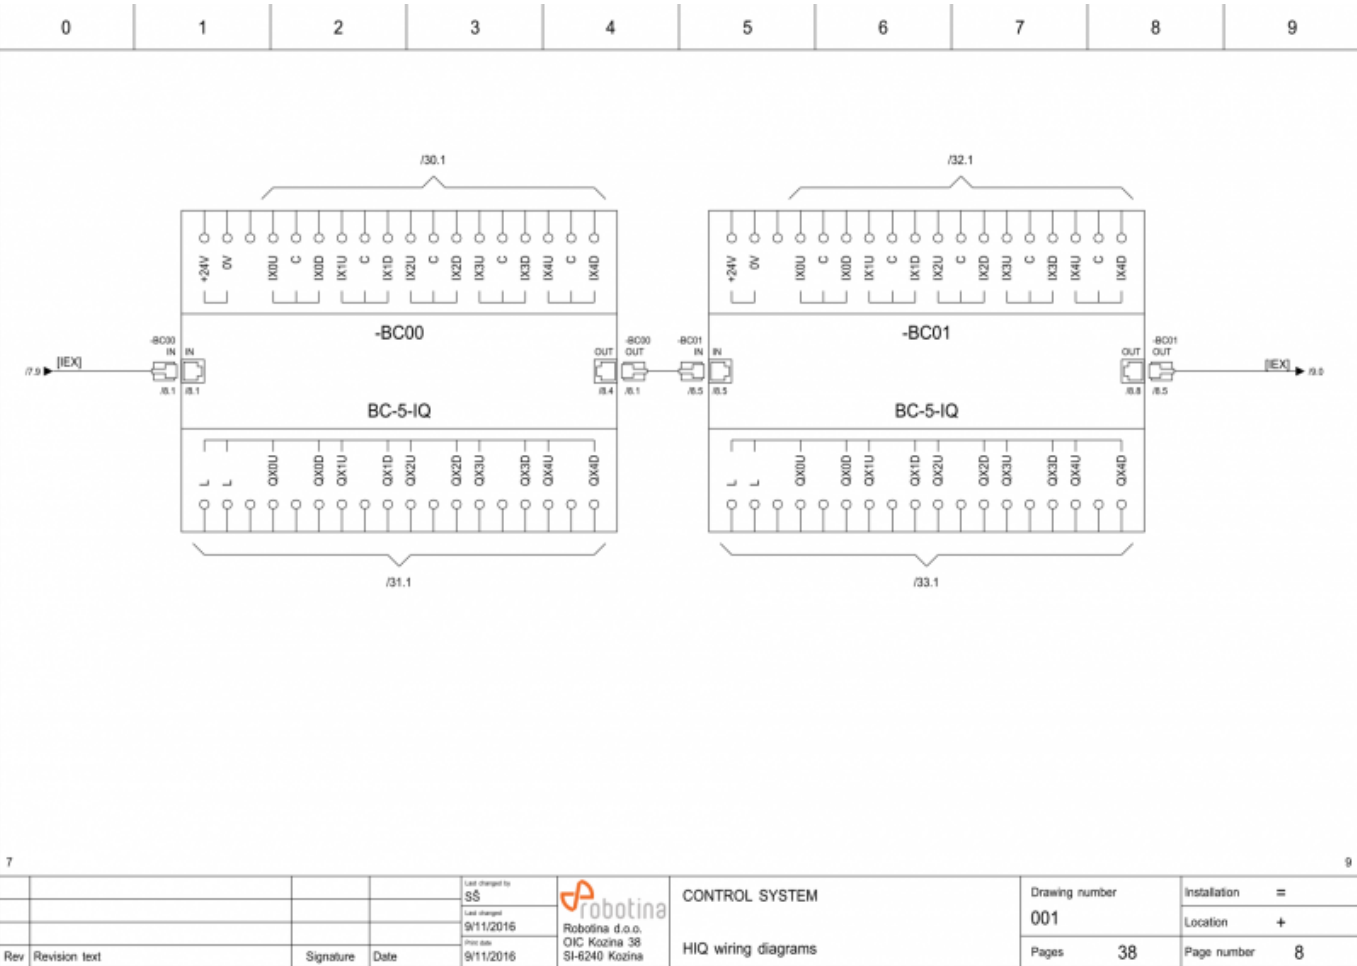

Page 9 - CS - bus extender, LED light dimmer


Bus extender (BE) is a passive switch for easy IEX bus interconnection between cabinet and field modules.

Up to 4 light dimmers can be connected to 1 HC. On sample plan we use 2 LED stripe dimmers.

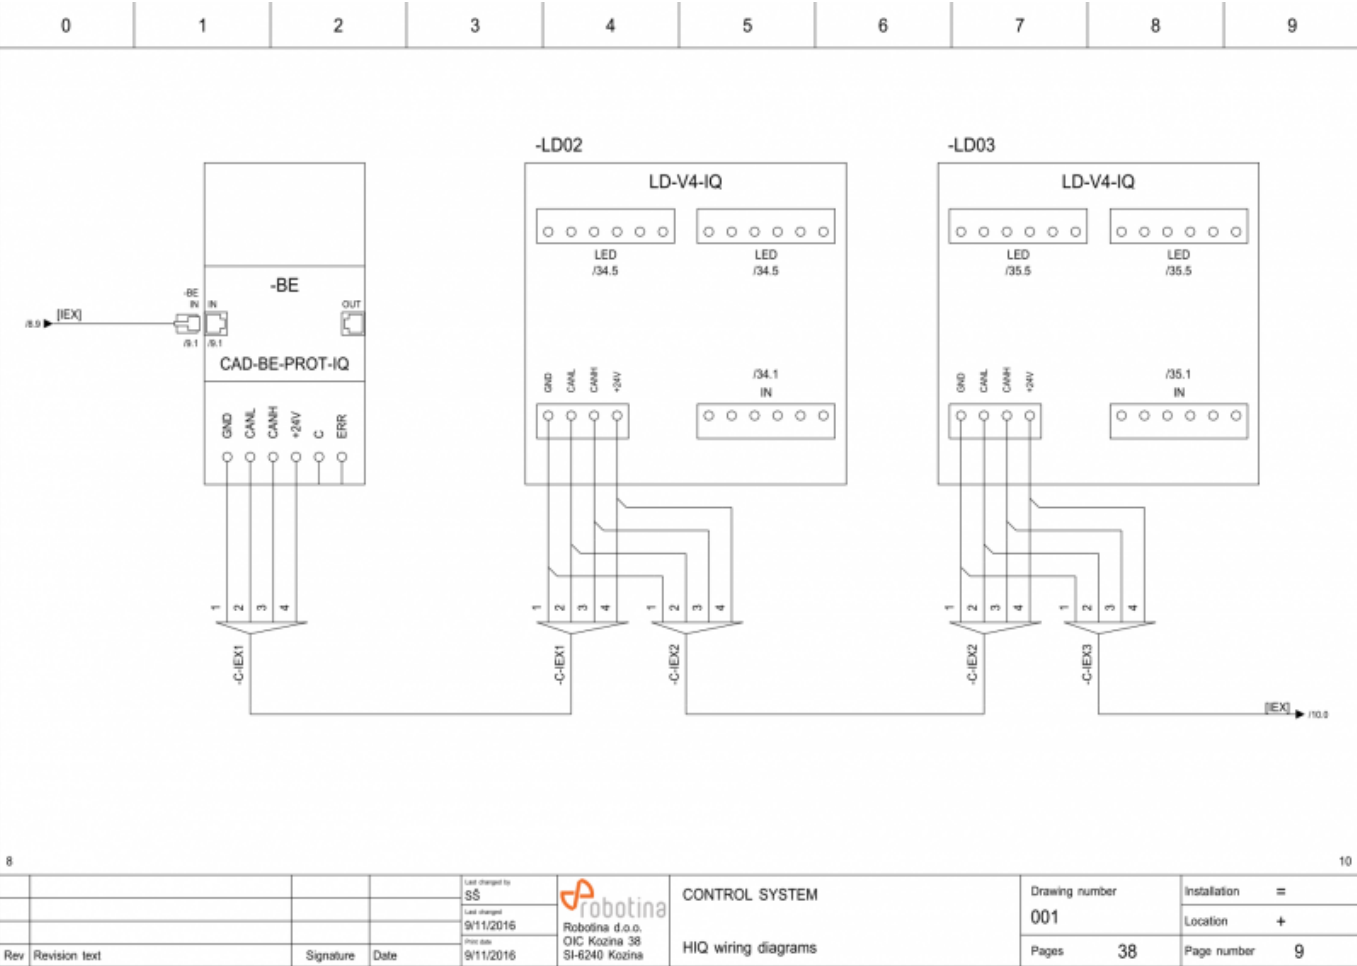

Page 10 - CS - Scene controllers


Up to 4 Scene Controllers can be connected to 1 HC. On sample plan are 4 [Scene Touch Panels](#), but also [Scene Panels](#) and [Scene controllers](#) can be connected in the same way.

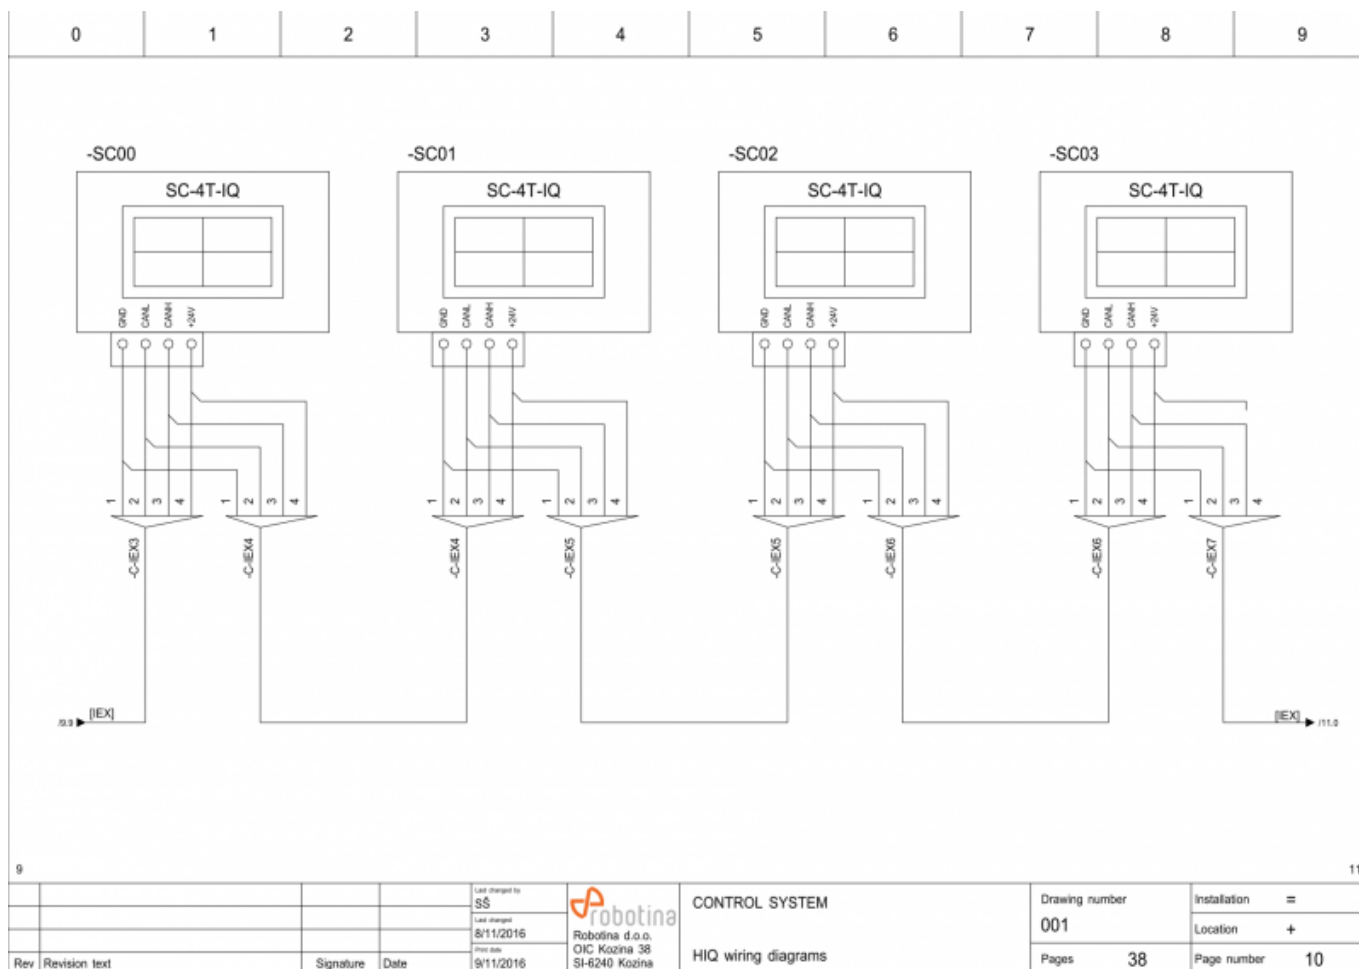


Page 11-12 - CS - Thermostats

Up to 5 Thermostats can be connected to 1 HC. On sample plan we use 5 [Touch buttons electronic thermostats](#), but also ordinary [Electronic thermostats](#) and [Blind electronic thermostats](#) can be connected in a similar way.

Optionally we can connect window switch on each thermostat (sample on -TH02 and -TH03) (not possible with [Blind electronic thermostat](#)).

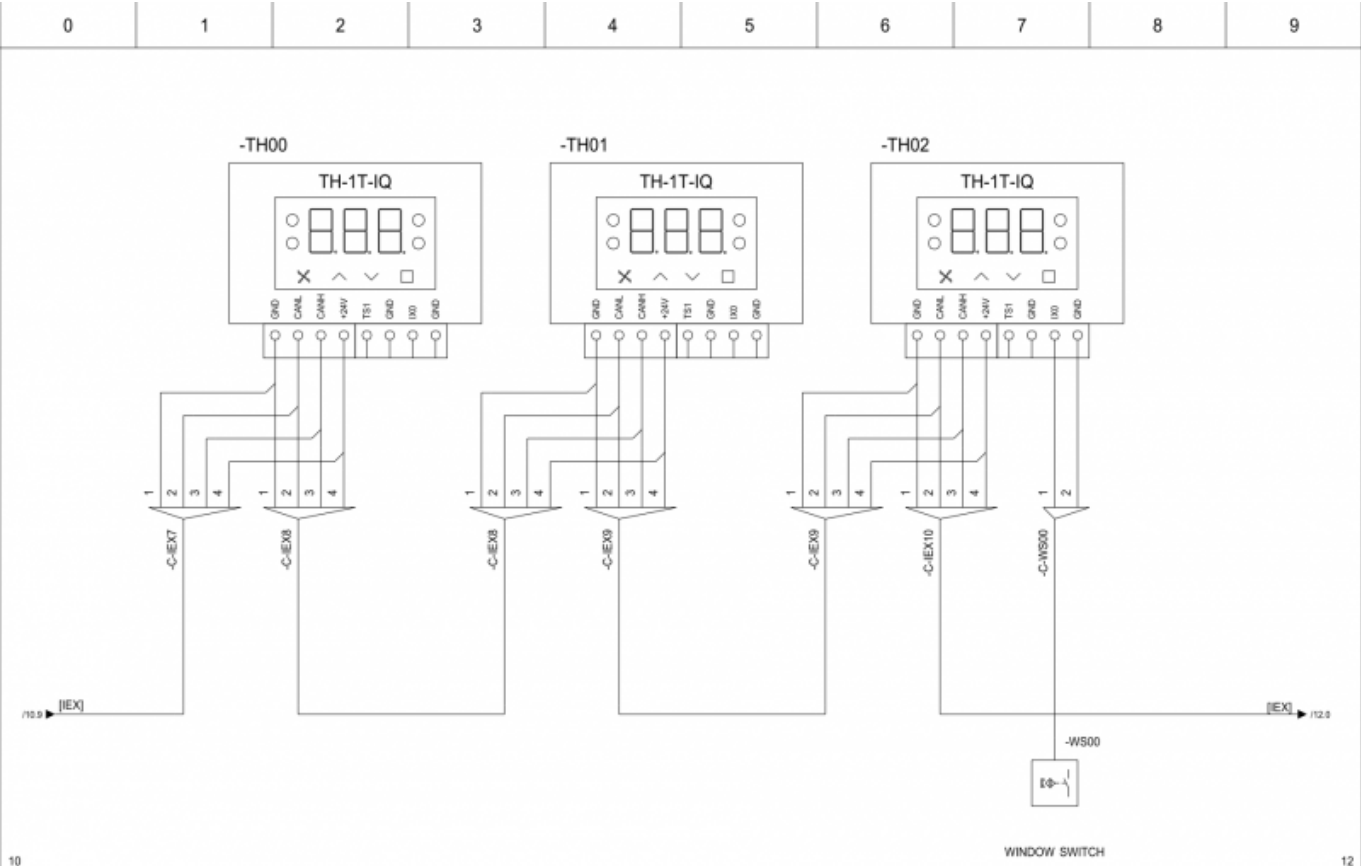

					Last changed by SS		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	CONTROL SYSTEM			Drawing number 001		Installation =	
					Last changed 8/11/2016			HIQ wiring diagrams			Pages 38		Location +	
Rev			Revision text		Signature			Date		Page number 11				
0			1		2			3		4		5		6
7			8		9									

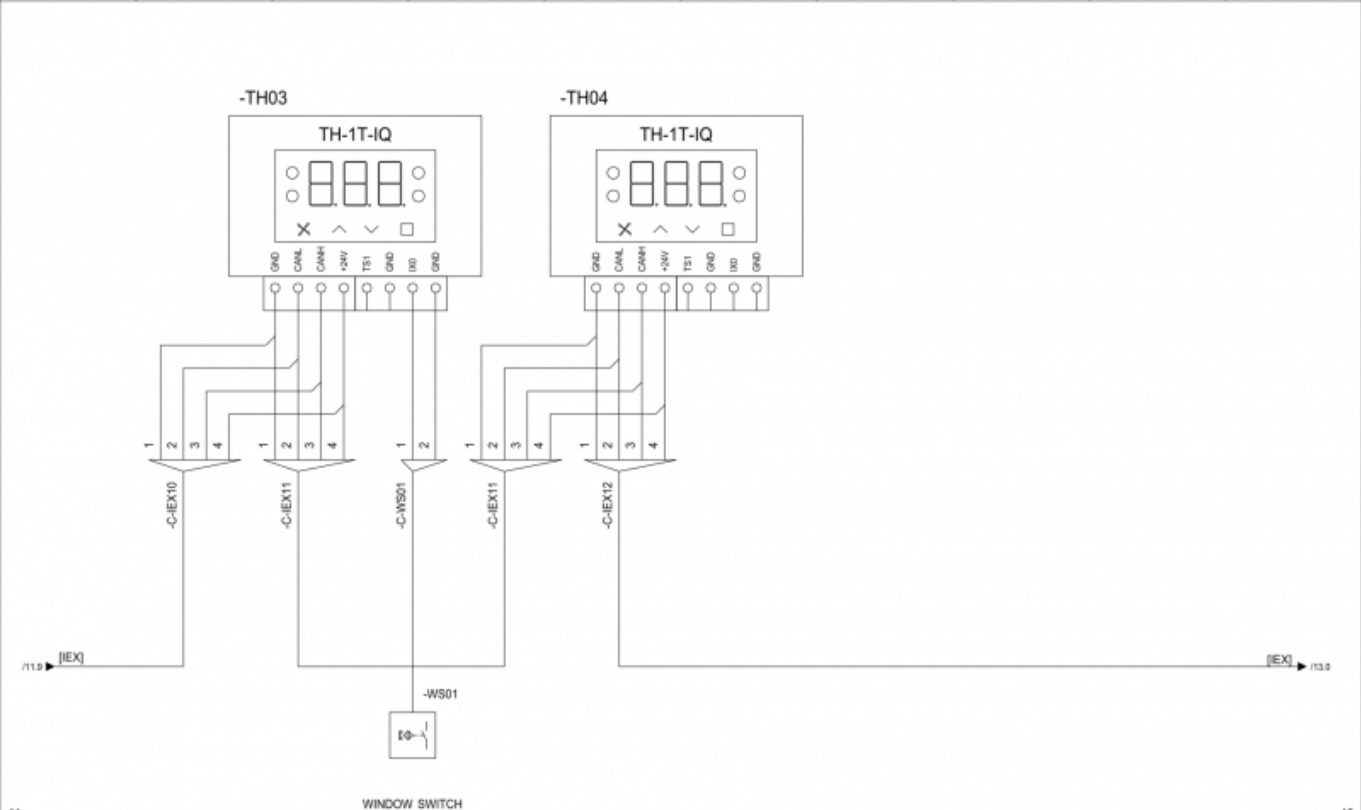


				Last changed by SS		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	CONTROL SYSTEM		Drawing number 001		Installation =	
				Last changed 8/11/2016			HIQ wiring diagrams		Pages 38		Location +	
Rev				Revision text			Signature		Date		Page number 12	
0				1			2		3		4	

Page 13 - CS-Fan-coil


Up to 5 Fan-coil controllers (FC) can be connected to 1 HC. On our sample plan we have 3 FC, 2 thermostats are controlling radiator valves (page 36-38).

FC controllers are the last items on IEX bus. Longer IEX bus lines (over 100m) must be terminated with a 120ohm resistor between CANL and CANH (-R1).

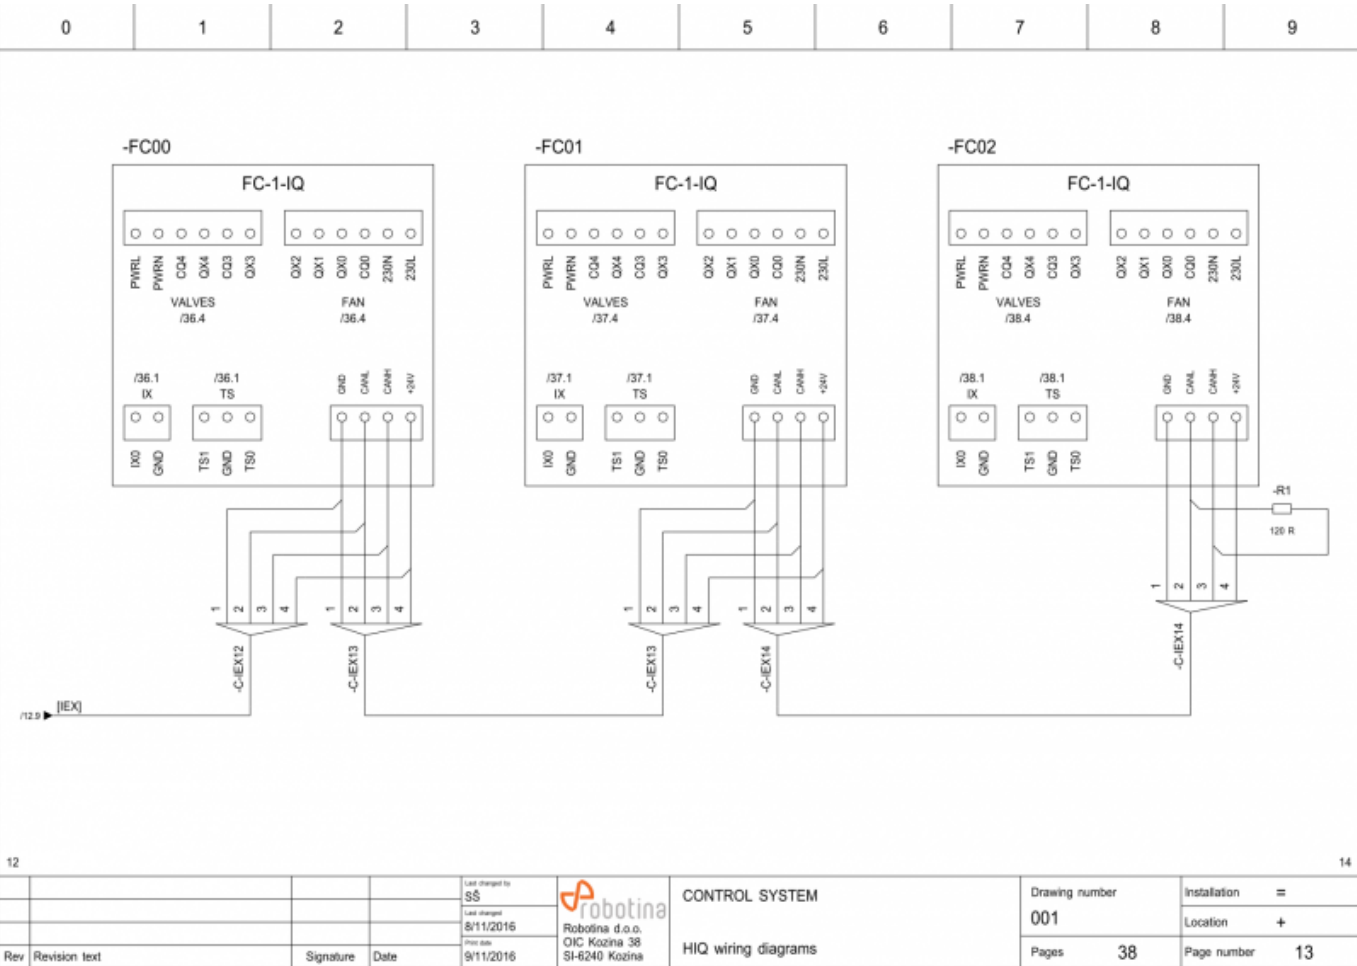


Page 14 - CS-Blank page

Blank page for future extensions.

0	1	2	3	4	5	6	7	8	9				
SPARE PAGE - INTENTIONALLY LEFT BLANK													
13													
15													
				Last changed to GK		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina		CONTROL SYSTEM		Drawing number 001		Installation =	
				Last changed 19/8/2016				Location +					
				Print date 9/11/2016				HIQ wiring diagrams		Pages 38		Page number 14	
Rev	Revision text			Signature	Date								

Page 15 - Home controller inputs

If used, optional [lightness sensor](#) must be connected to IW0 analog input on [home controller](#).
 All other inputs are left for custom programming solutions (10 digital inputs IX0-IX7, IX8A, IX9B and 3 8-bit analog inputs IW1-IW3).

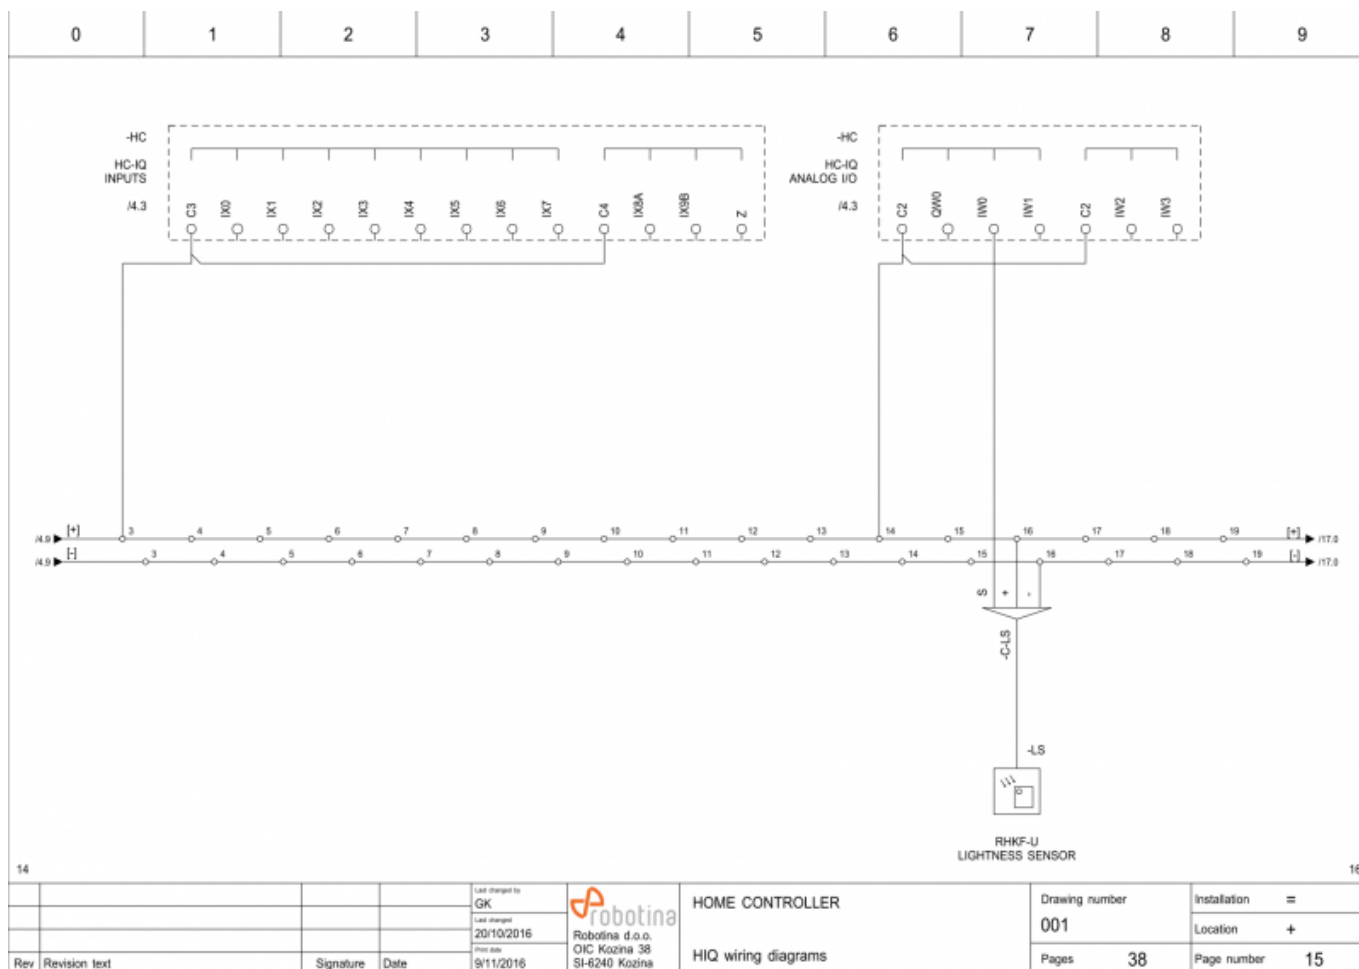

Page 16 - Home controller outputs

QX0-QX4 outputs - can be used for radiator valves or to control other heating/cooling devices. Internal relay is used for valves, other loads are recommended to use an additional 16A installation relay.


In our plan we use 2 radiator valves (and 3 [Fan-coil controllers](#)).

QX5 output - is used for Air Conditioner.

QX6 output - is used for Boiler.


QX7 output - is used for Chiller.

All three outputs are connected to external installation relays (-K.A, -K.B and -K.C) .

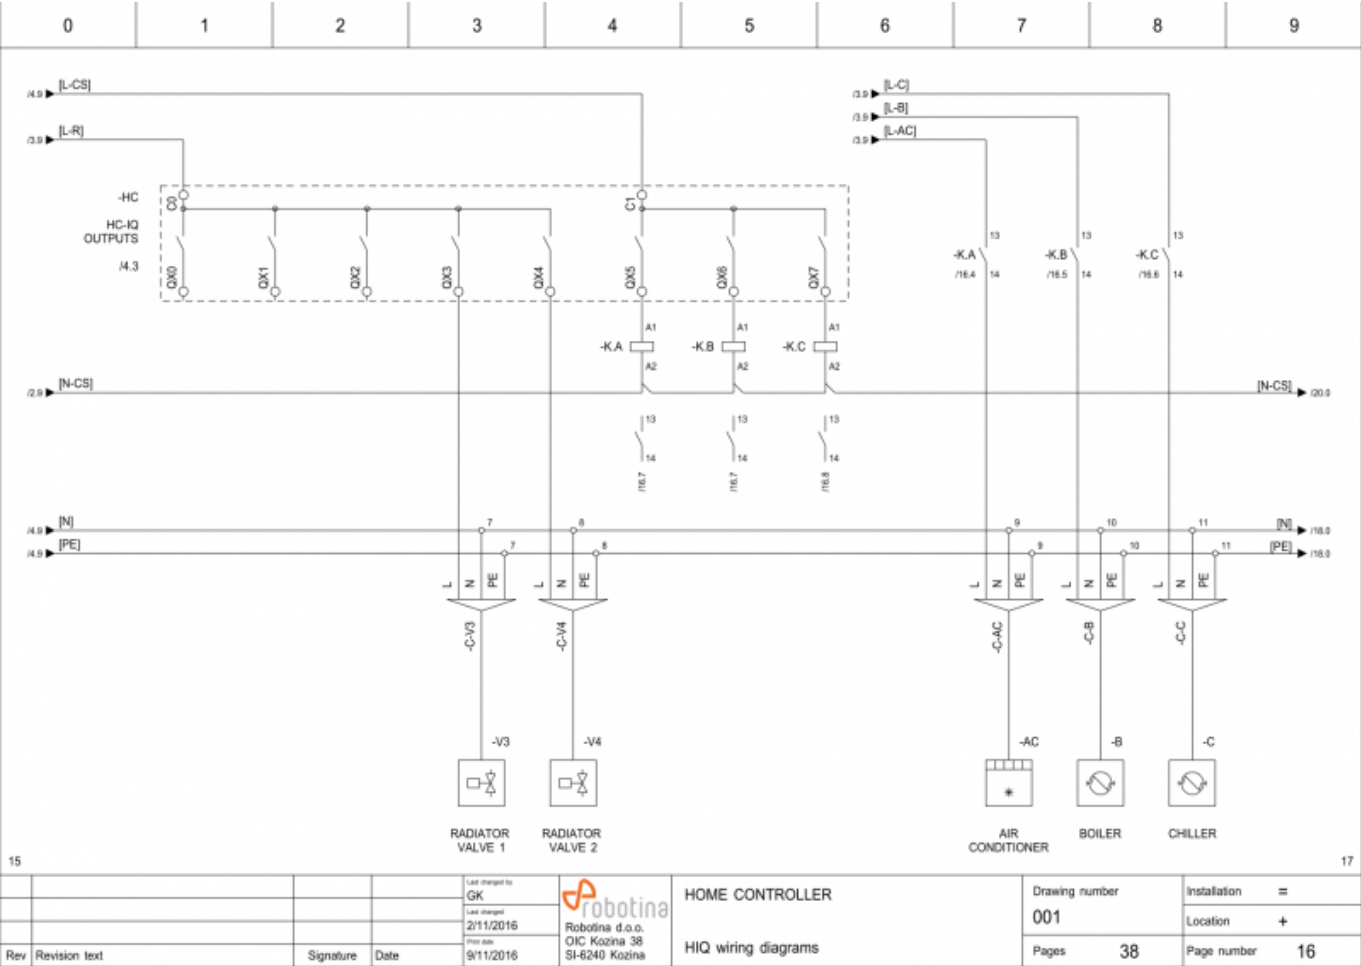


Page 17-24 - Light controller


Lights and managed power sockets are connected to [Light controllers](#) .
Several button combinations are possible.
Managed power sockets should be connected through installation relays (-K12-K14, -K22-K23 and -K30-K33).

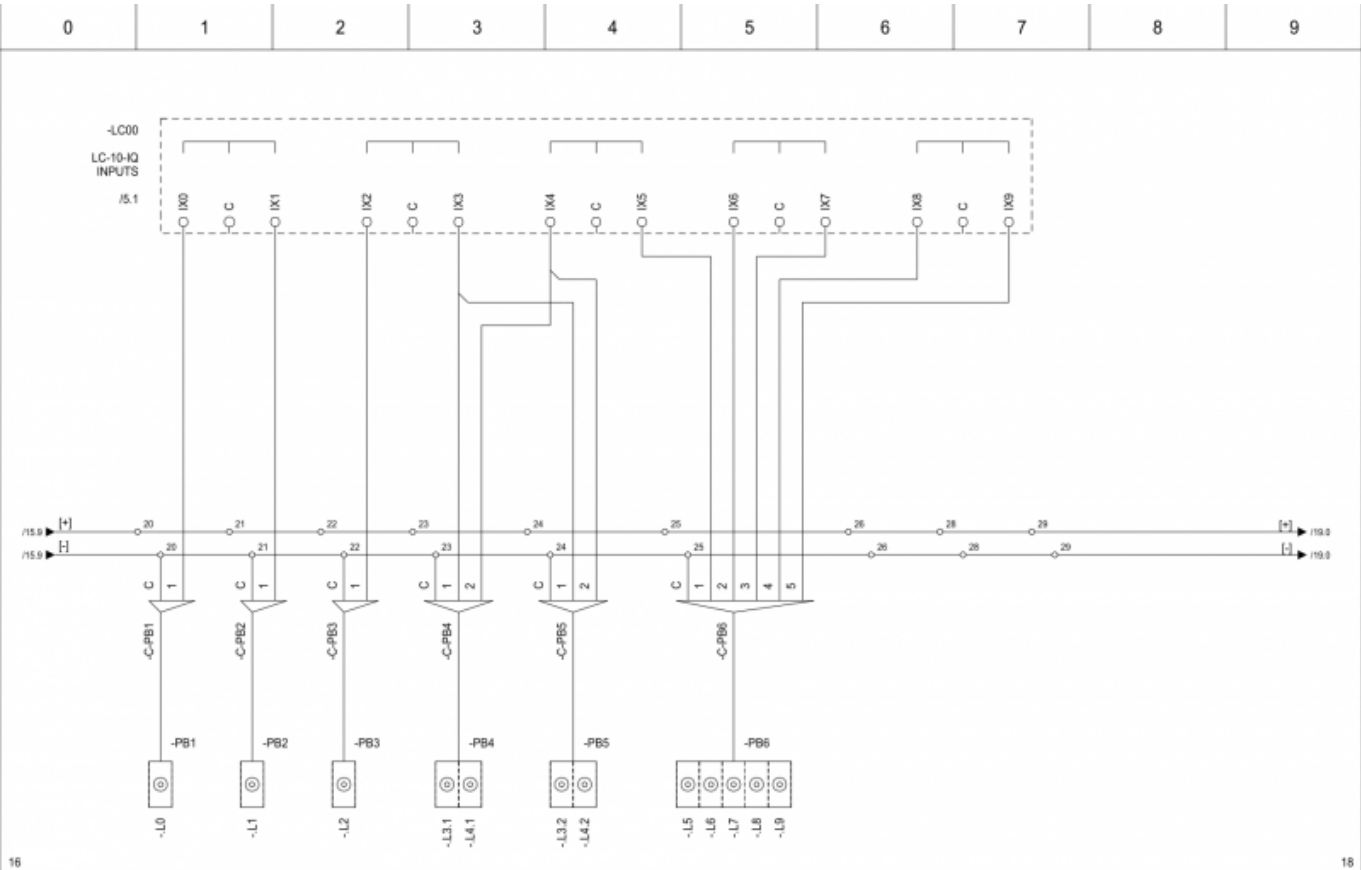


				Last changed by GK	 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	LIGHT CONTROLLER		Drawing number	Installation =	
				Last changed 20/10/2016		HIQ wiring diagrams		001	Location +	
Rev	Revision text		Signature	Date		9/11/2016			Pages 38	Page number 17

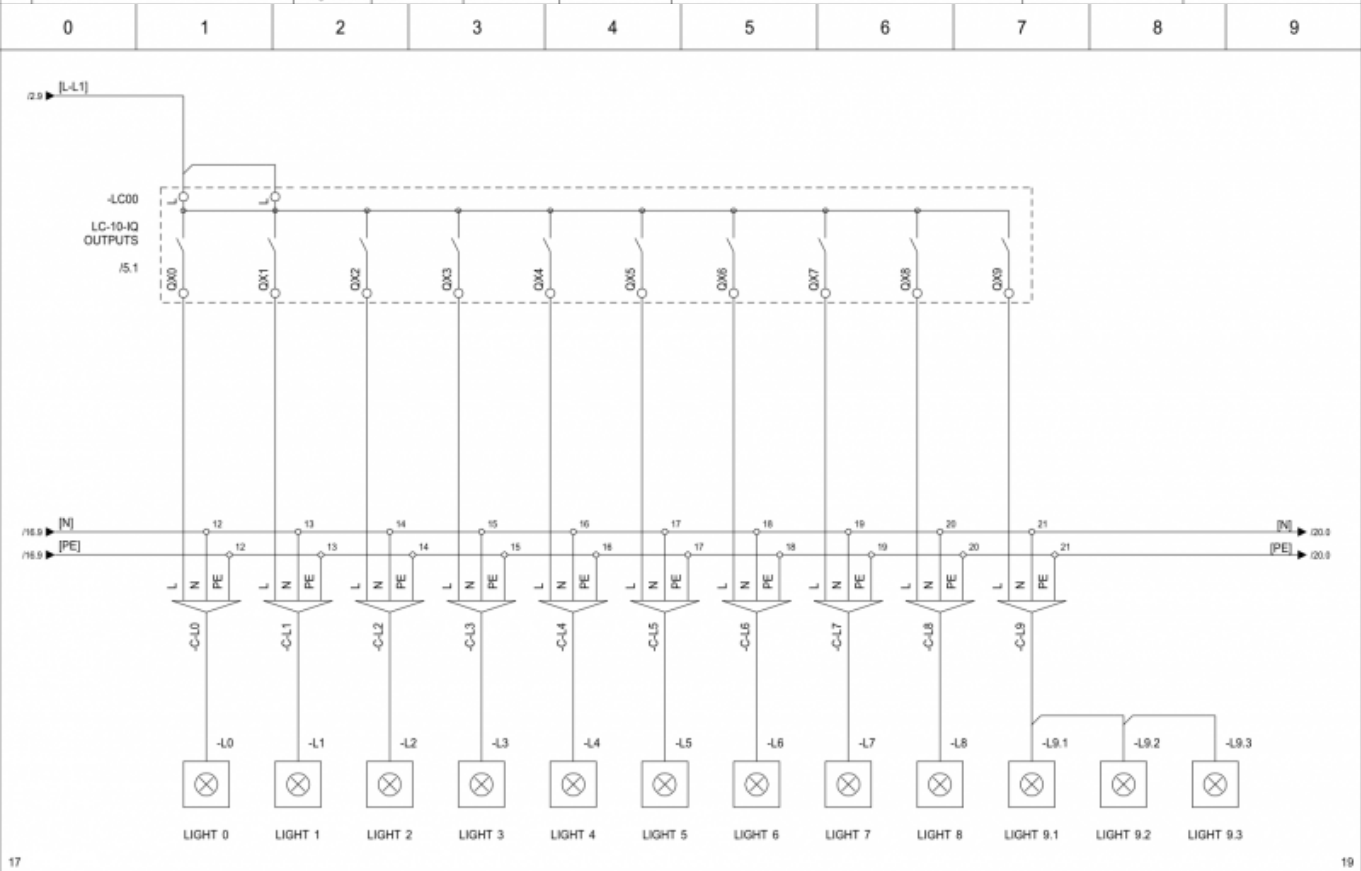


				Last changed by SS	 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	LIGHT CONTROLLER		Drawing number	Installation	=
				Last changed 8/11/2016		HIQ wiring diagrams		001	Location	+
Rev	Revision text		Signature	Date				Pages	38	Page number

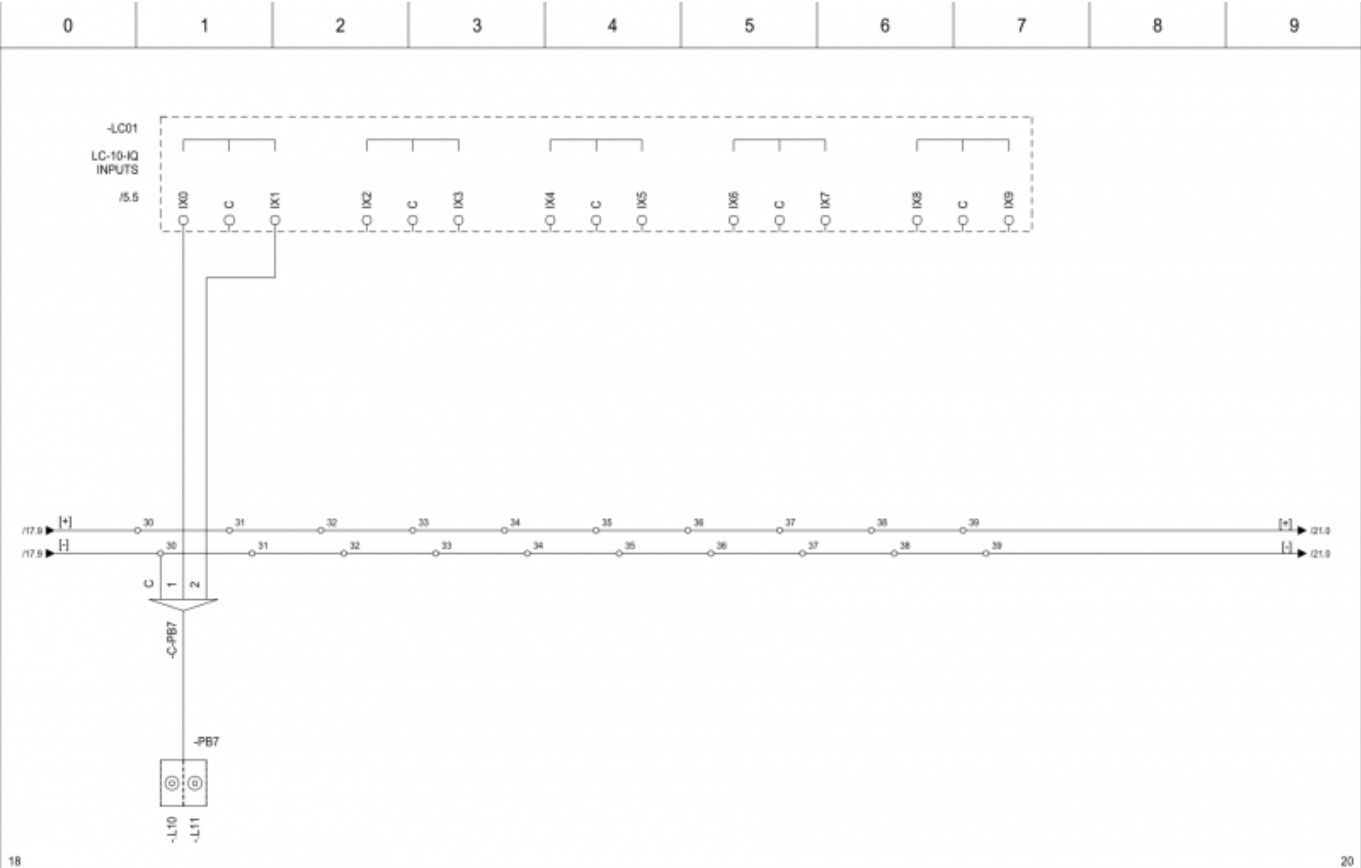


				Last changed by GK		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	LIGHT CONTROLLER		Drawing number 001		Installation =	
				Last changed 20/10/2016			HIQ wiring diagrams				Location +	
Rev		Revision text		Signature			Date		Pages 38		Page number 19	
							9/11/2016					

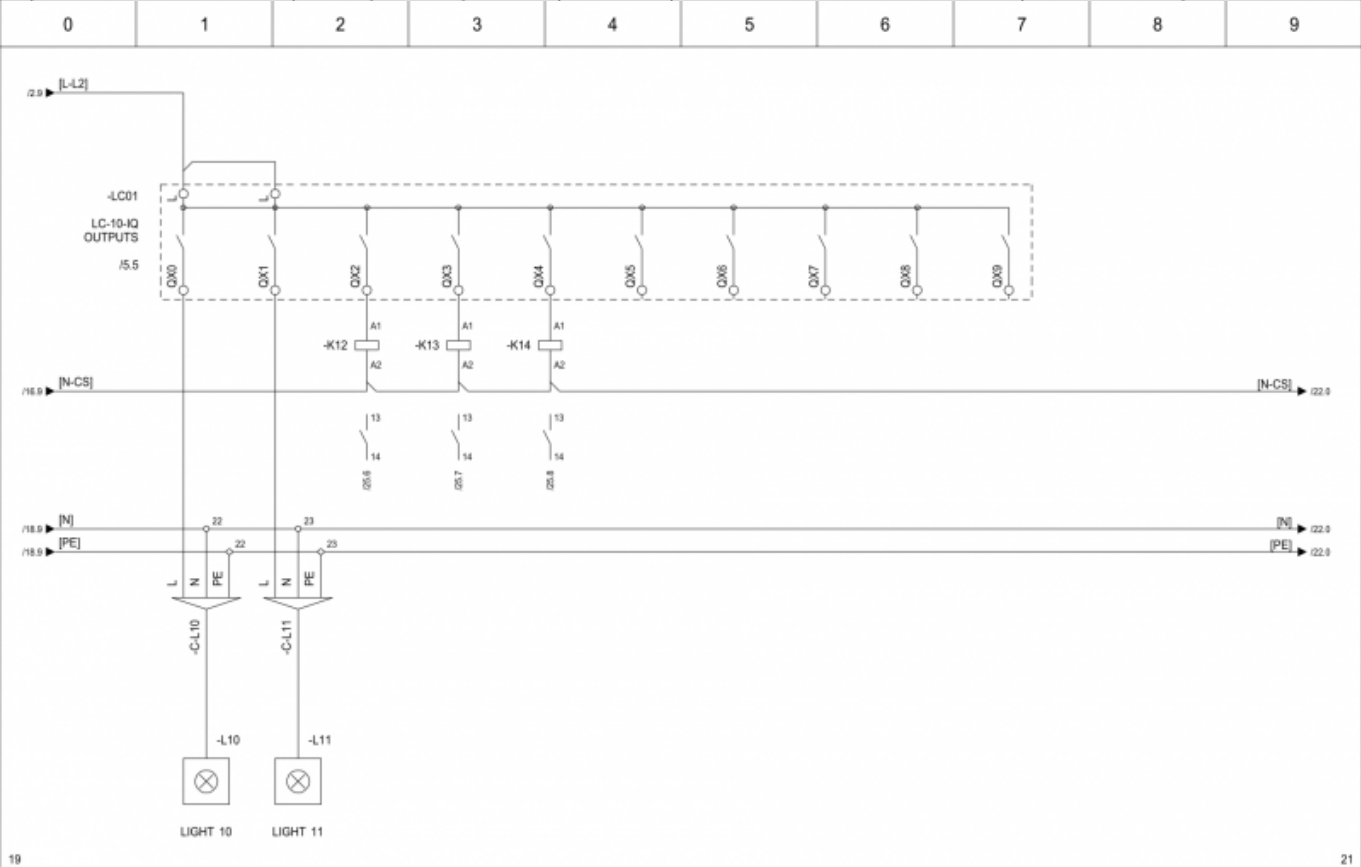

				Last changed by SS	 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	LIGHT CONTROLLER		Drawing number 001		Installation =		
				Last changed 9/11/2016		HIQ wiring diagrams				Location +		
Rev		Revision text							Pages 38		Page number 20	
				Signature		Date						

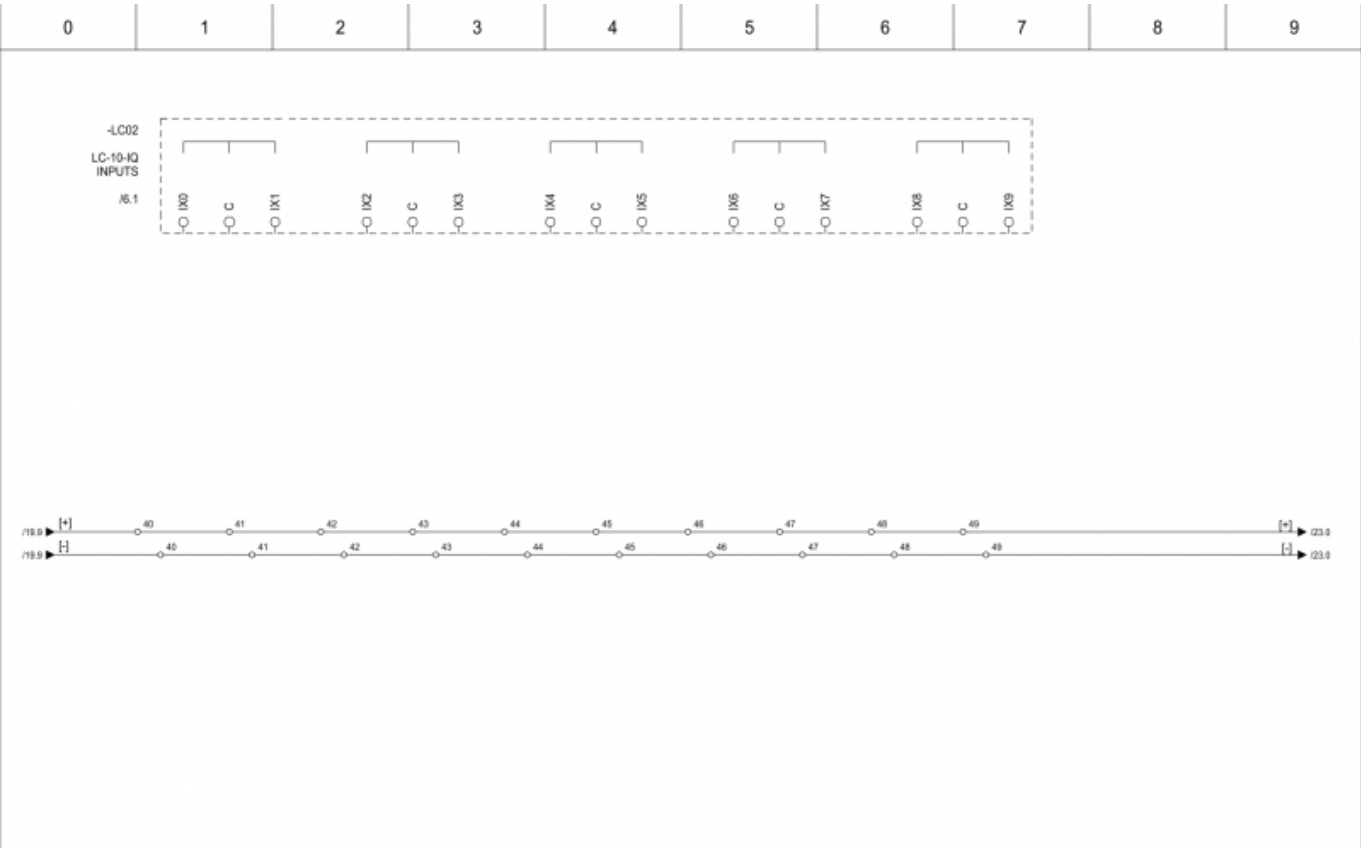


20										22									
				Last changed by GK		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	LIGHT CONTROLLER				Drawing number 001		Installation =						
				Last changed 20/10/2016			HIQ wiring diagrams				Location +								
Rev		Revision text		Signature			Date		9/11/2016		Pages 38		Page number 21						

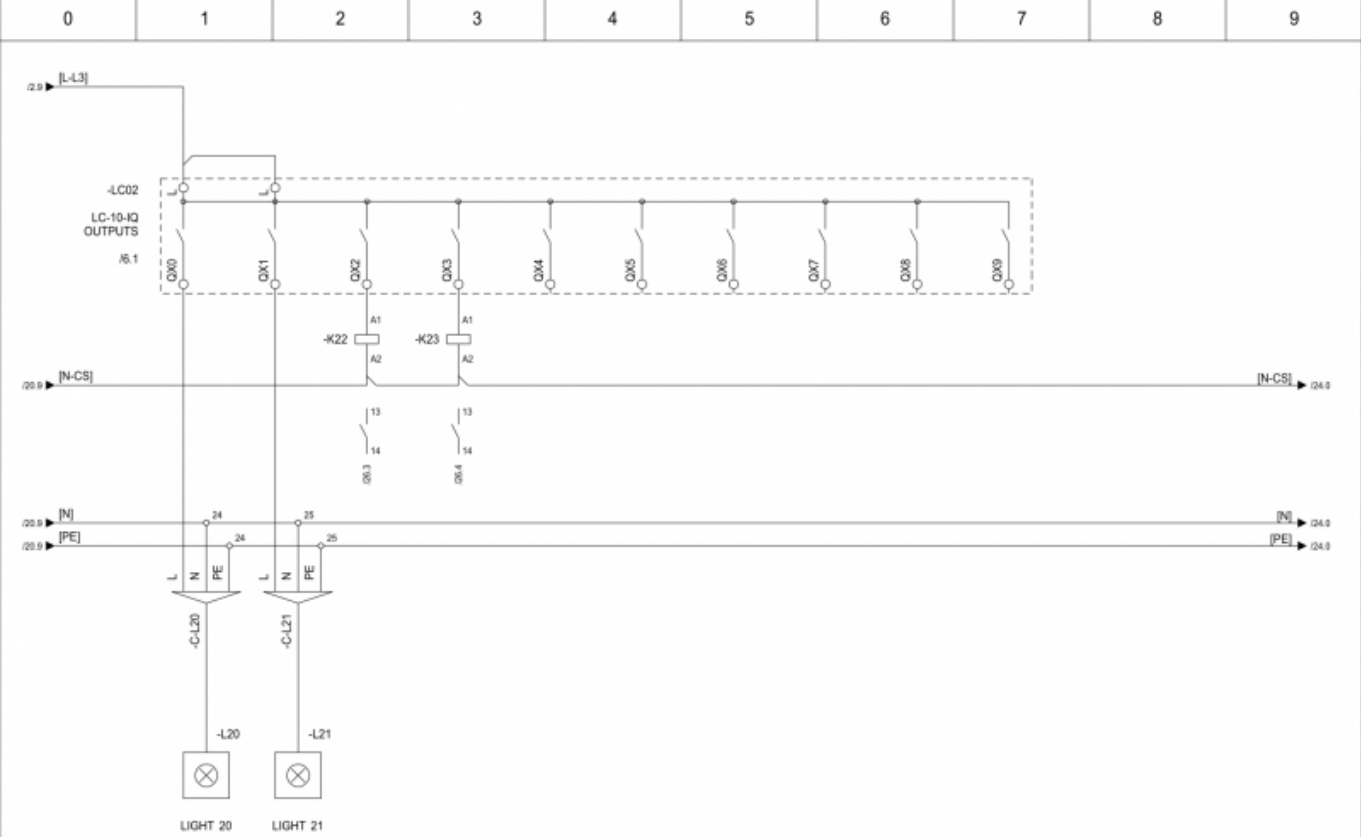

21										23	
					Last changed by GK	 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	LIGHT CONTROLLER		Drawing number	Installation =	
					Last changed 2/11/2016		HIQ wiring diagrams		001	Location +	
Rev	Revision text			Signature	Date				Pages 38	Page number 22	
					9/11/2016						




--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

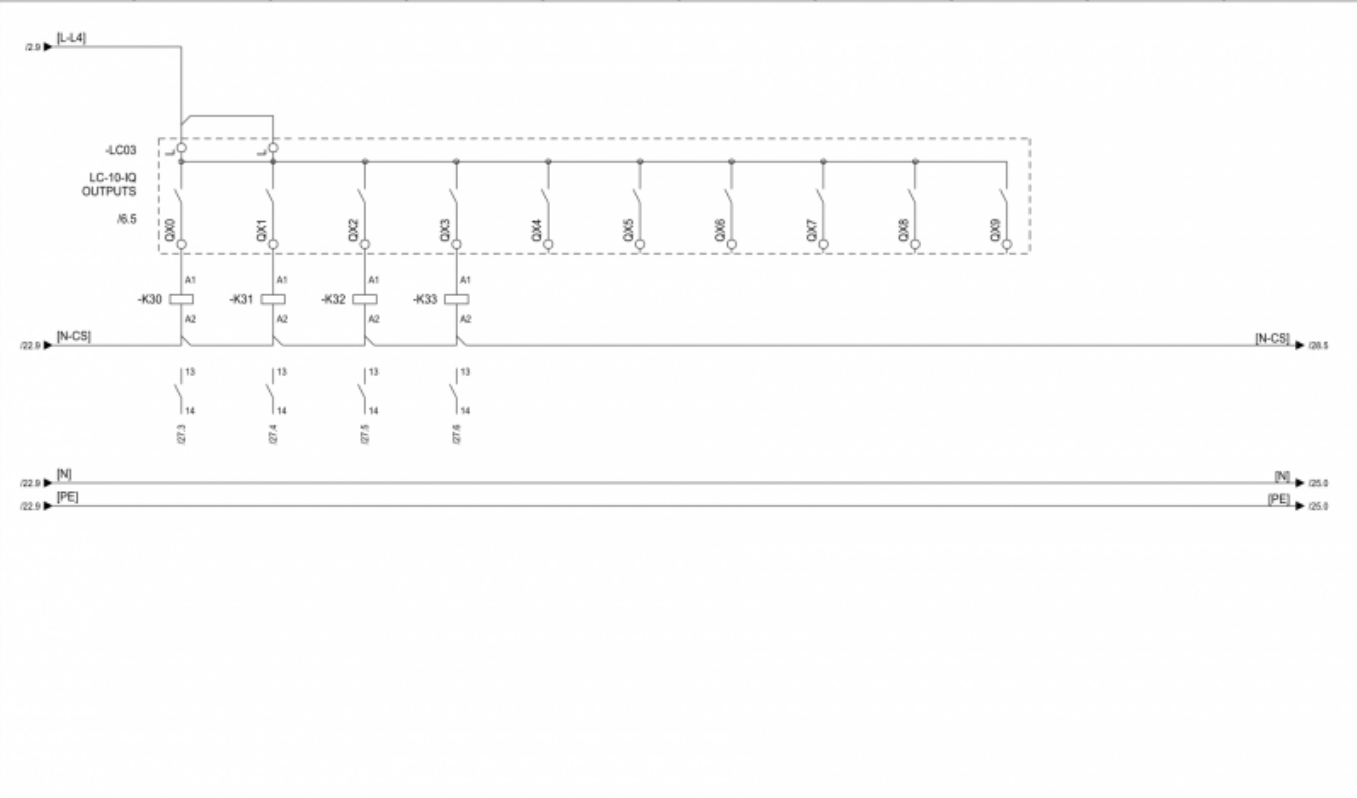


23										25									
						Last changed by GK		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina		LIGHT CONTROLLER				Drawing number		Installation =			
						Last changed 2/11/2016				HIQ wiring diagrams				001		Location +			
Rev		Revision text		Signature		Date				9/11/2016		Pages		38		Page number		24	


Page 25-27 - Power sockets

A sample plan assumes use of managed and unmanaged sockets. Managed sockets are connected to [Light controllers](#). External installation relays should be used on Light controller outputs.

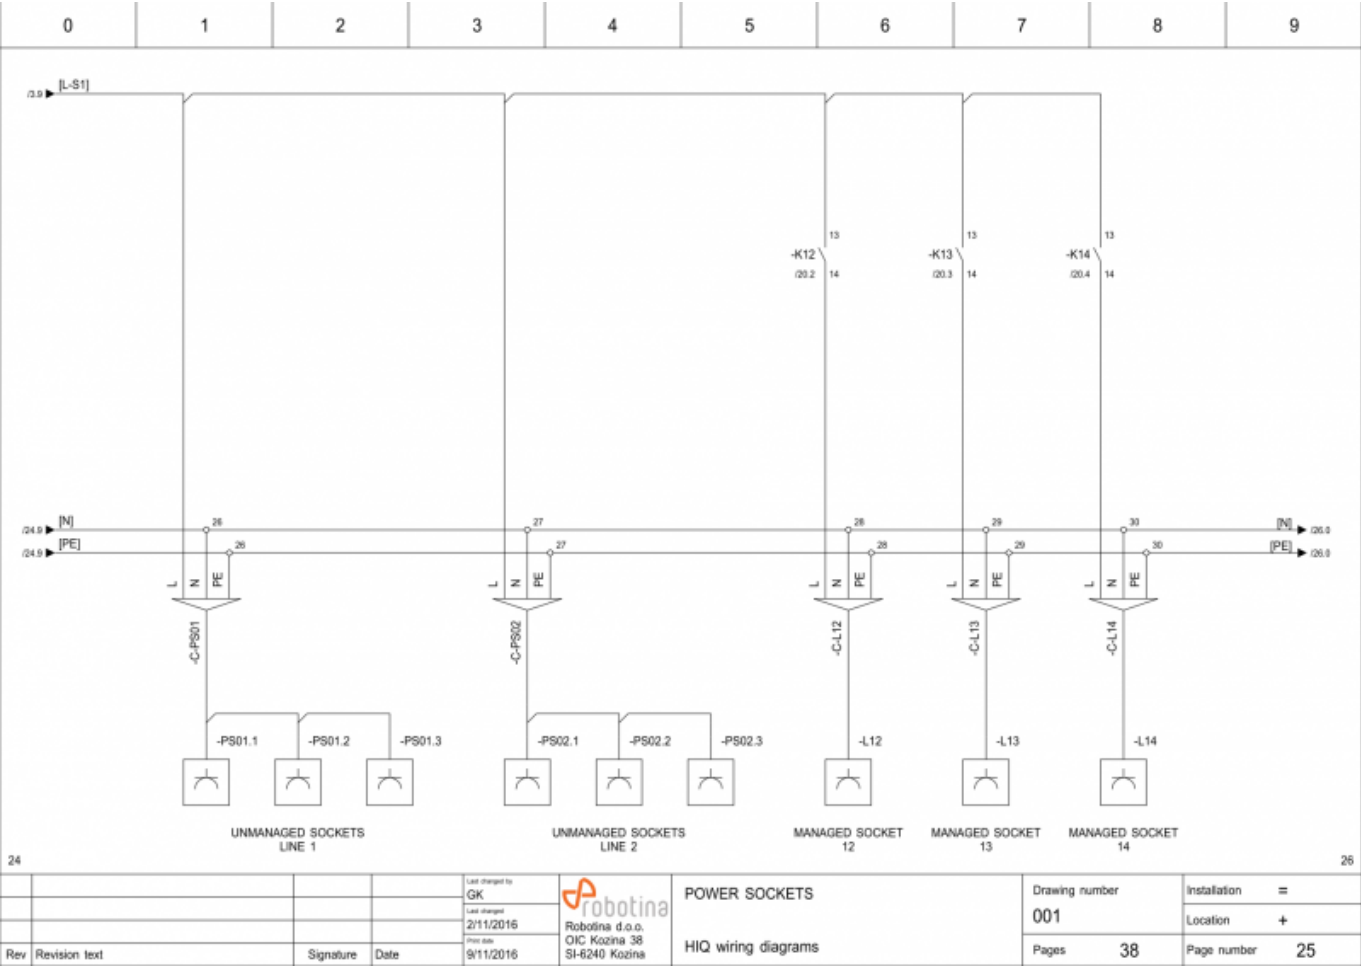

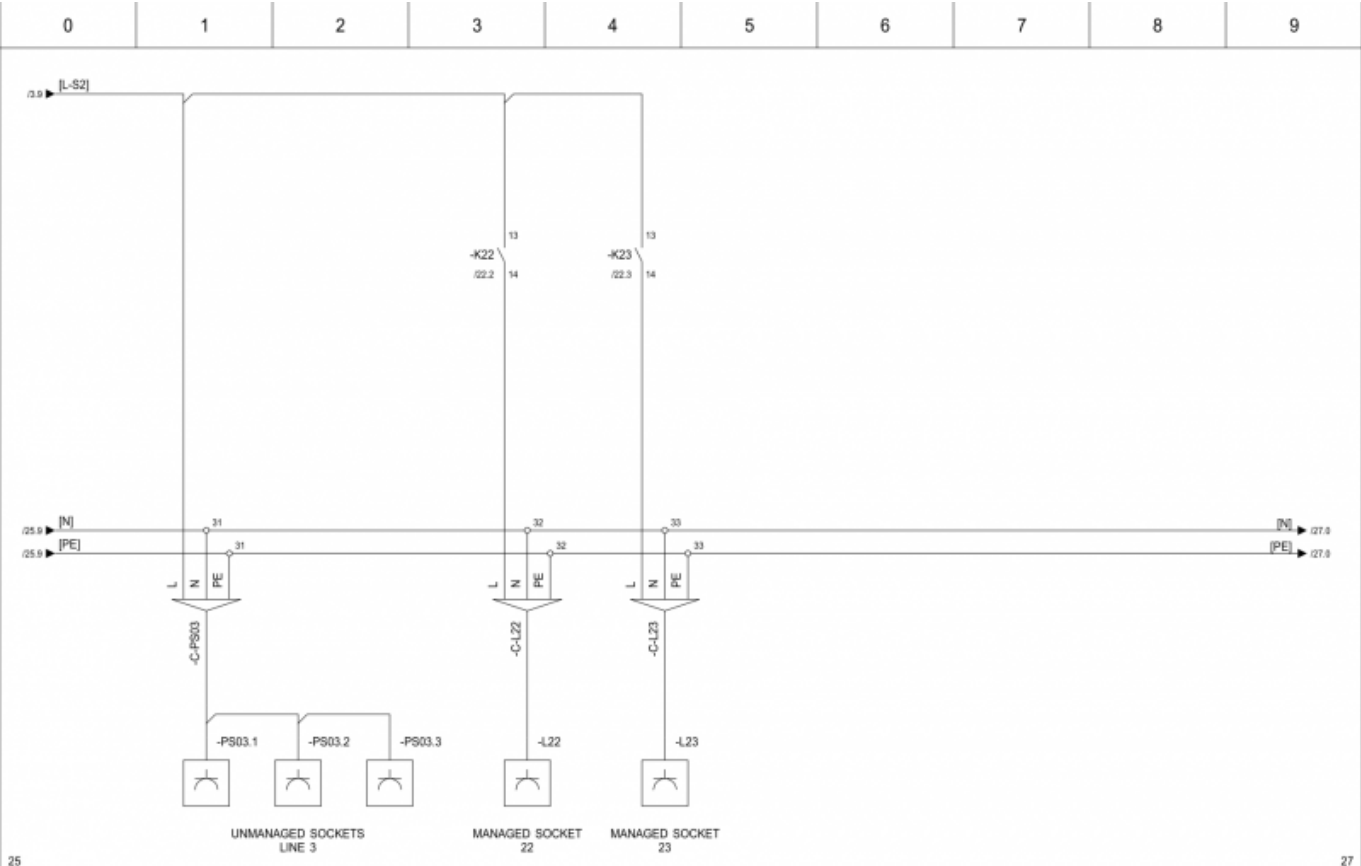


				Last changed by GK	 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	POWER SOCKETS	Drawing number		Installation =		
				Last changed 2/11/2016			001			Location +	
Rev	Revision text		Signature	Date			9/11/2016	HIQ wiring diagrams	Pages	38	Page number

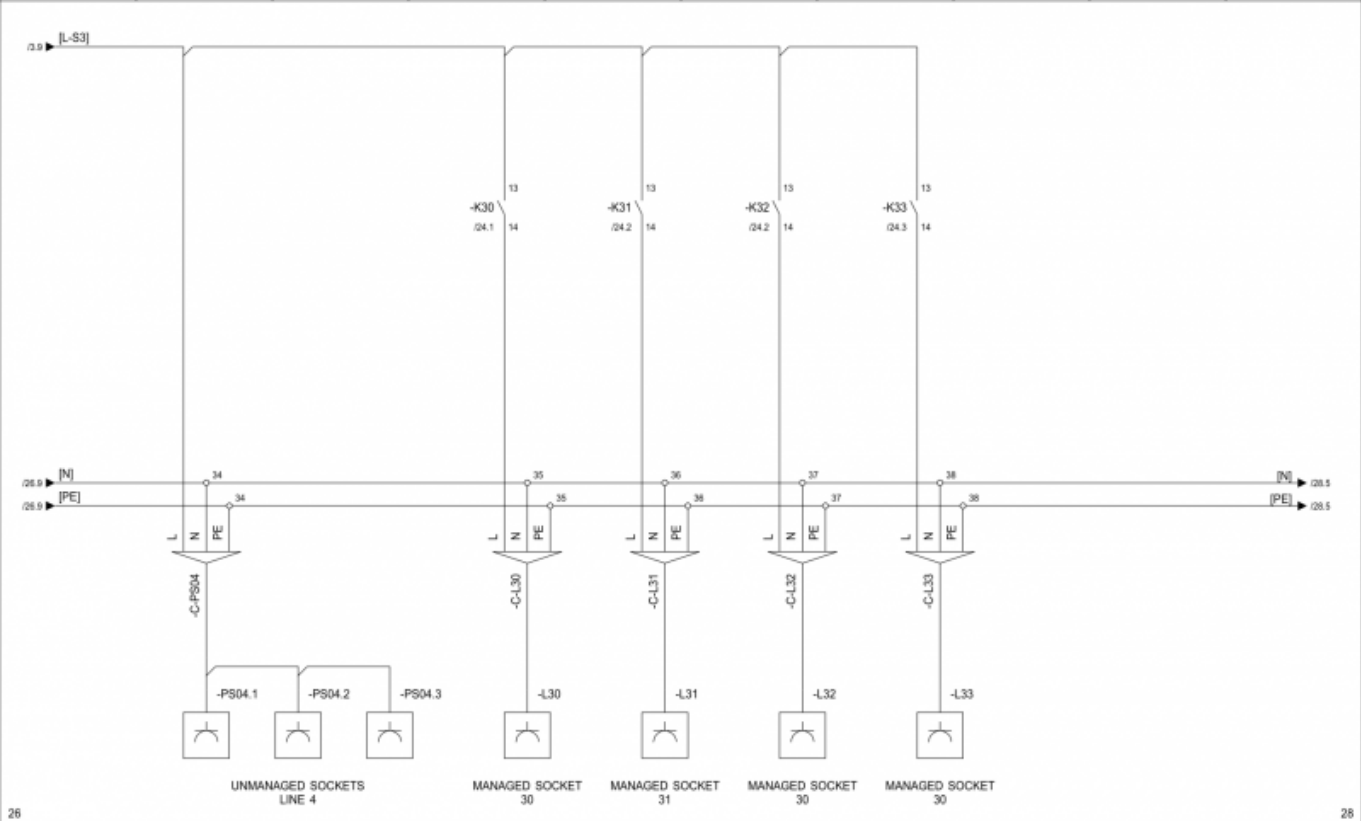


				Last changed by GK		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	POWER SOCKETS		Drawing number 001		Installation =		
				Last changed 2/11/2016							Location +		
Rev		Revision text		Signature			Date		Pages 38		Page number 27		
						9/11/2016		HIQ wiring diagrams					

Page 28-29 - Light dimmers


On sample plan we use 2 [Light dimmers drivers](#). On each driver we can connect up to 4 [LUD-12](#) universal light dimmers.

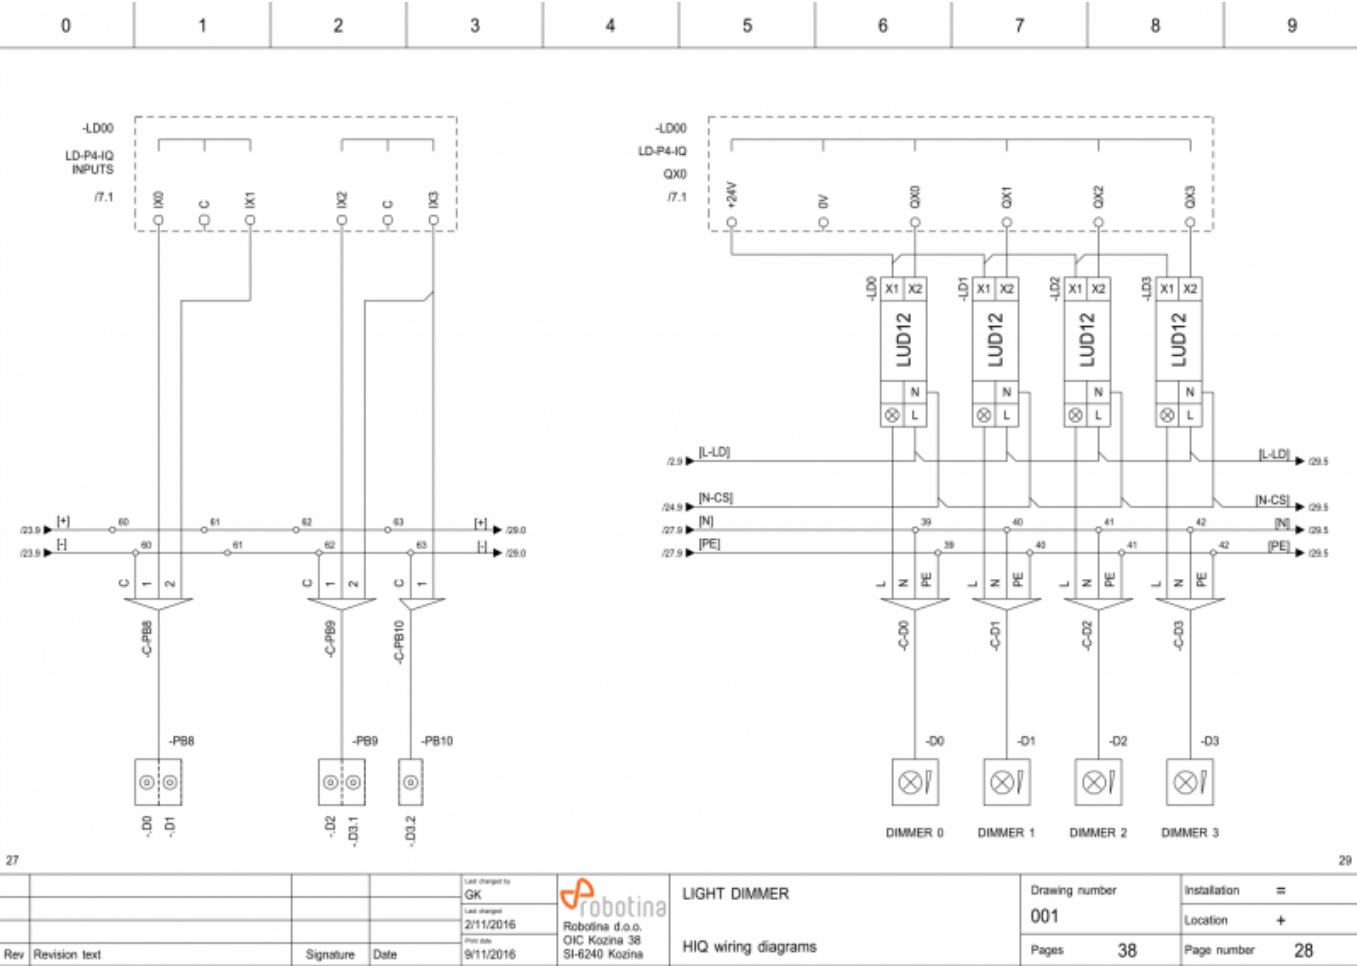

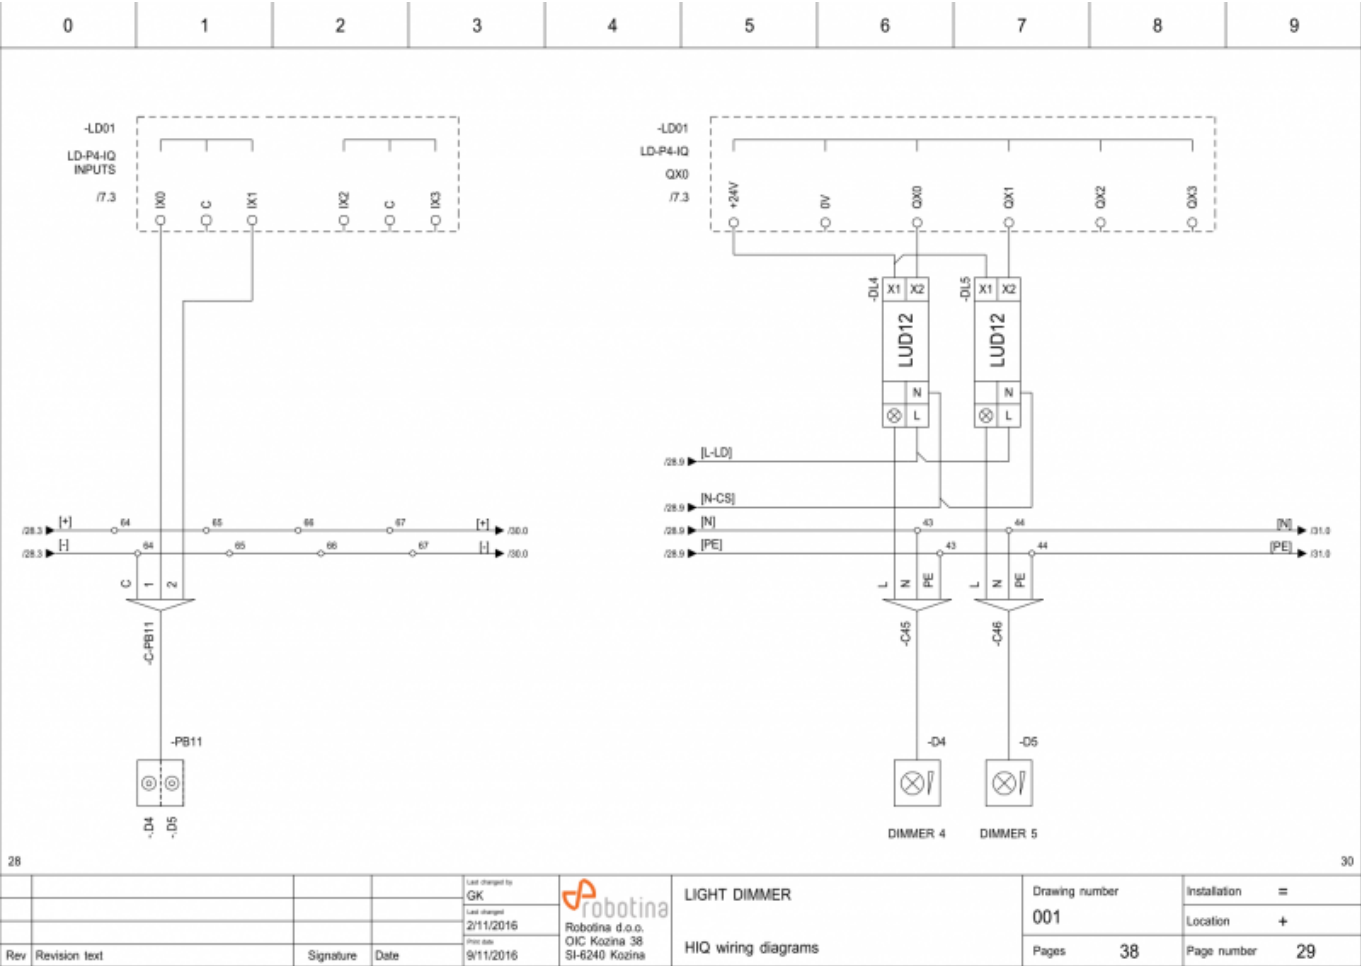


Page 30-33 - Blinds controllers


On our sample plan we have 2 Blinds controllers (BC) with 9 blinds and 9 double-push buttons.

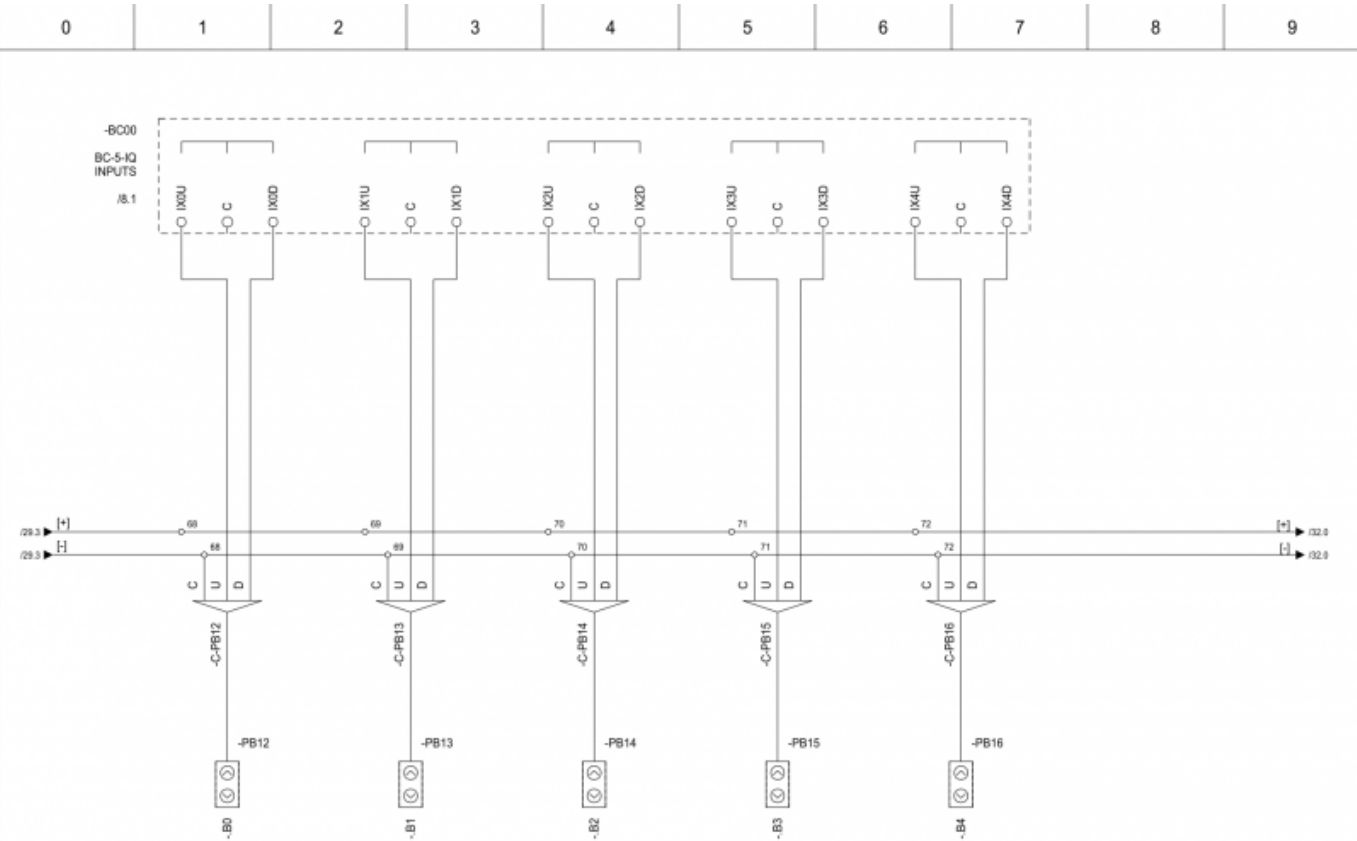


20												31	
					Last changed by GK	 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	BLINDS CONTROLLER		Drawing number	Installation =			
					Last changed 20/10/2016		HIQ wiring diagrams		001	Location +			
					Print date 9/11/2016				Pages 38	Page number 30			
Rev	Revision text		Signature	Date									

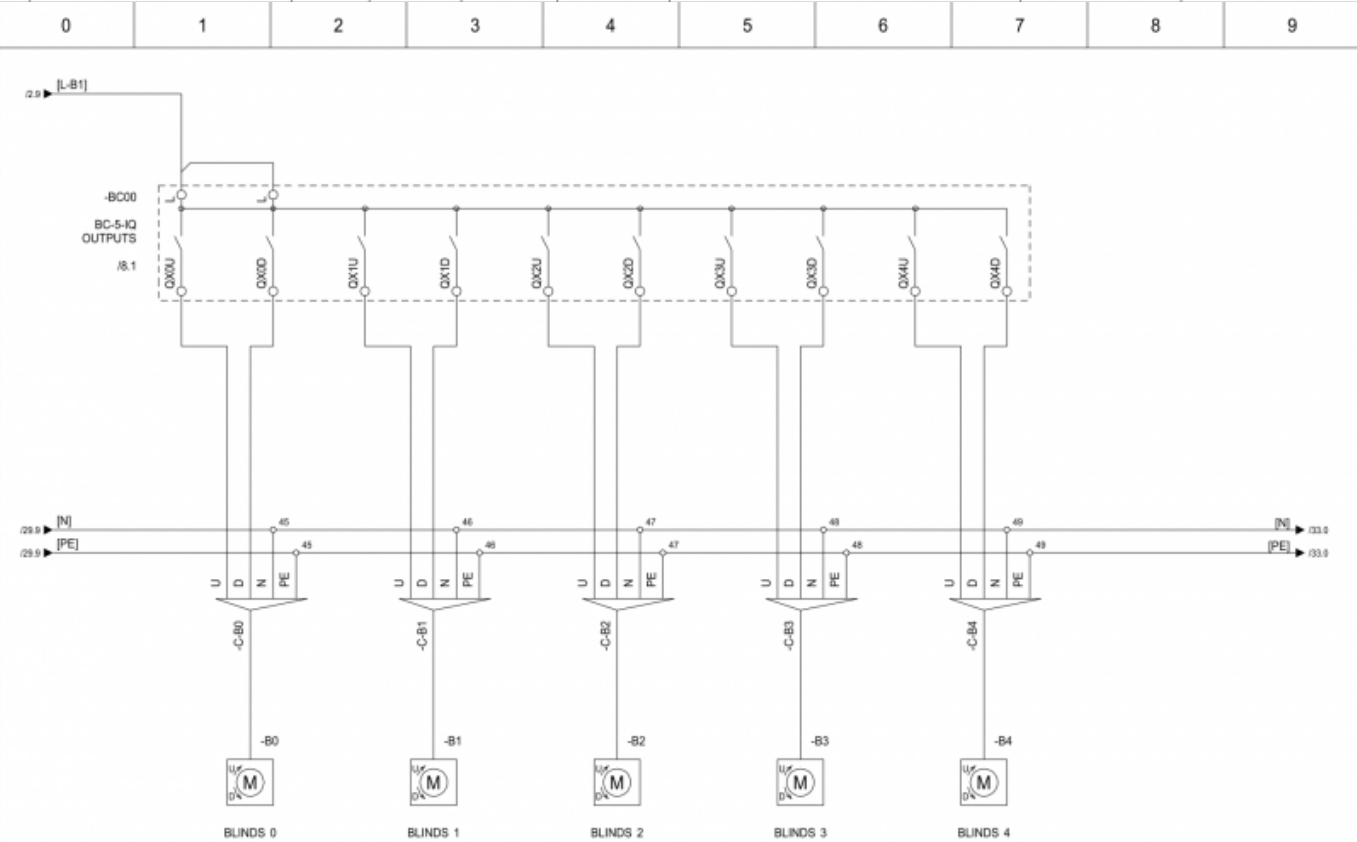

			Last changed by GK		 Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	BLINDS CONTROLLER		Drawing number	Installation	=
			Last changed 2/11/2016			HIQ wiring diagrams		001	Location	+
Rev	Revision text	Signature	Date	9/11/2016				Pages	38	Page number

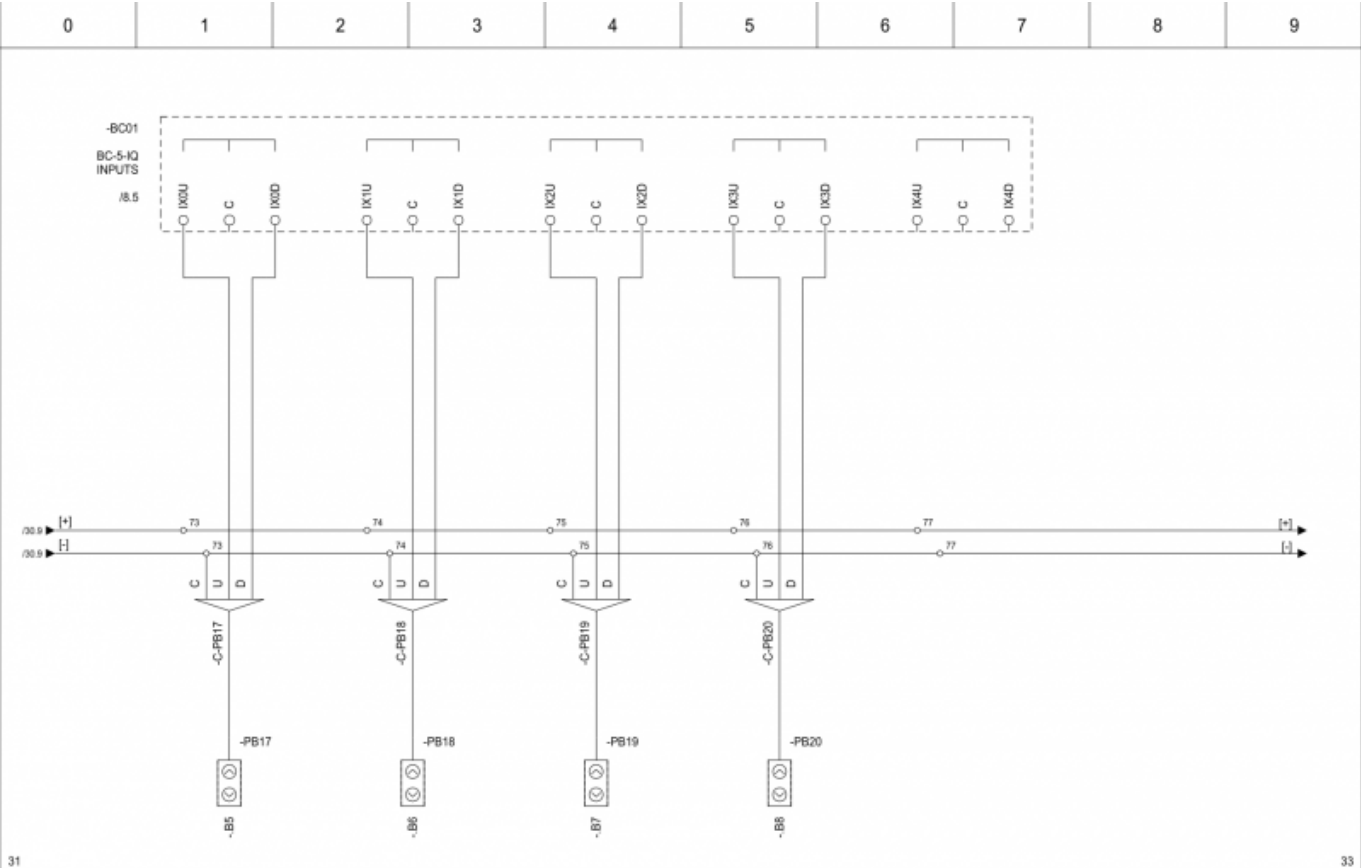


Rev	Revision text	Signature	Date	9/11/2016	Robotina Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	BLINDS CONTROLLER HIQ wiring diagrams	Drawing number 001	Installation =	
							Pages 38	Location +	
								Page number 32	

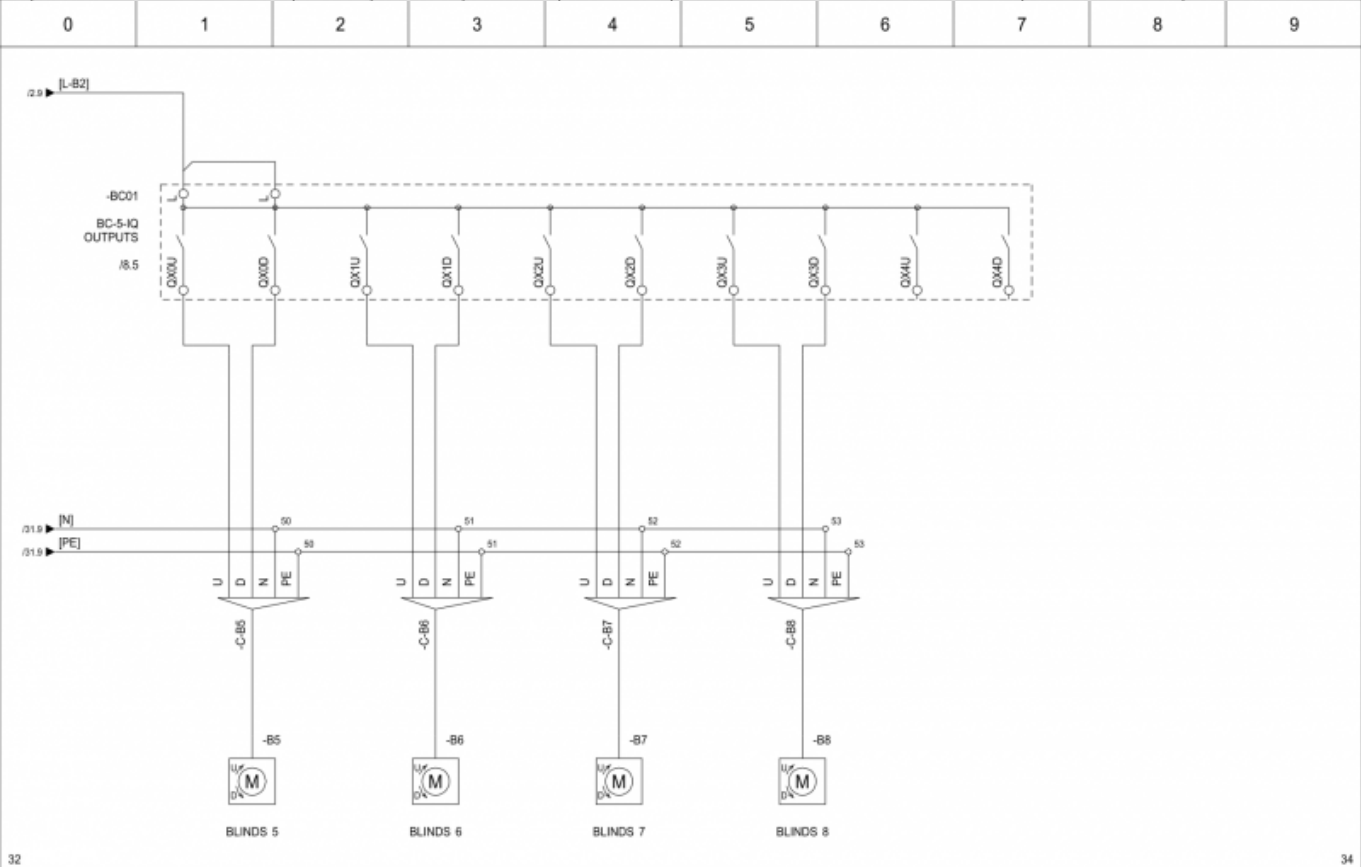


Rev	Revision text	Signature	Date	9/11/2016	Robotina Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina	BLINDS CONTROLLER HIQ wiring diagrams	Drawing number 001	Installation =	
							Pages 38	Location +	
								Page number 33	

Page 34-35 - LED stripe dimmer

On sample plan we use 2 LED stripe dimmers. RGBW (red-green-blue-white) LED stripe is connected on the first dimmer and the second dimmer controls 2 white LED stripes (2 outputs are empty). 2 push buttons are connected on the second dimmer.

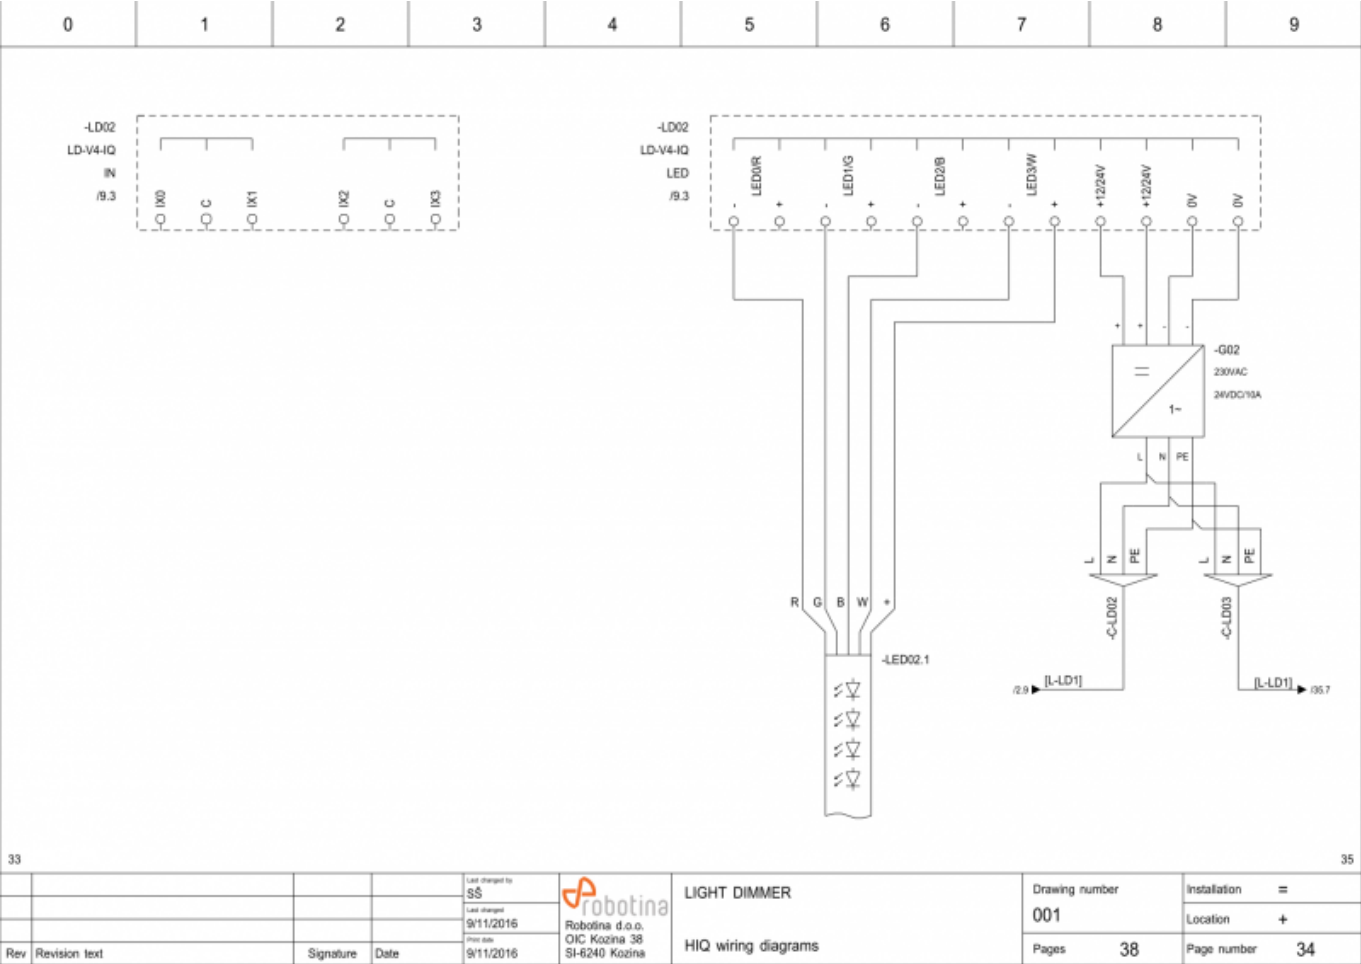


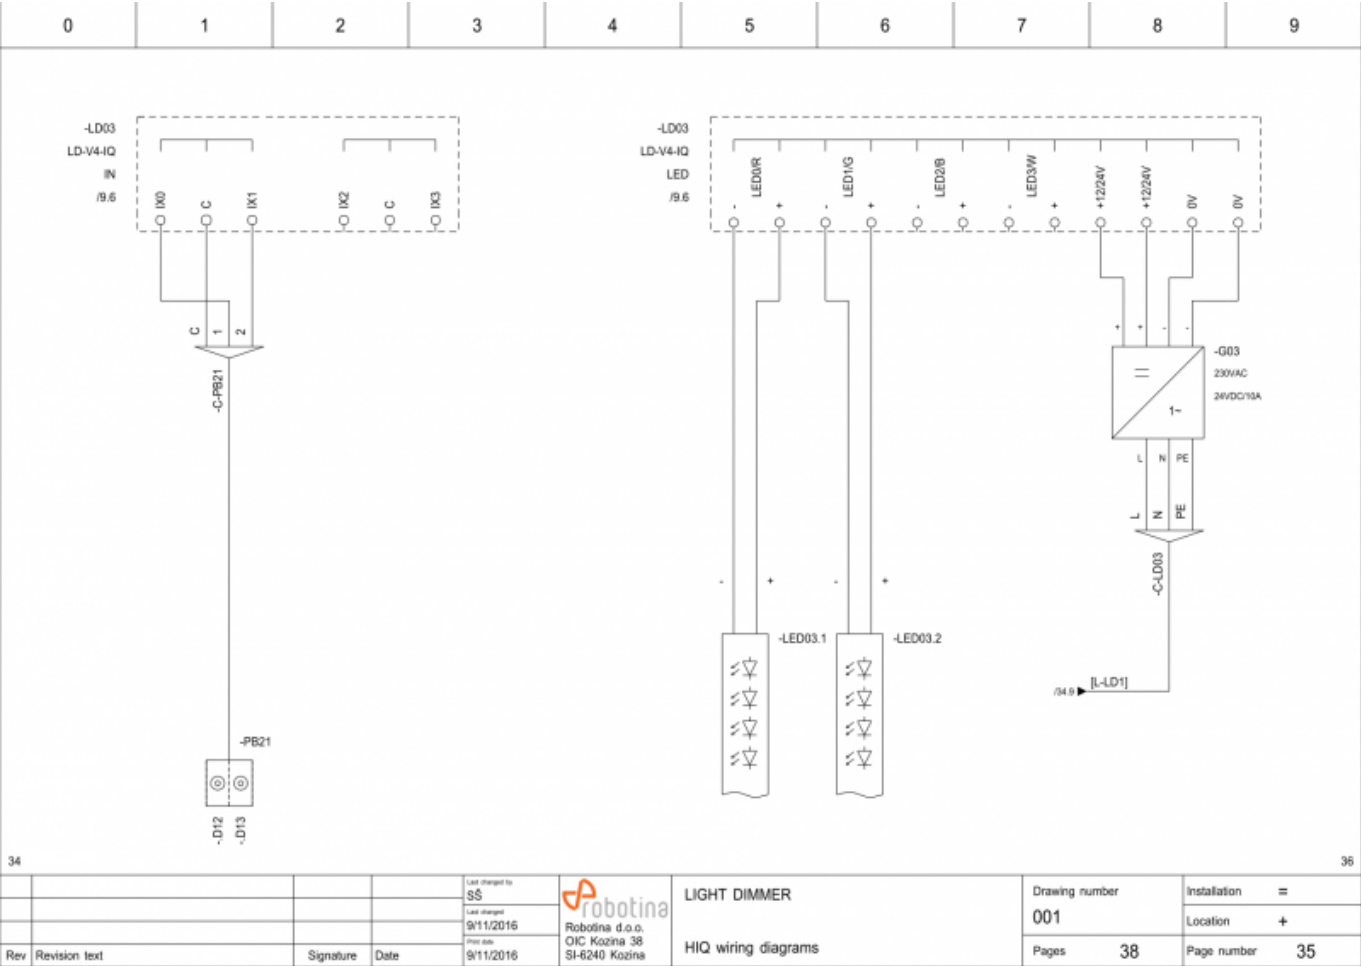

Page 36-38 - Fan-coil

Fan-coil connection.

8738

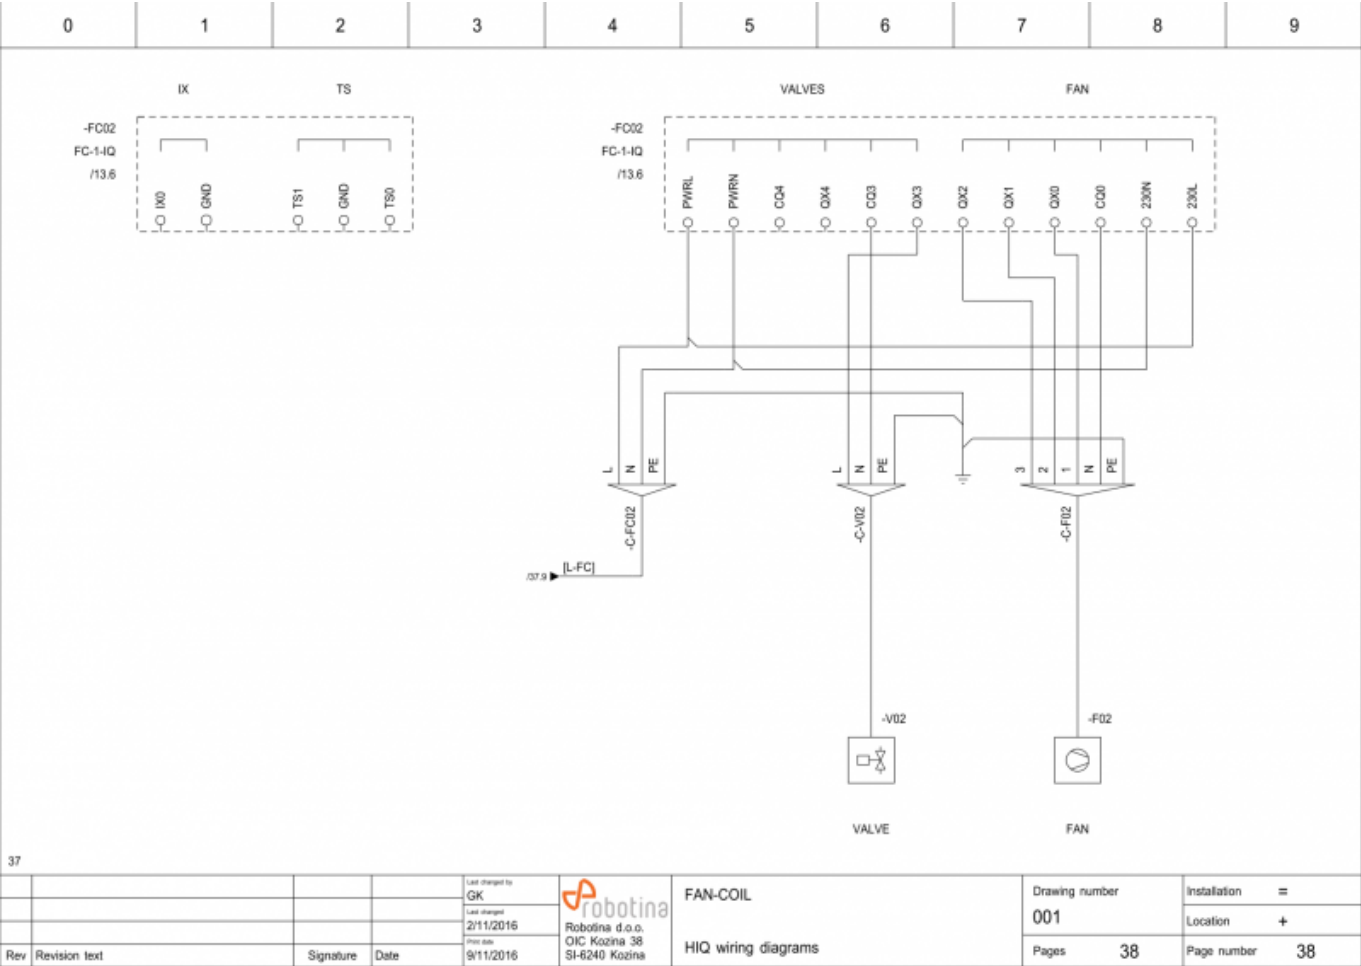

From:
<http://wiki.hiq-home.com/> -

Permanent link:
http://wiki.hiq-home.com/doku.php?id=en:hiq_home:methods:design&rev=1538745083

Last update: **2018/10/05 13:11**

