


HIQ designing

Presented electric wiring plans were made with the help of [Elwin](#) software which is made by [3xM Automation company](#). New plans can be made with modification of included [Elwin project](#) or with modification of [DXF plans](#) with any DXF capable program. With the Elwin project, all HIQ symbols are included. The whole design plan can be also downloaded as a [PDF file](#).

Page 1- Power distribution-RCD switch and power meter

Single phase power input, connection of RCD switch (Residual Current Device) and [power meter](#). Input can be single or three phase.


The [power meter](#) on the wiring plan is connected to measure the whole electricity consumption, but can be connected to any device (or group of devices). Only single phase electricity measurement is available.

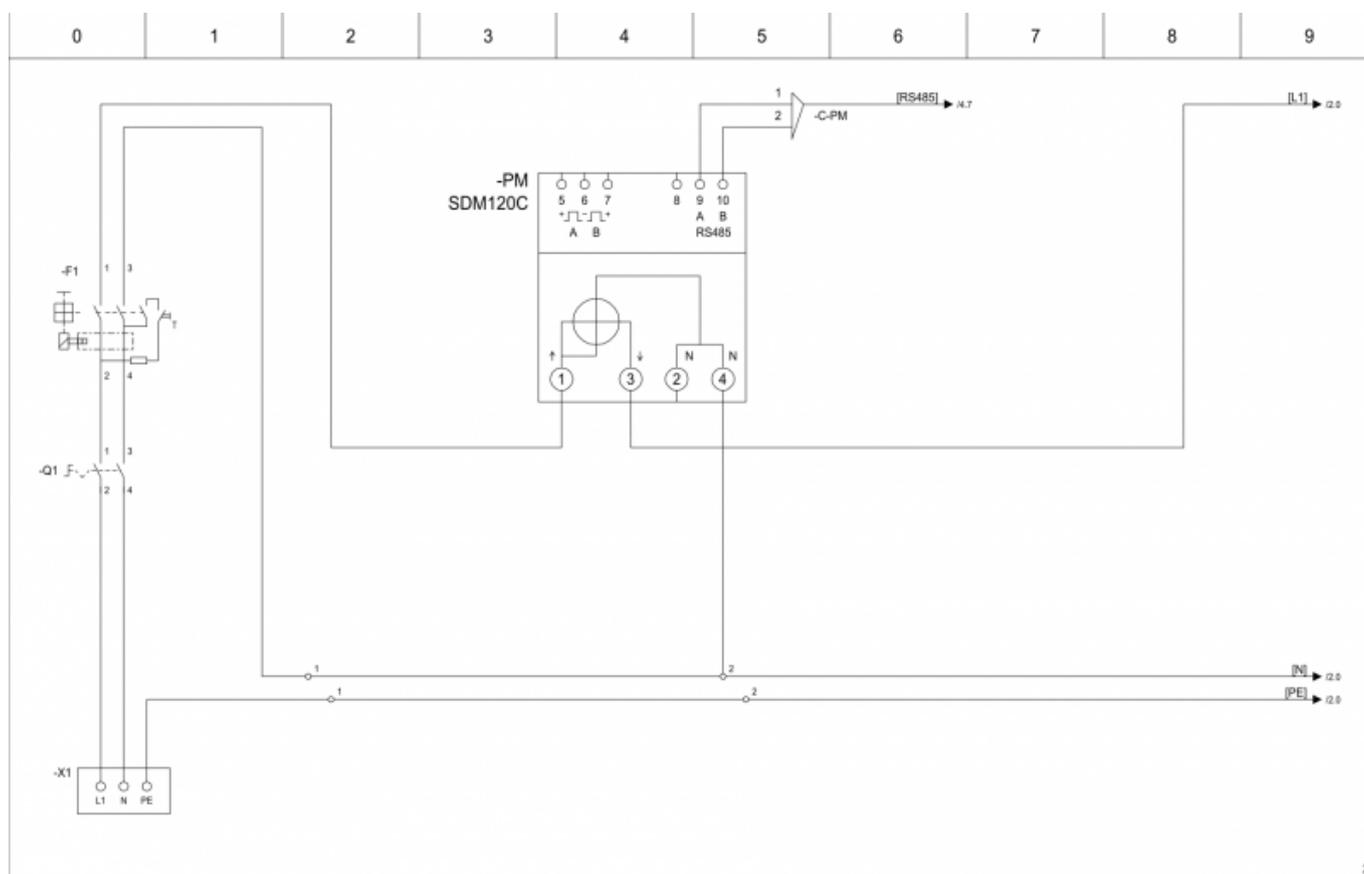


| | | | | | | | |
|--|--|--|---|--|---|--|---|
| | | | Last changed by SS Last changed 8/11/2016 Print date 9/11/2016 | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | POWER DISTRIBUTION HIQ wiring diagrams | Drawing number 001 Pages 38 | Installation = Location + Page number 1 |
|--|--|--|---|--|---|--|---|

Page 2-3 - Power distribution - Fuses

Suggested fuse plan.

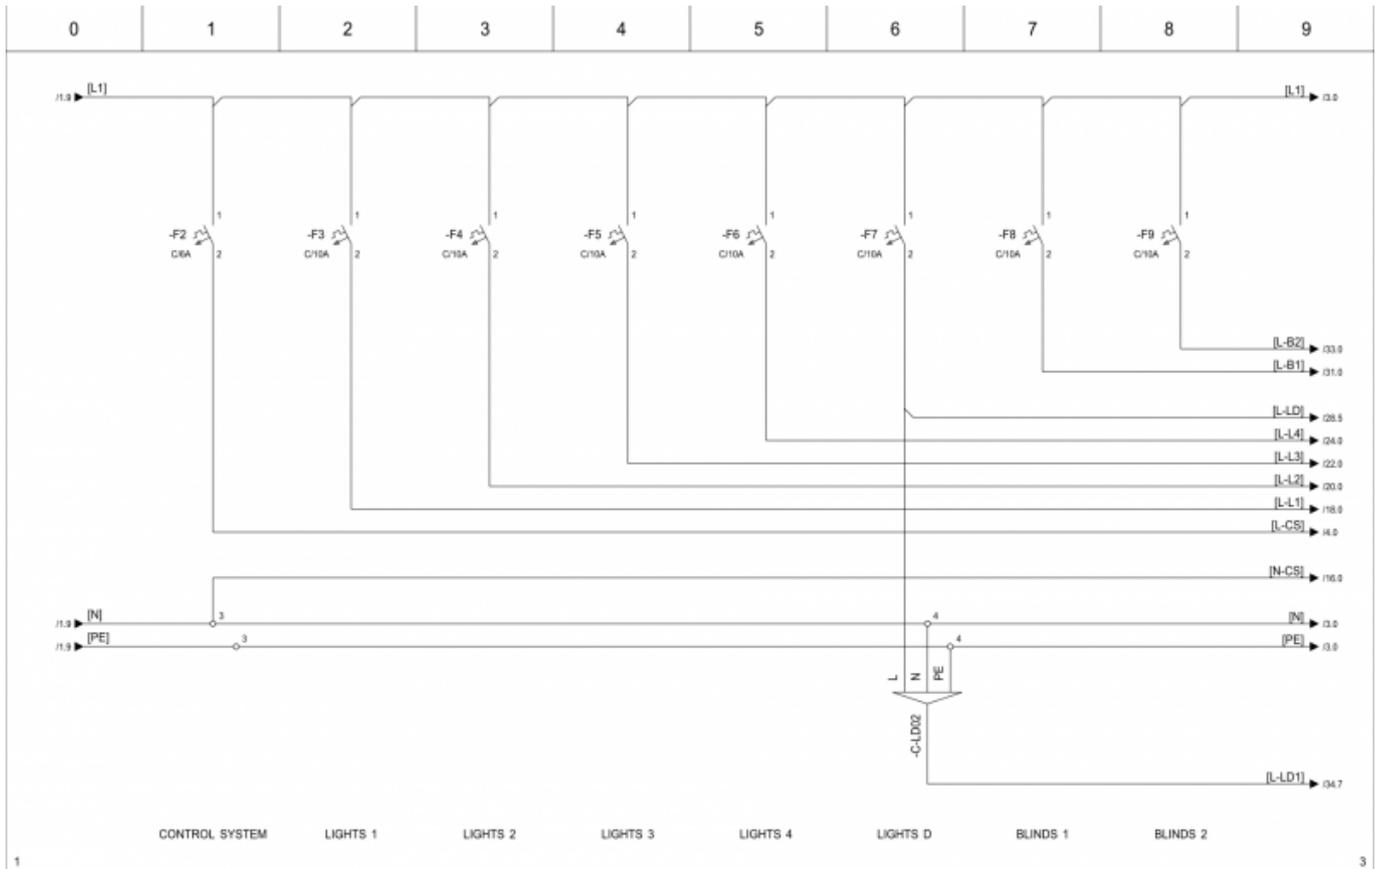

| | | | | | | | |
|---------|-------------------|---------------|---|--|---|-----------------------|----------------|
| | | | Last changed by SS Last changed 7/11/2016 Print date 9/11/2016 | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | POWER DISTRIBUTION HIQ wiring diagrams | Drawing number 001 | Installation = |
| Rev | Revision text | Signature | Date | | | Pages 38 | Location + |

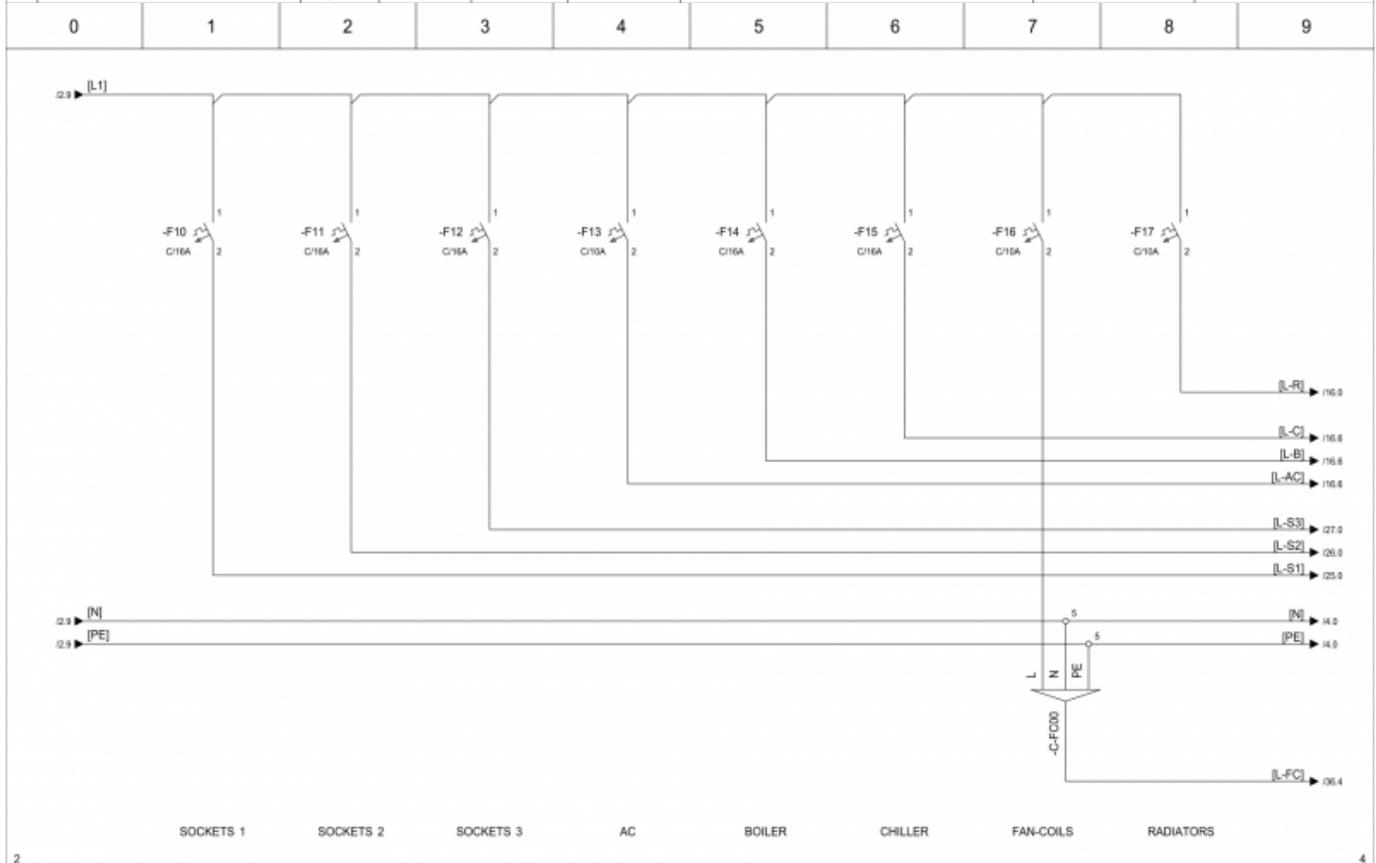

| | | | | | | | |
|---------|-------------------|---------------|---|--|---|-----------------------|----------------|
| | | | Last changed by GK Last changed 2/11/2016 Print date 9/11/2016 | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | POWER DISTRIBUTION HIQ wiring diagrams | Drawing number 001 | Installation = |
| Rev | Revision text | Signature | Date | | | Pages 38 | Location + |


Page 4 - Control System-Power supply, HC, CAD-232

24V power supply (PS) for control system, Home controller and CAD-232-A2-IQ.

24V power supply can be optionally used for LED lighting (up to 2.5A with serial power supply, larger power supply can be used).


Home controller (HC) is the heart of the system. It is connected to the network (ETH) and has optional inputs (connections are on page 15) and outputs (connections are on page 16).

CAD-232-A2-IQ expander is used as communication interface between home controller and power meter (If power meter is not used then the expander is not necessary). It is connected to a home controller through IEX bus, to COM2 on home controller input and to power meter (RS485 communication).

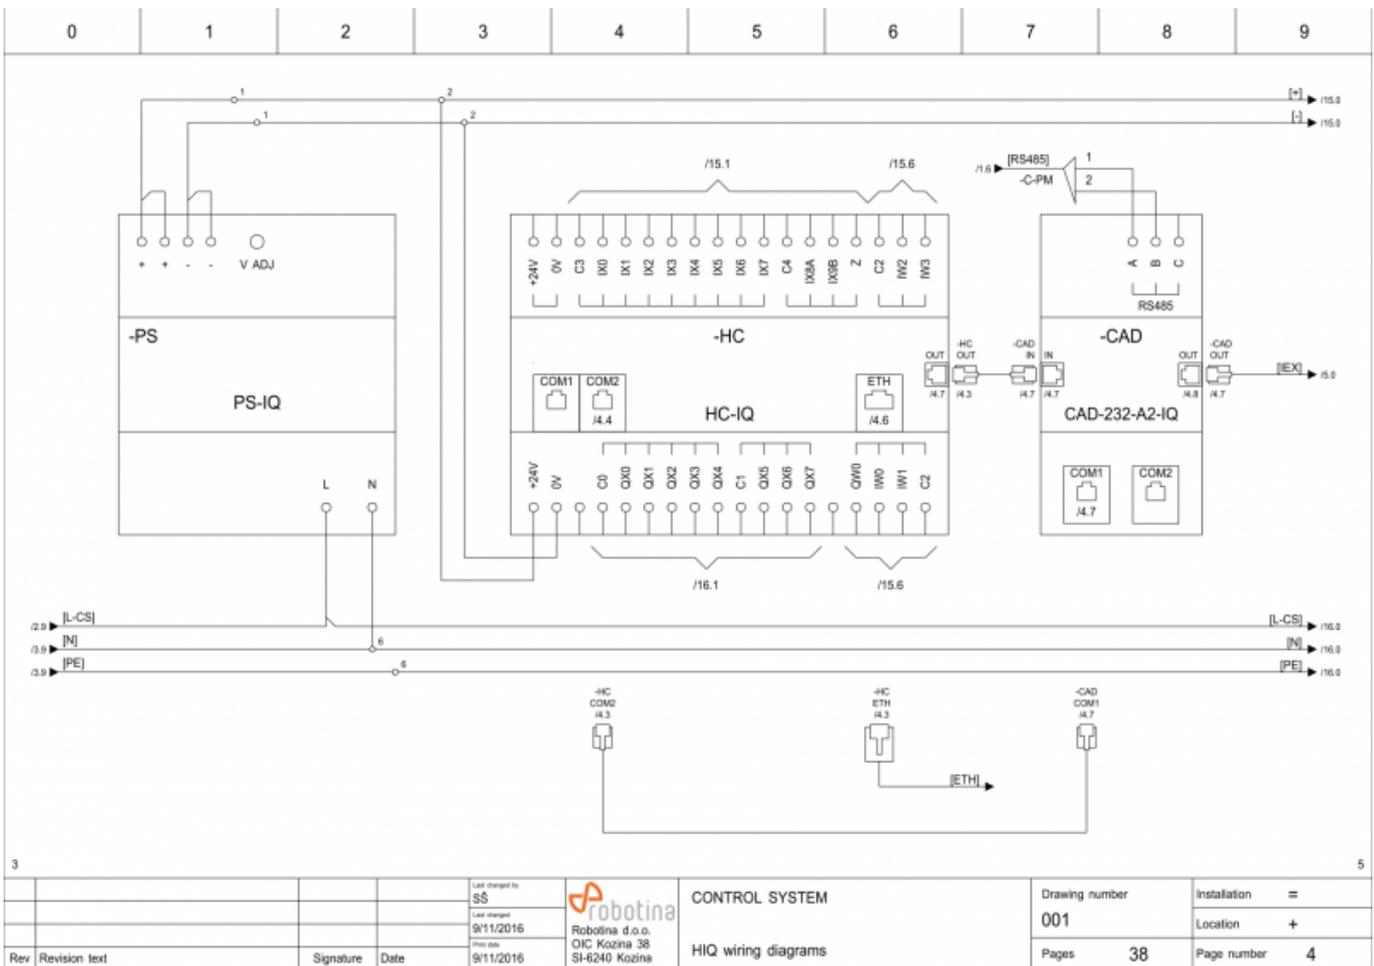


Page 5-6 - CS-Light controller 00 and 01

Light controllers (LC) are connected to IEX bus, we can connect up to up 4 LC to 1 home controller. On the top side are inputs and on the bottom side are outputs (connections are on page 17-24).

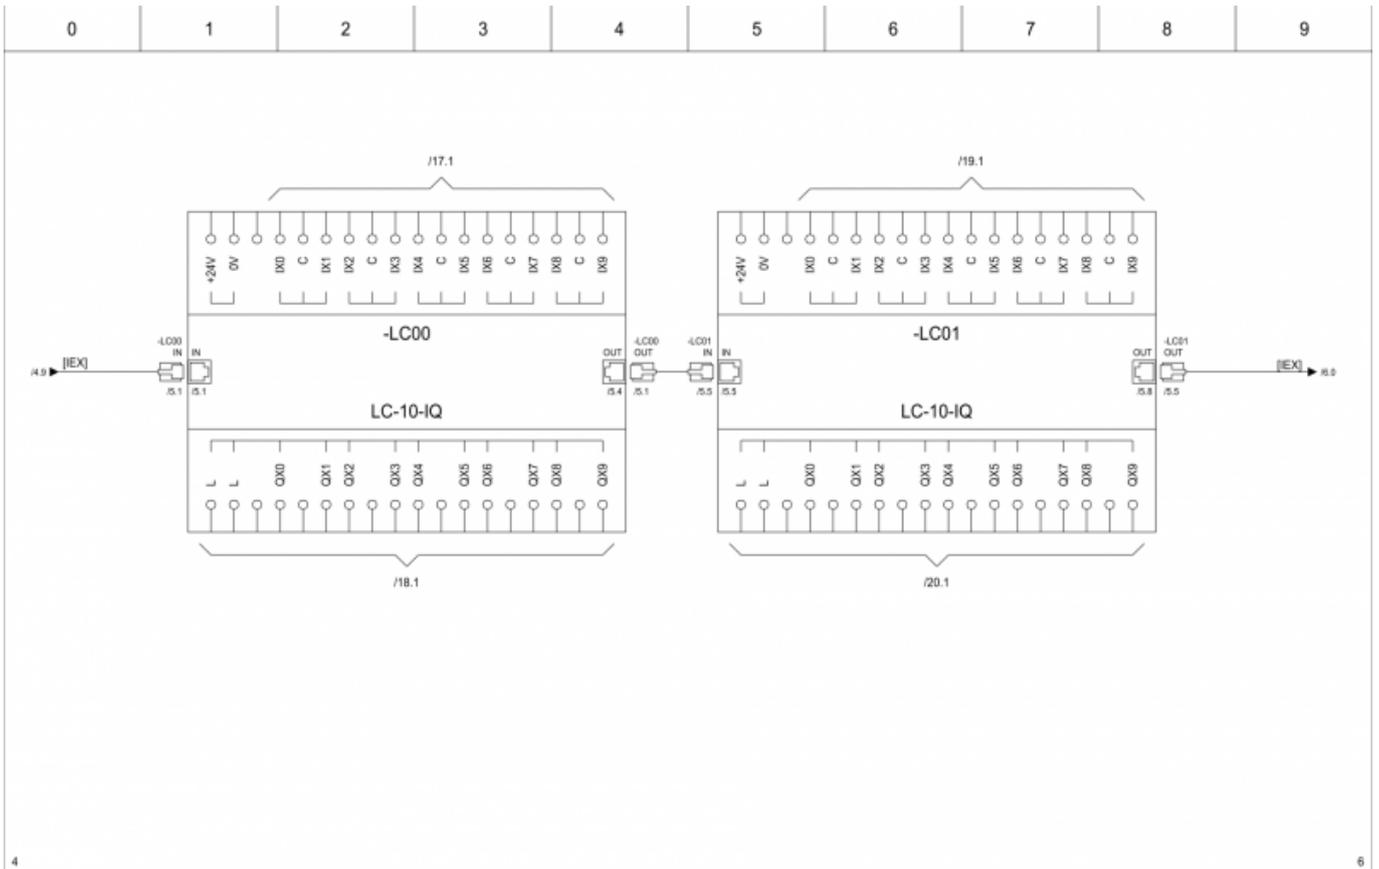


| | | | | | | | | | | | |
|-----|---------------|-----------|---|--|--|---|--|---|--|--|--|
| | | | Last changed by GK Last changed 20/10/2016 Print date 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | CONTROL SYSTEM HIQ wiring diagrams | | Drawing number 001 Pages 38 | | Installation = Location + Page number 5 | |
| Rev | Revision text | Signature | Date | | | | | | | | |

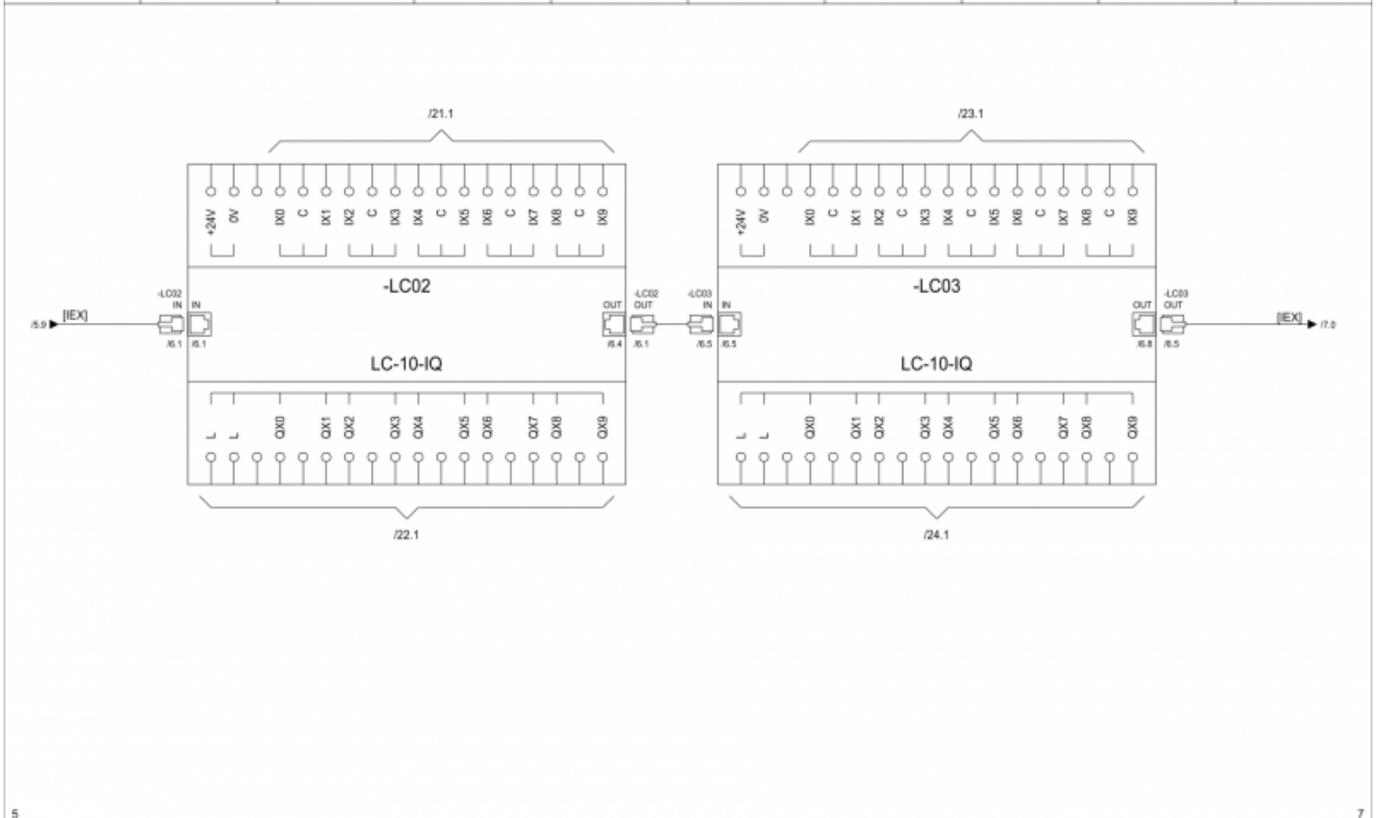

| | | | | | | | | | | | |
|-----|---------------|-----------|---|--|--|---|--|---|--|--|--|
| | | | Last changed by GK Last changed 20/10/2016 Print date 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | CONTROL SYSTEM HIQ wiring diagrams | | Drawing number 001 Pages 38 | | Installation = Location + Page number 6 | |
| Rev | Revision text | Signature | Date | | | | | | | | |


Page 7 - CS - Light dimmer

Up to 4 light dimmers can be connected to 1 HC. On sample plan we use 2 [Light dimmers drivers](#) for LUD-12 universal light dimmers.

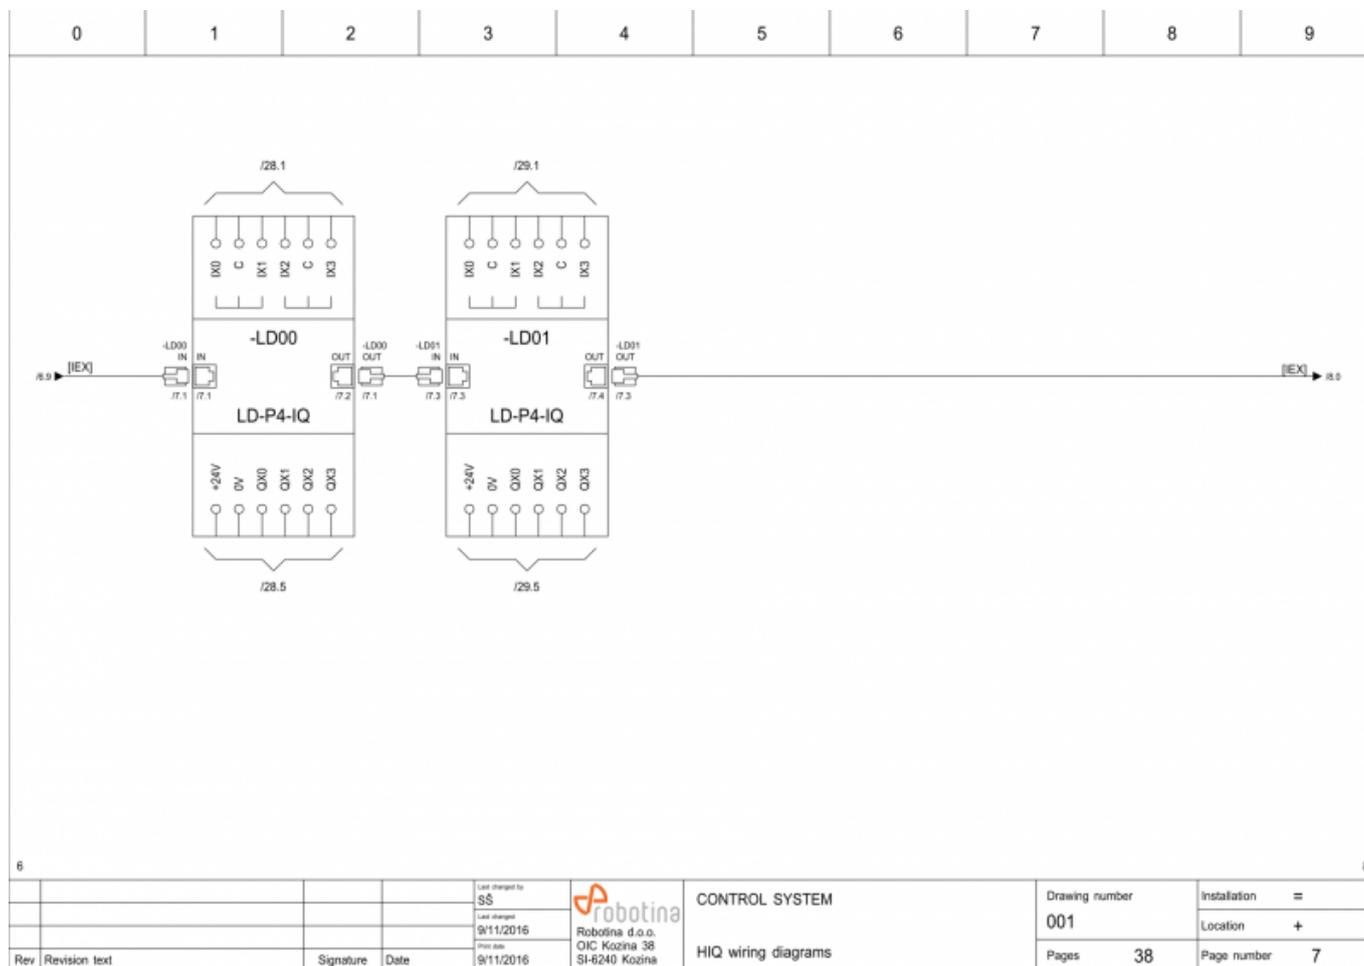

Page 8 - CS - Blinds controllers


Up to 2 [Blinds controllers \(BC\)](#) can be connected to 1 HC.

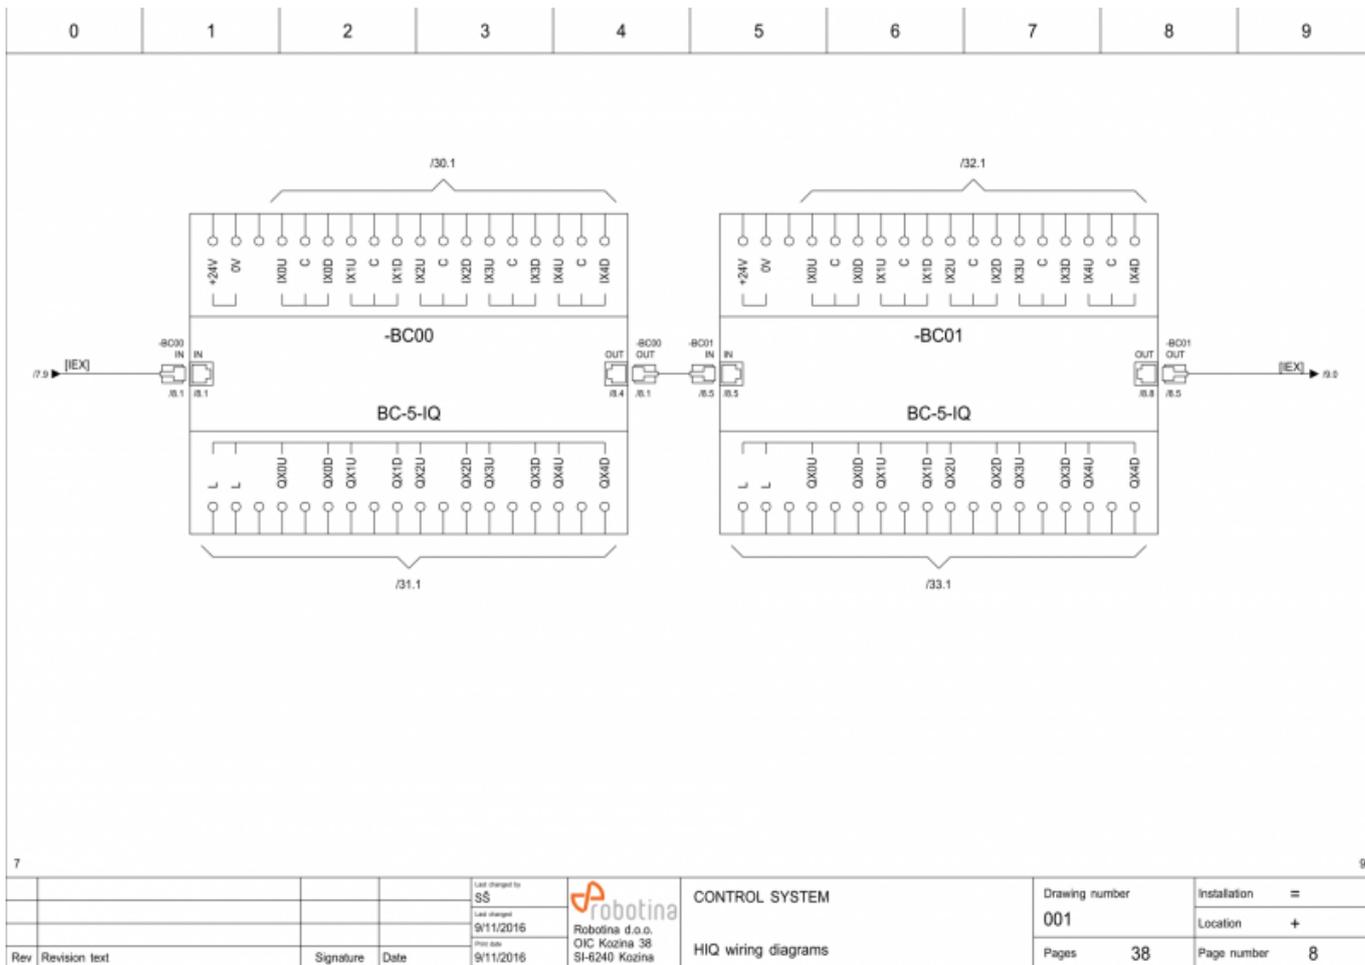

Page 9 - CS - bus extender, LED light dimmer

Bus extender (BE) is a passive switch for easy IEX bus interconnection between cabinet and field modules.


Up to 4 light dimmers can be connected to 1 HC. On sample plan we use 2 LED stripe dimmers.

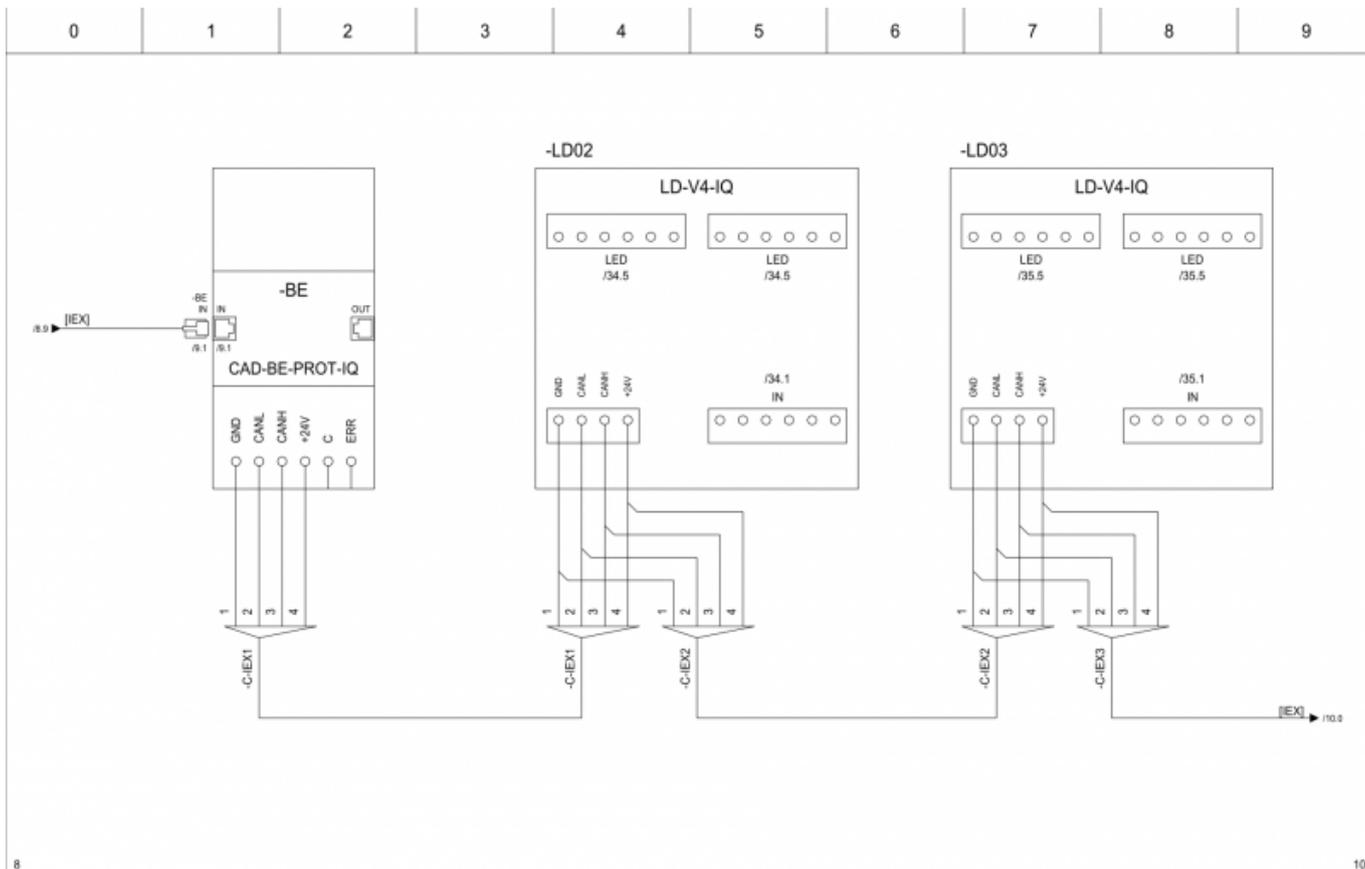

| | | | |
|-----|---------------|--|----------------|
| 8 | | 10 | |
| Rev | Revision text | Signature | Date |
| | | | 31/11/2016 |
| | | Last changed by: SS Last changed: 31/11/2016 Drawn by: | |
| | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | |
| | | CONTROL SYSTEM | |
| | | HIQ wiring diagrams | |
| | | Drawing number | Installation = |
| | | 001 | Location + |
| | | Pages 38 | Page number 9 |

Page 10 - CS - Scene controllers

Up to 4 Scene Controllers can be connected to 1 HC. On sample plan are 4 Scene Touch Panels, but also Scene Panels and Scene controllers can be connected in the same way.

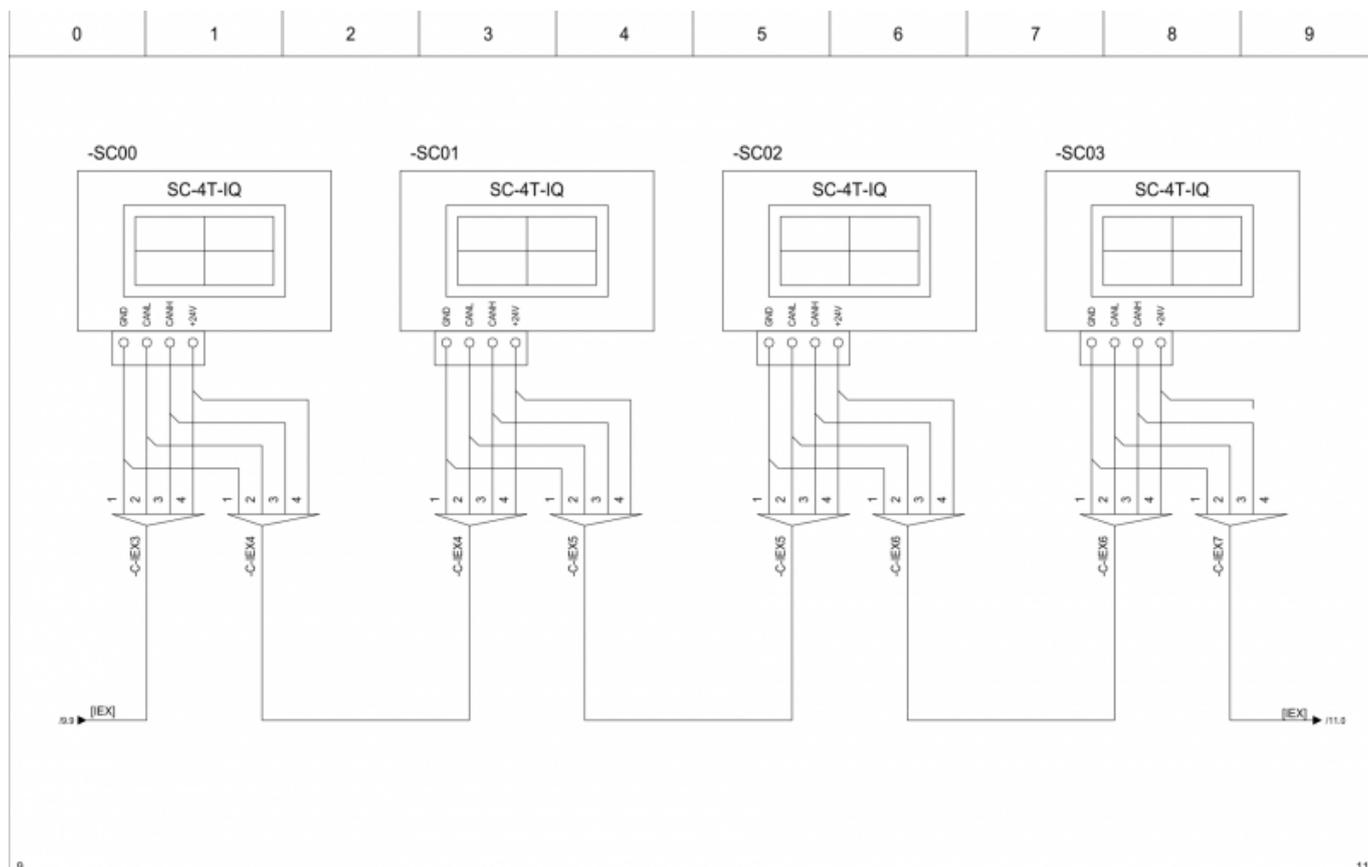


| | | | | | | | |
|-----|---------------|-----------|---|---|---|---------------------------------------|--|
| | | | Last changed by SS Last changed 8/11/2016 Print date 9/11/2016 |  Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | CONTROL SYSTEM HIQ wiring diagrams | Drawing number 001 Pages 38 | Installation = Location + Page number 10 |
| Rev | Revision text | Signature | Date | | | | |


Page 11-12 - CS - Thermostats

Up to 5 Thermostats can be connected to 1 HC. On sample plan we use 5 [Touch buttons electronic thermostats](#), but also ordinary [Electronic thermostats](#) and [Blind electronic thermostats](#) can be connected in a similar way.

Optionally we can connect window switch on each thermostat (sample on -TH02 and -TH03) (not possible with [Blind electronic thermostat](#)).

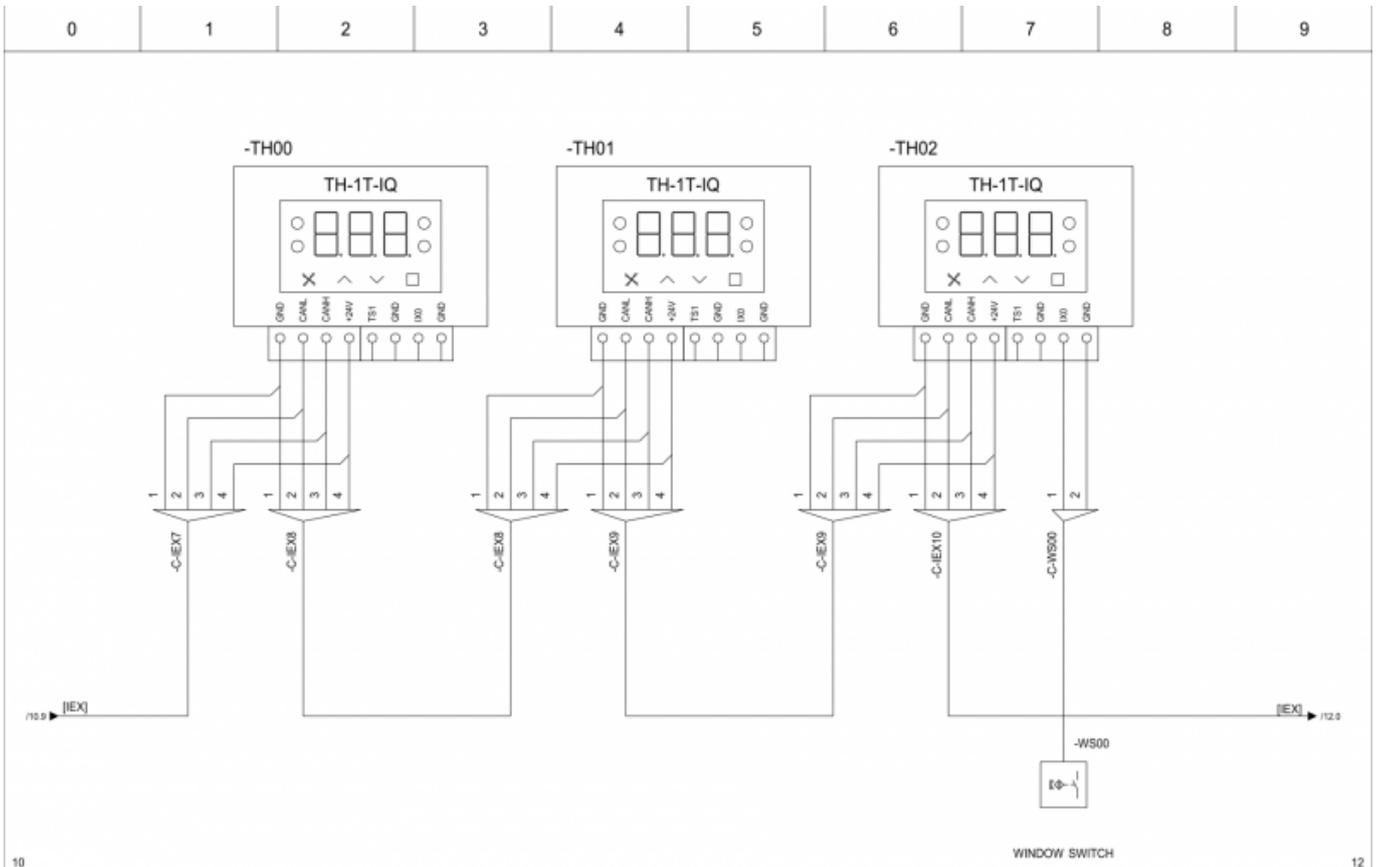

| | | | | | | | |
|-----|---------------|-----------|---|--|----------------|-----------------------|------------------------------|
| | | | Last changed by SS Last changed 8/11/2016 Drawn by 8/11/2016 | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | CONTROL SYSTEM | Drawing number 001 | Installation = Location + |
| Rev | Revision text | Signature | Date | | 8/11/2016 | HIQ wiring diagrams | Pages 38 |

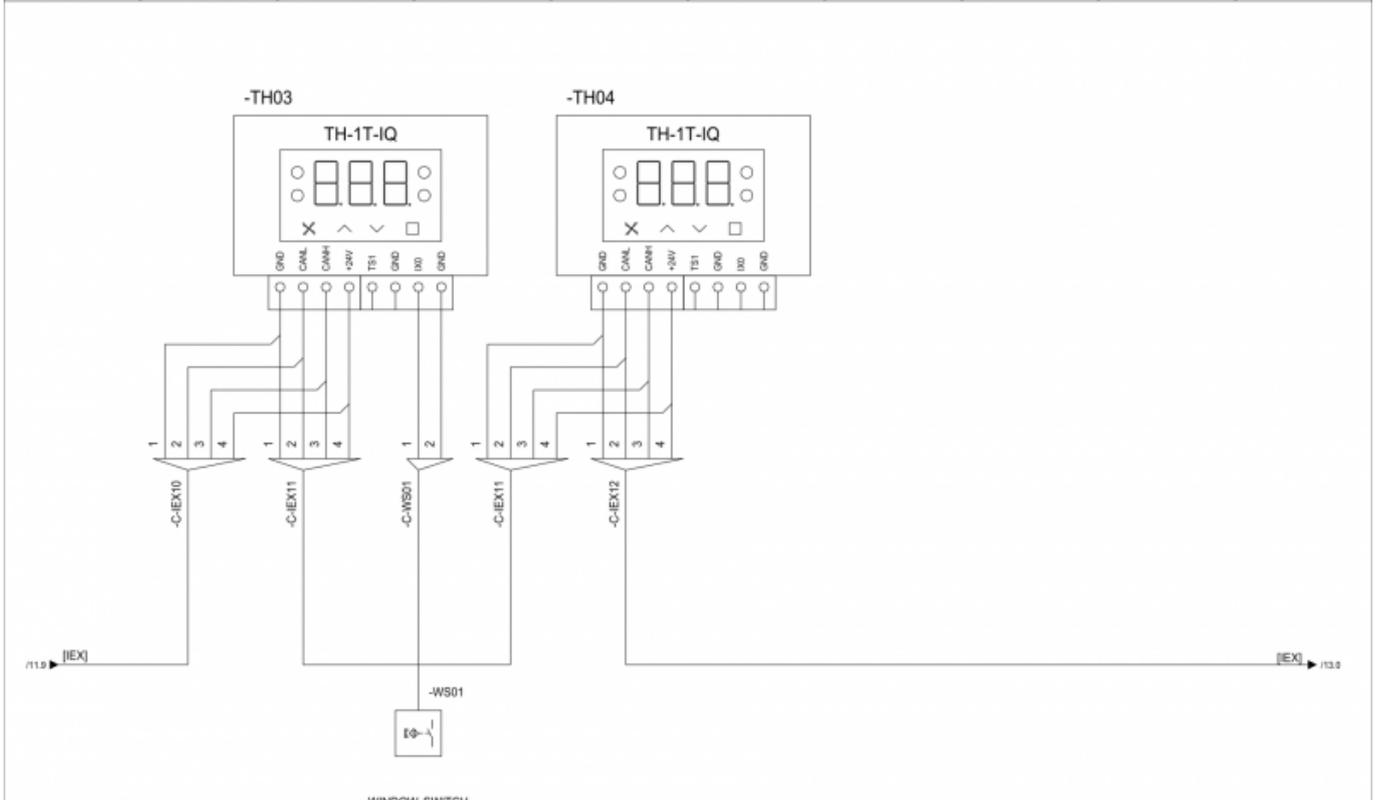


| | | | | | | | |
|-----|---------------|-----------|---|--|----------------|-----------------------|------------------------------|
| | | | Last changed by SS Last changed 8/11/2016 Drawn by 8/11/2016 | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | CONTROL SYSTEM | Drawing number 001 | Installation = Location + |
| Rev | Revision text | Signature | Date | | 8/11/2016 | HIQ wiring diagrams | Pages 38 |

| | | | | | | | | | |
|--|---|---|---|---|---|---|---|---|---|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| <p>SPARE PAGE - INTENTIONALLY LEFT BLANK</p> | | | | | | | | | |

| | | | | | | | | | | |
|--------------------|------------------------------|--------------------------|---------------------|--|--|---------------------|---|---|--|----|
| 13 | | | | | | | | | | 15 |
| | | | | <small>Last changed by</small> GK <small>Last changed</small> 19/8/2016 <small>Drawn by</small> S/11/2016 |  Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | CONTROL SYSTEM | <small>Drawing number</small> 001 <small>Pages</small> 38 | <small>Installation</small> = <small>Location</small> + <small>Page number</small> 14 | | |
| <small>Rev</small> | <small>Revision text</small> | <small>Signature</small> | <small>Date</small> | | | HIQ wiring diagrams | | | | |

Page 15 - Home controller inputs

If used, optional [lightness sensor](#) must be connected to IW0 analog input on [home controller](#). All other inputs are left for custom programming solutions (10 digital inputs IX0-IX7, IX8A, IX9B and 3 8-bit analog inputs IW1-IW3).

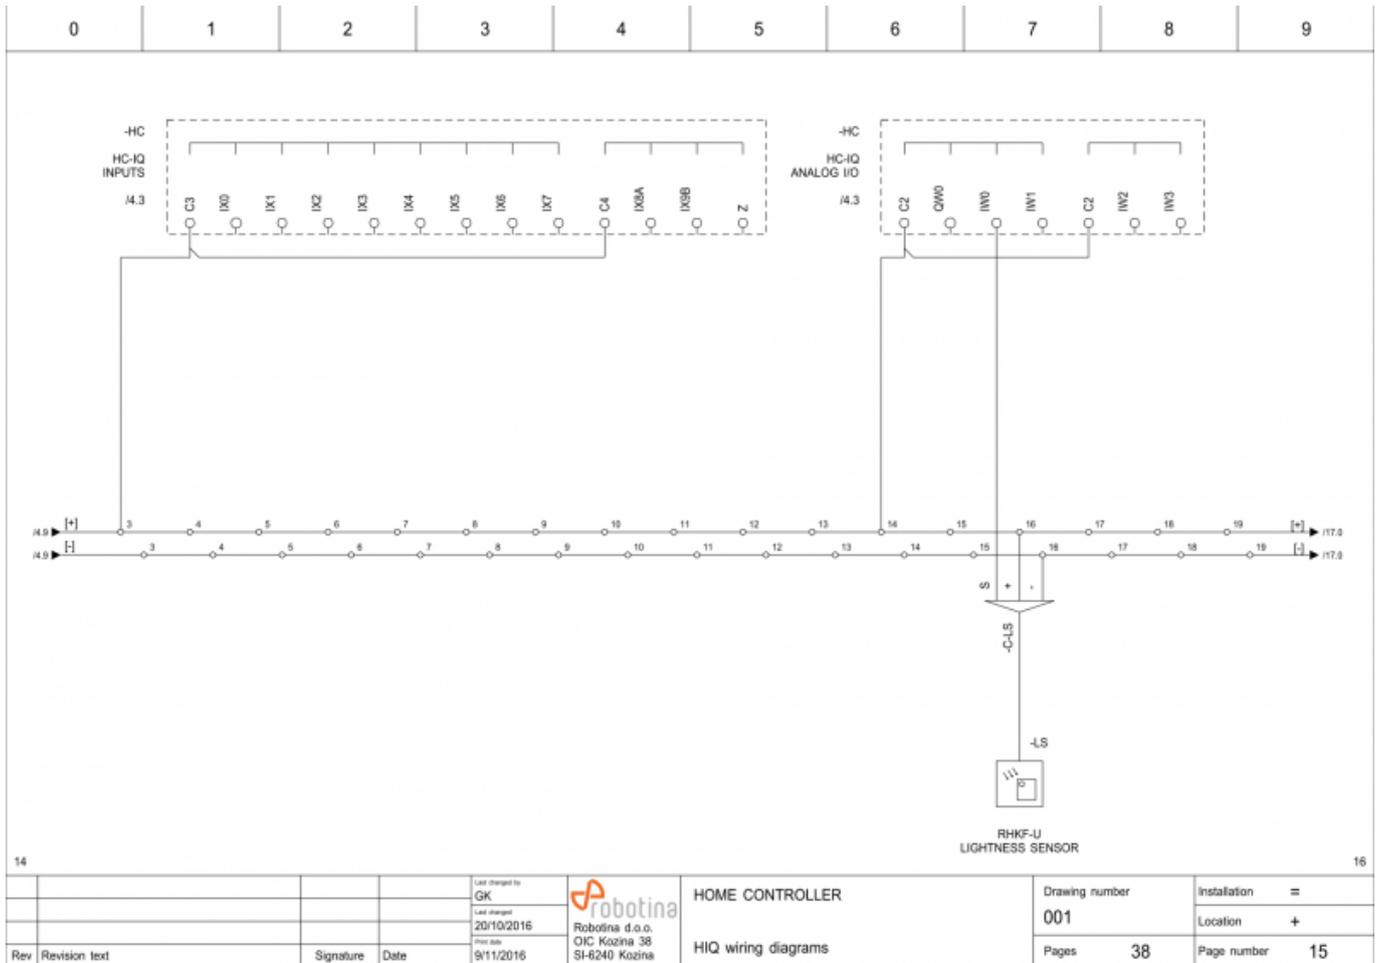

Page 16 - Home controller outputs

QX0-QX4 outputs - can be used for radiator valves or to control other heating/cooling devices. Internal relay is used for valves, other loads are recommended to use an additional 16A installation relay.


In our plan we use 2 radiator valves (and 3 [Fan-coil controllers](#)).

QX5 output - is used for Air Conditioner.


QX6 output - is used for Boiler.

QX7 output - is used for Chiller.


All three outputs are connected to external installation relays (-K.A, -K.B and -K.C) .

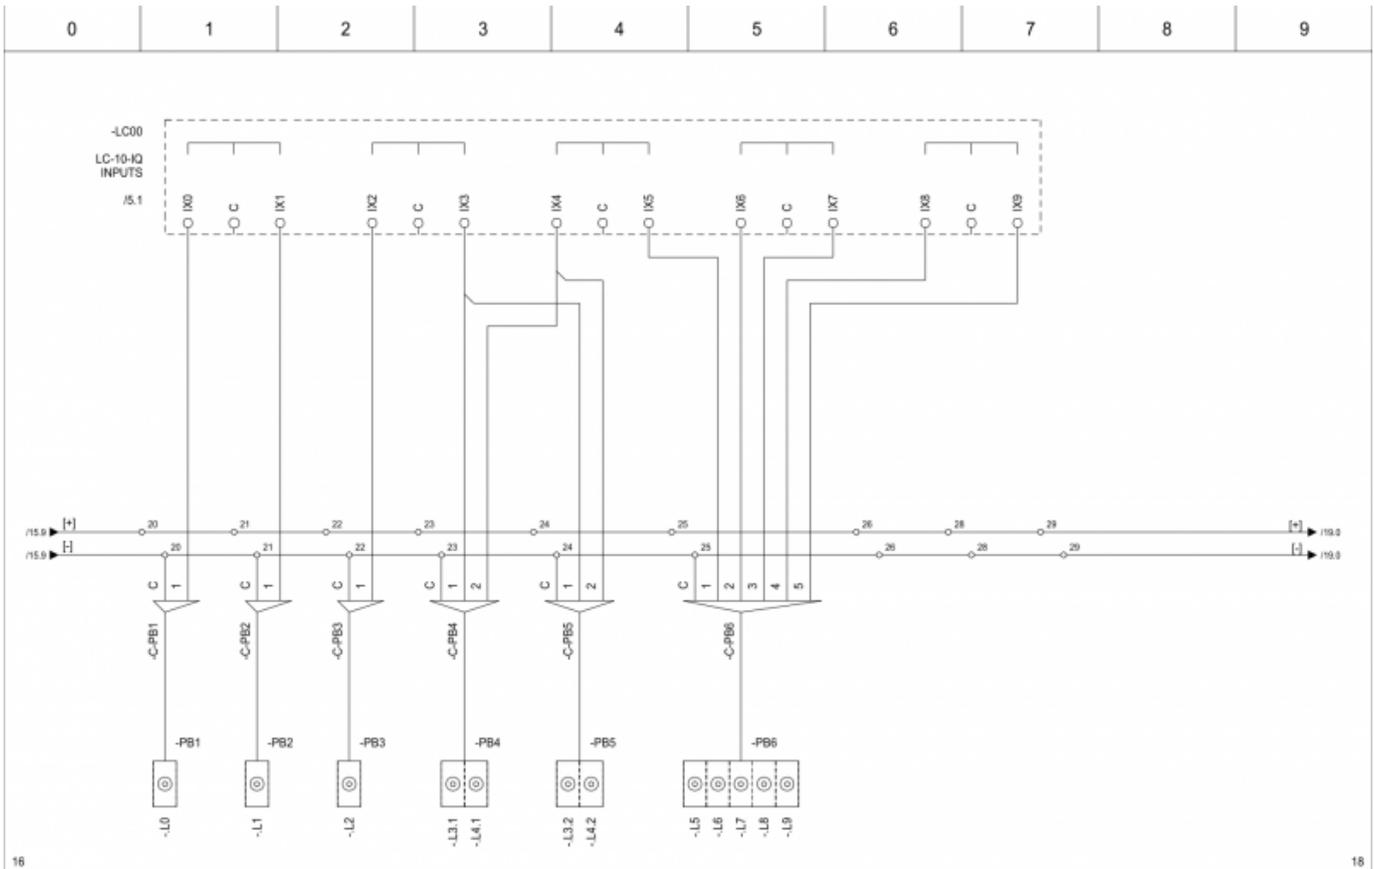


| | | | | | | | | | | | |
|-----|---------------|-----------|---|--|--|---|--|----------------------------------|--|---|--|
| | | | Last changed by: GK Last changed: 2010/2016 Print date: 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT CONTROLLER HIQ wiring diagrams | | Drawing number: 001 Pages: 38 | | Installation: = Location: + Page number: 17 | |
| Rev | Revision text | Signature | Date | | | | | | | | |

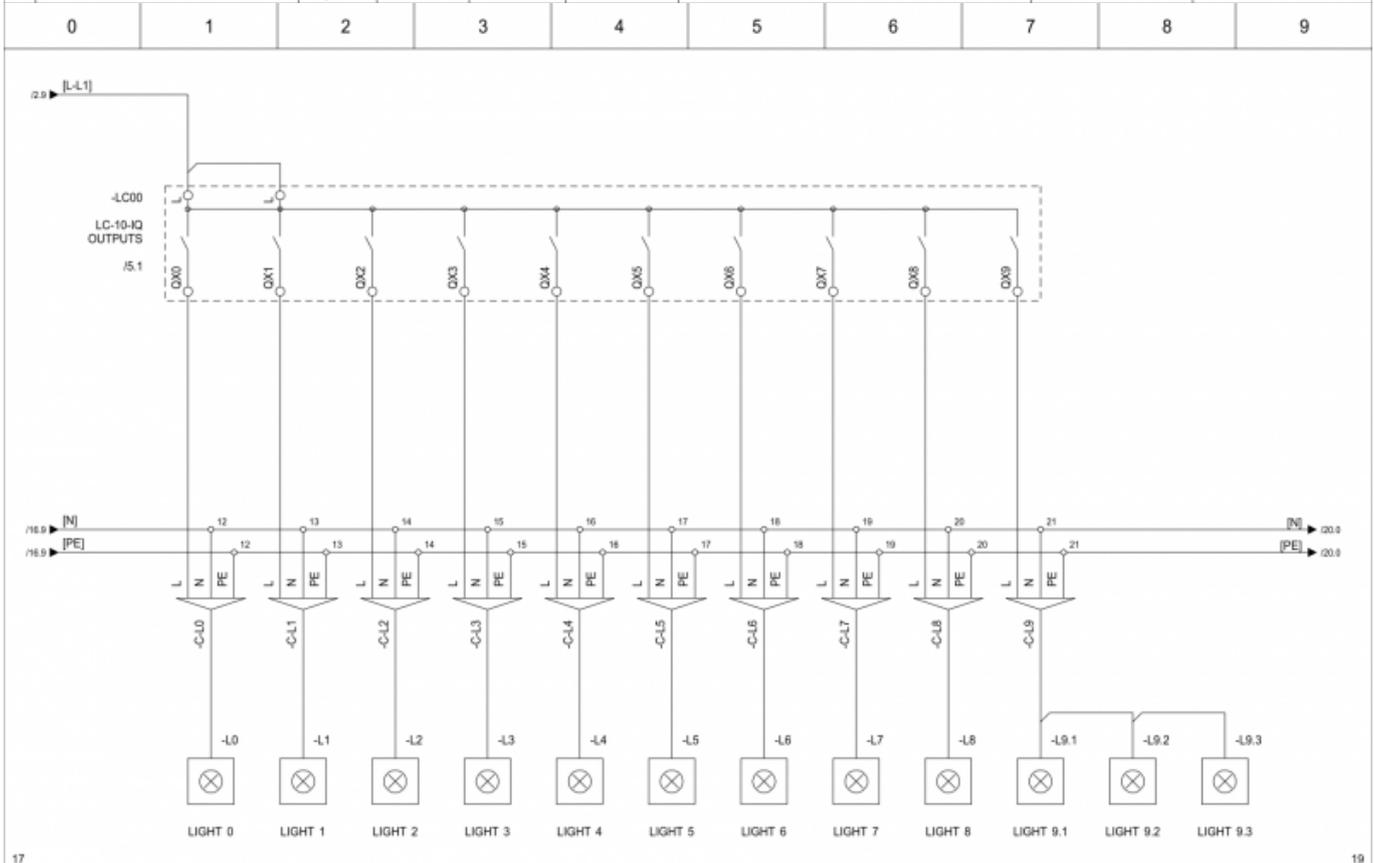


| | | | | | | | | | | | |
|-----|---------------|-----------|---|--|--|---|--|----------------------------------|--|---|--|
| | | | Last changed by: SS Last changed: 8/11/2016 Print date: 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT CONTROLLER HIQ wiring diagrams | | Drawing number: 001 Pages: 38 | | Installation: = Location: + Page number: 18 | |
| Rev | Revision text | Signature | Date | | | | | | | | |

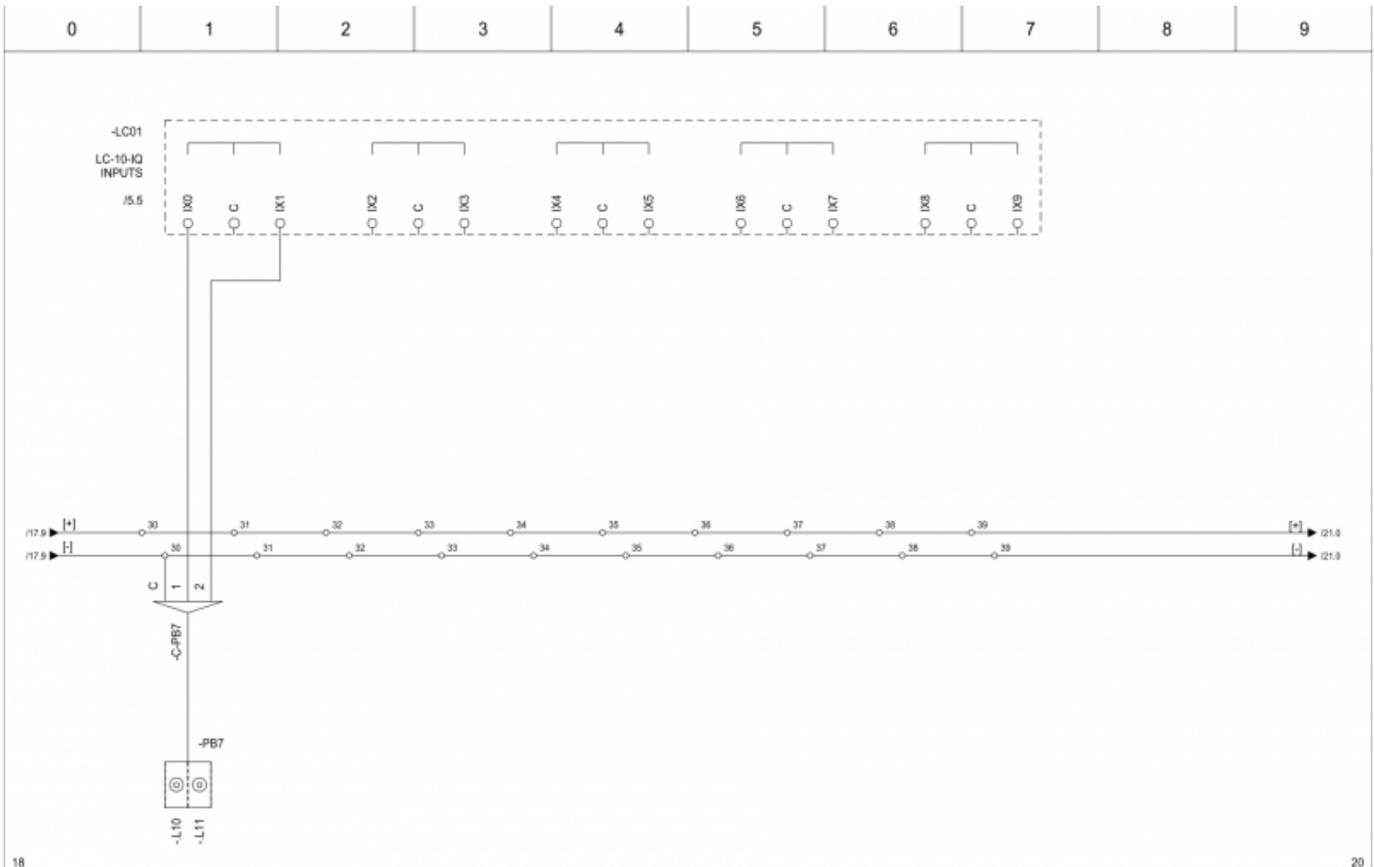


| | | | | | | | | | | | | |
|-----|---------------|-----------|---|--|--|---|--|--|---|--|---|--|
| | | | Last changed by GK Last changed 22/10/2016 Drawn by 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT CONTROLLER HIQ wiring diagrams | | | Drawing number 001 Pages 38 | | Installation = Location + Page number 19 | |
| Rev | Revision text | Signature | Date | | | | | | | | | |

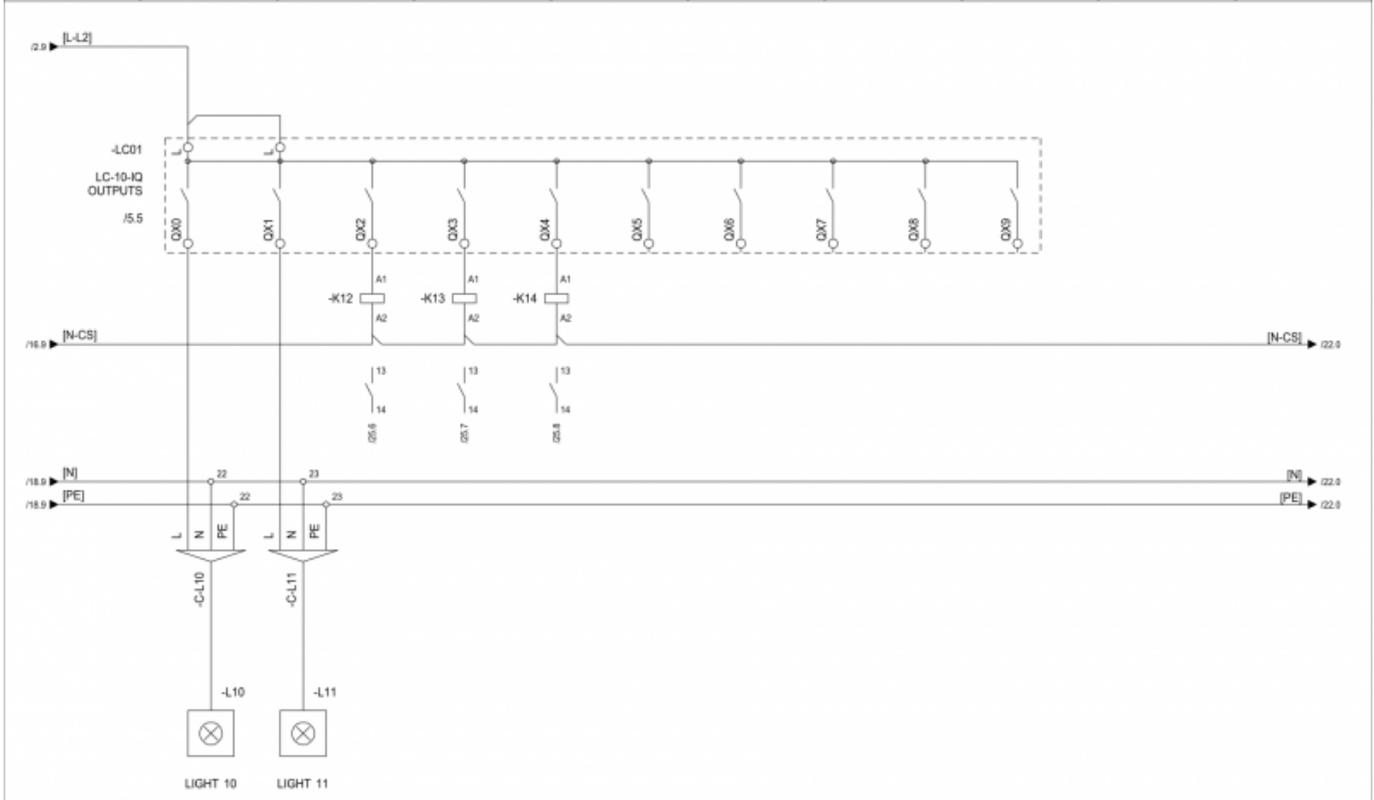


| | | | | | | | | | | | | |
|-----|---------------|-----------|--|--|--|---|--|--|---|--|---|--|
| | | | Last changed by SS Last changed 9/11/2016 Drawn by 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT CONTROLLER HIQ wiring diagrams | | | Drawing number 001 Pages 38 | | Installation = Location + Page number 20 | |
| Rev | Revision text | Signature | Date | | | | | | | | | |

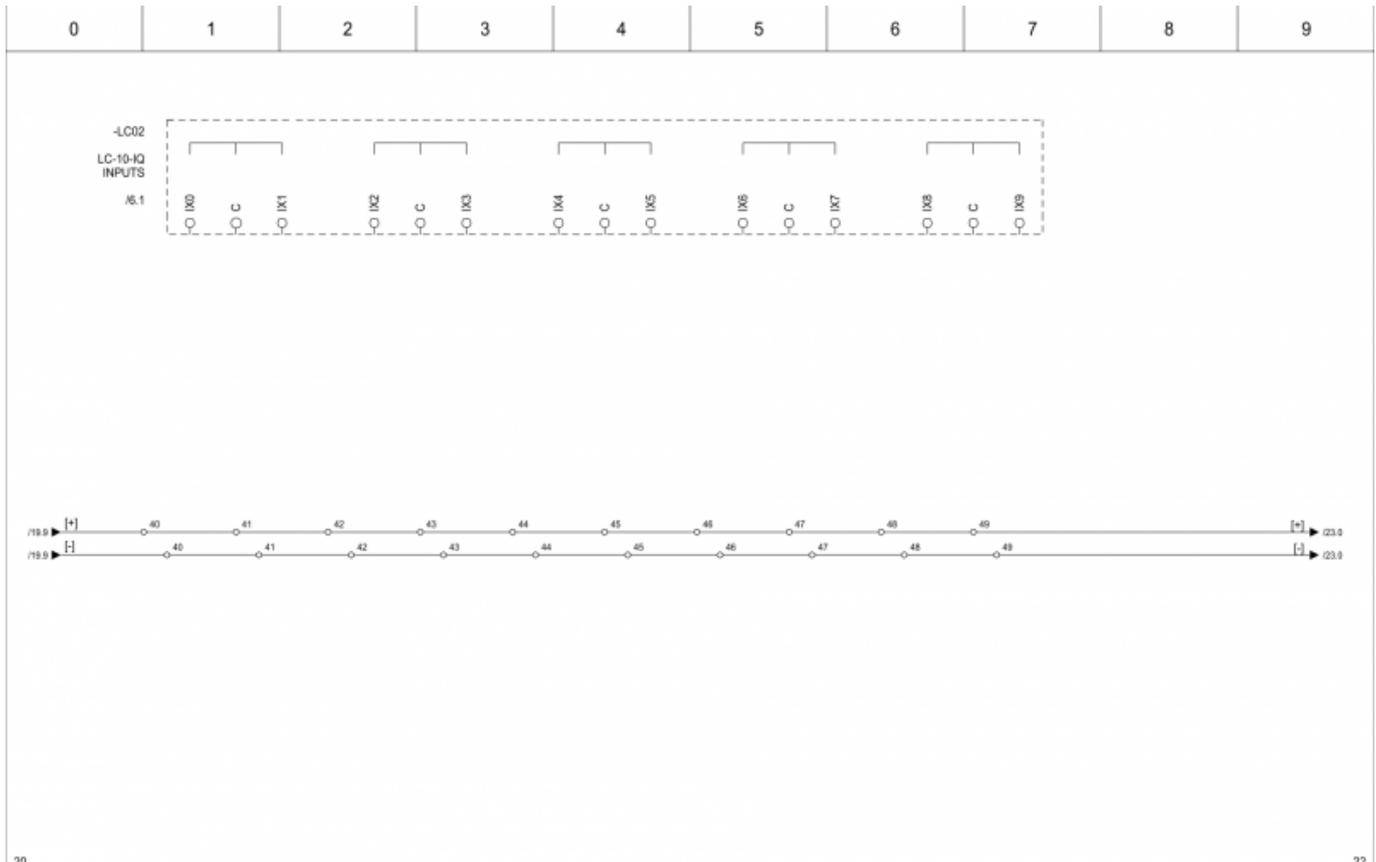


| | | | | | | | | | | | | |
|-----|---------------|-----------|--|-----------|--|---|----|-------------|-----------------------|----|------------------------------|--|
| | | | Last changed by GK Last changed 20/10/2016 Print date 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT CONTROLLER HIQ wiring diagrams | | | Drawing number 001 | | Installation = Location + | |
| Rev | Revision text | Signature | Date | 9/11/2016 | | Pages | 38 | Page number | | 21 | | |

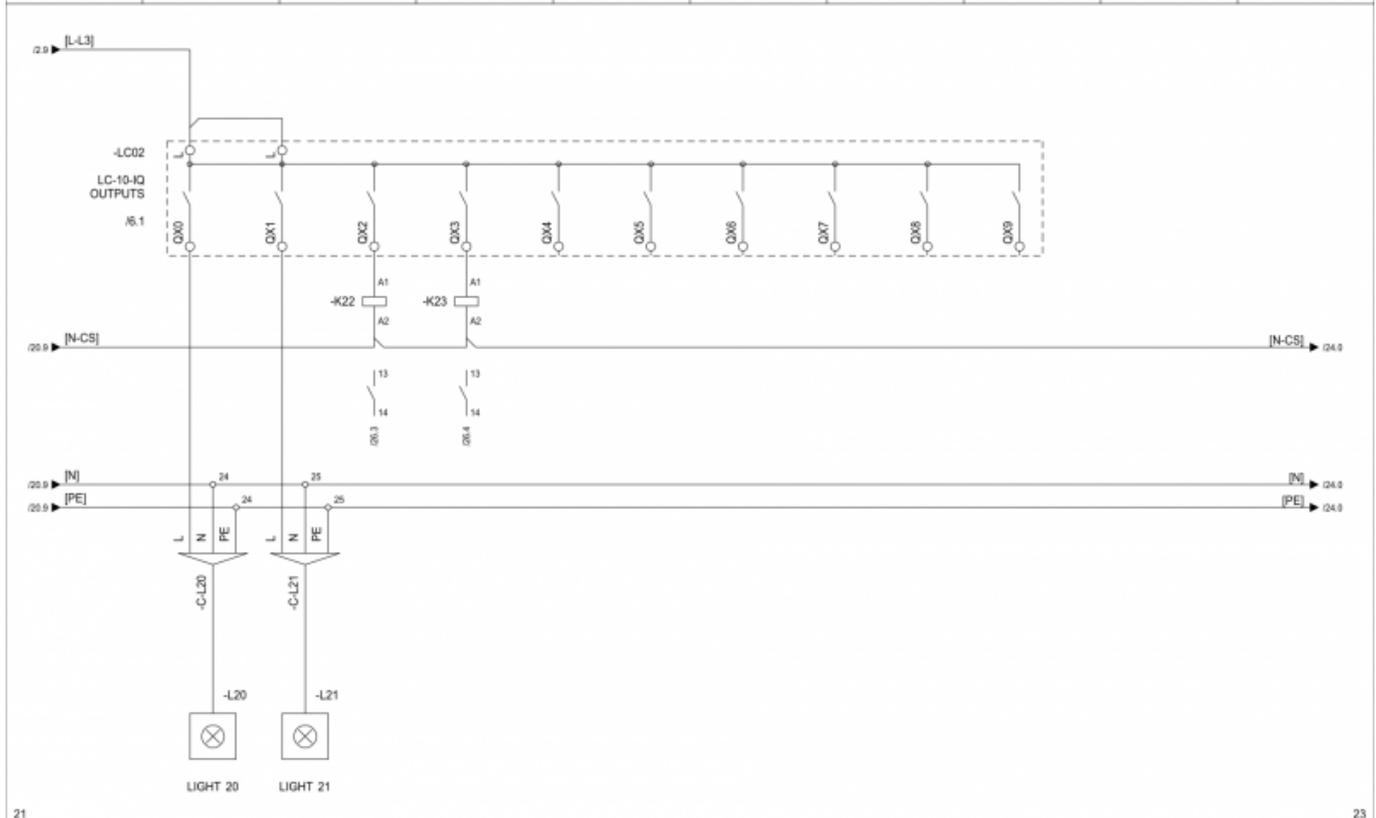

| | | | | | | | | | | | | |
|-----|---------------|-----------|---|-----------|--|---|----|-------------|-----------------------|----|------------------------------|--|
| | | | Last changed by GK Last changed 2/11/2016 Print date 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT CONTROLLER HIQ wiring diagrams | | | Drawing number 001 | | Installation = Location + | |
| Rev | Revision text | Signature | Date | 9/11/2016 | | Pages | 38 | Page number | | 22 | | |

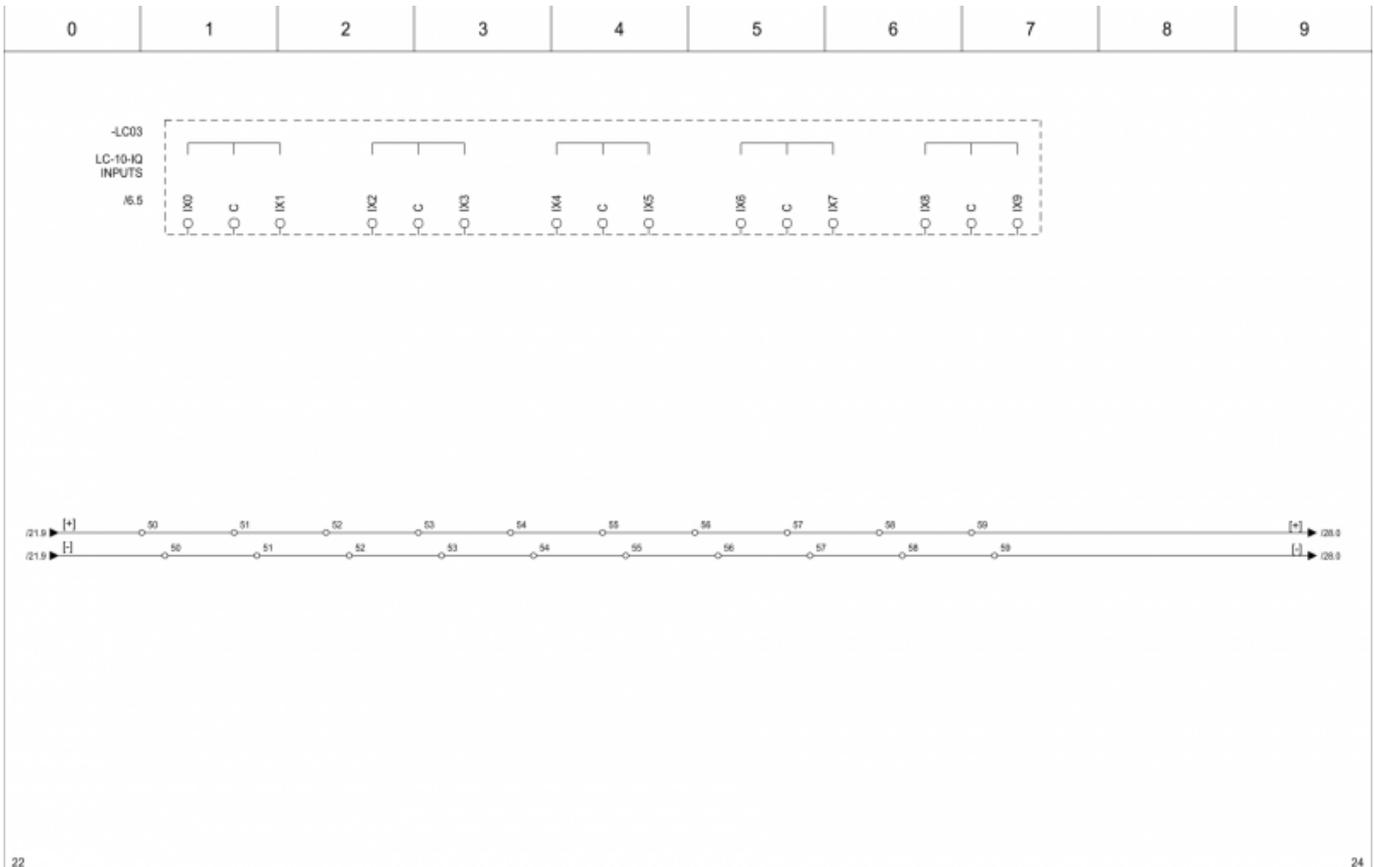


| | | | | | | | | | | | | |
|-----|---------------|-----------|---|-----------|--|---|----|-------------|------------------------------|----|------------------------------|--|
| | | | Last changed by GK Last changed 22/10/2016 Drawn by 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT CONTROLLER HIQ wiring diagrams | | | Drawing number 001 | | Installation = Location + | |
| Rev | Revision text | Signature | Date | 9/11/2016 | | Pages | 38 | Page number | | 23 | | |

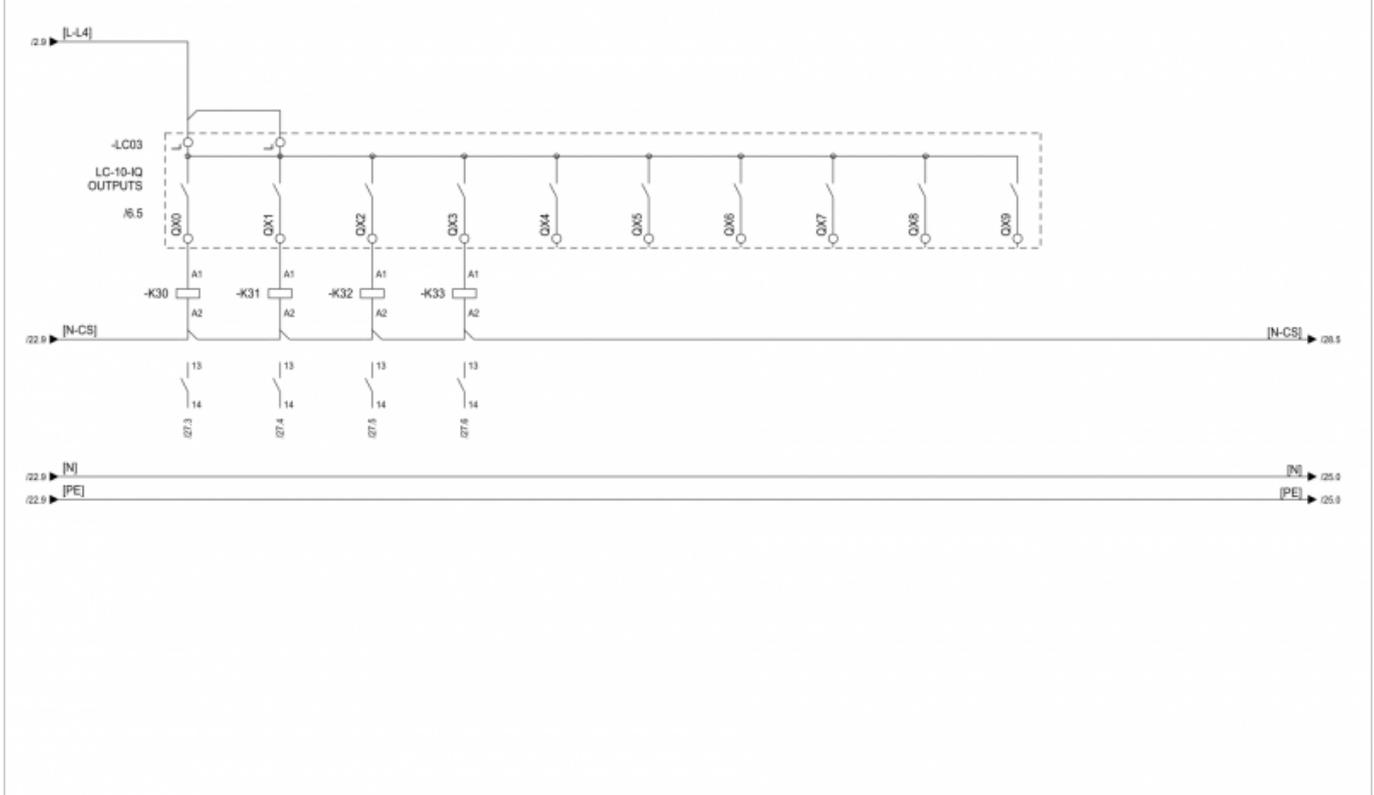


| | | | | | | | | | | | | |
|-----|---------------|-----------|--|-----------|--|---|----|-------------|------------------------------|----|------------------------------|--|
| | | | Last changed by GK Last changed 2/11/2016 Drawn by 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT CONTROLLER HIQ wiring diagrams | | | Drawing number 001 | | Installation = Location + | |
| Rev | Revision text | Signature | Date | 9/11/2016 | | Pages | 38 | Page number | | 24 | | |

Page 25-27 - Power sockets


A sample plan assumes use of managed and unmanaged sockets. Managed sockets are connected to [Light controllers](#). External installation relays should be used on Light controller outputs.

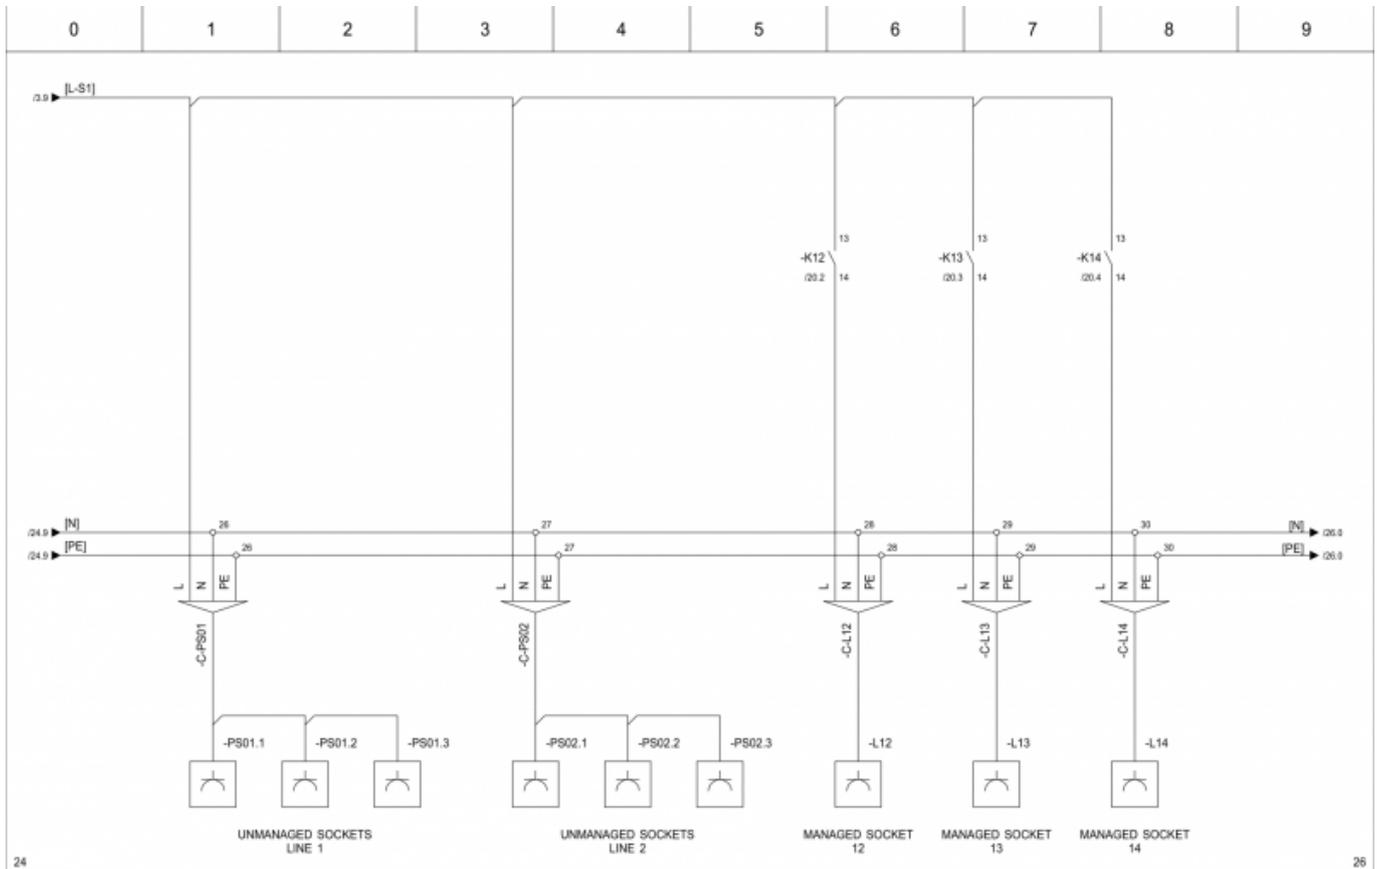

| | | | | | |
|-----|--|--|--|--|--|
| 24 | | | | 26 | |
| | | Last changed by GK Last changed 2/11/2016 Project 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | |
| Rev | | Revision text | | Signature Date | |
| | | | | POWER SOCKETS HIQ wiring diagrams | |
| | | Drawing number 001 | | Installation = Location + | |
| | | Pages 38 | | Page number 25 | |

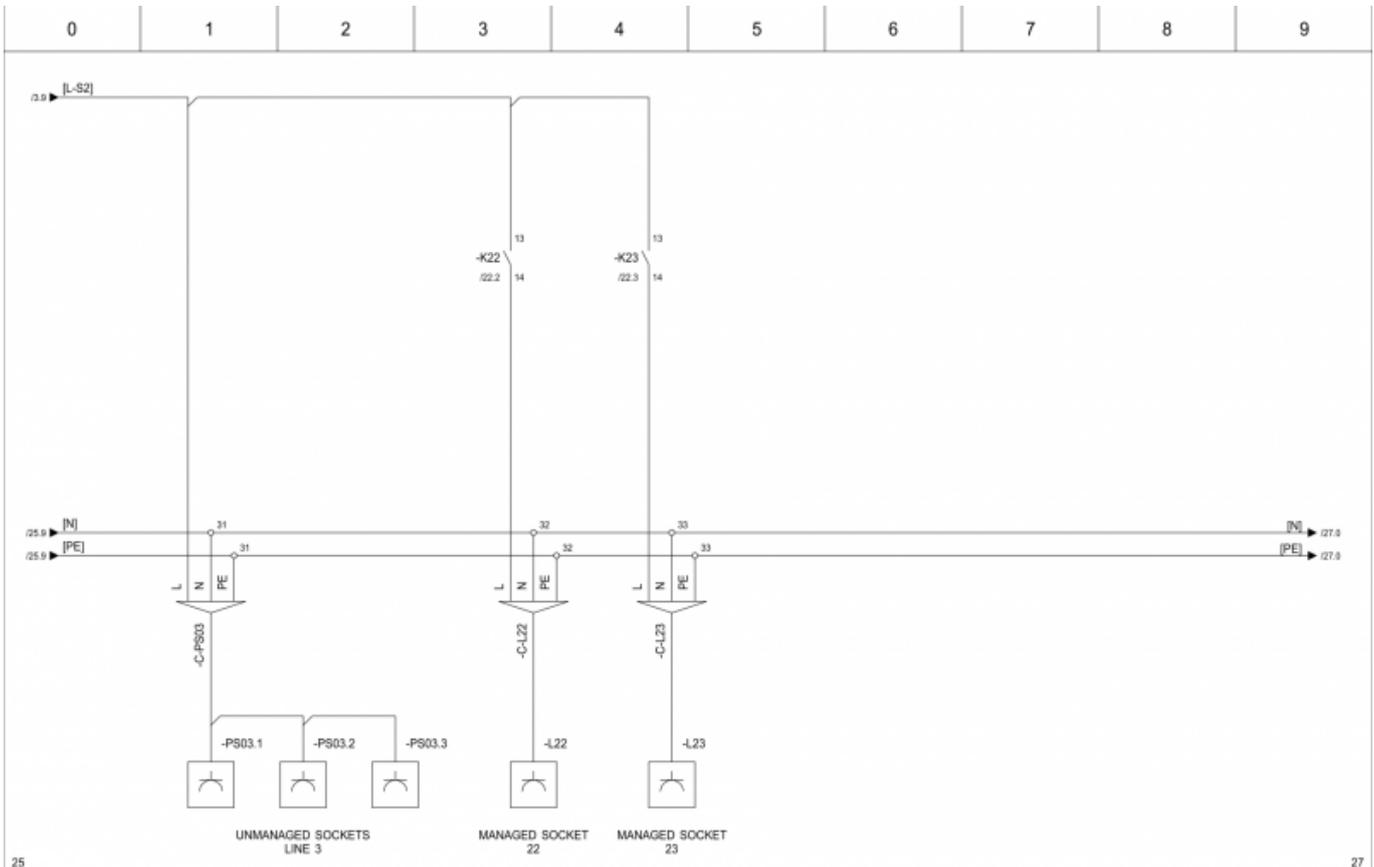


| | | | | | | | | | |
|-----|--|--|---------------------------|--|--|-----------------------|--|----------------|--|
| | | | Last changed by GK | | POWER SOCKETS HIQ wiring diagrams | Drawing number 001 | | Installation = | |
| | | | Last changed 2/11/2016 | | | Pages 38 | | Location + | |
| Rev | | | Signature | | | Date 9/11/2016 | | Page number 26 | |

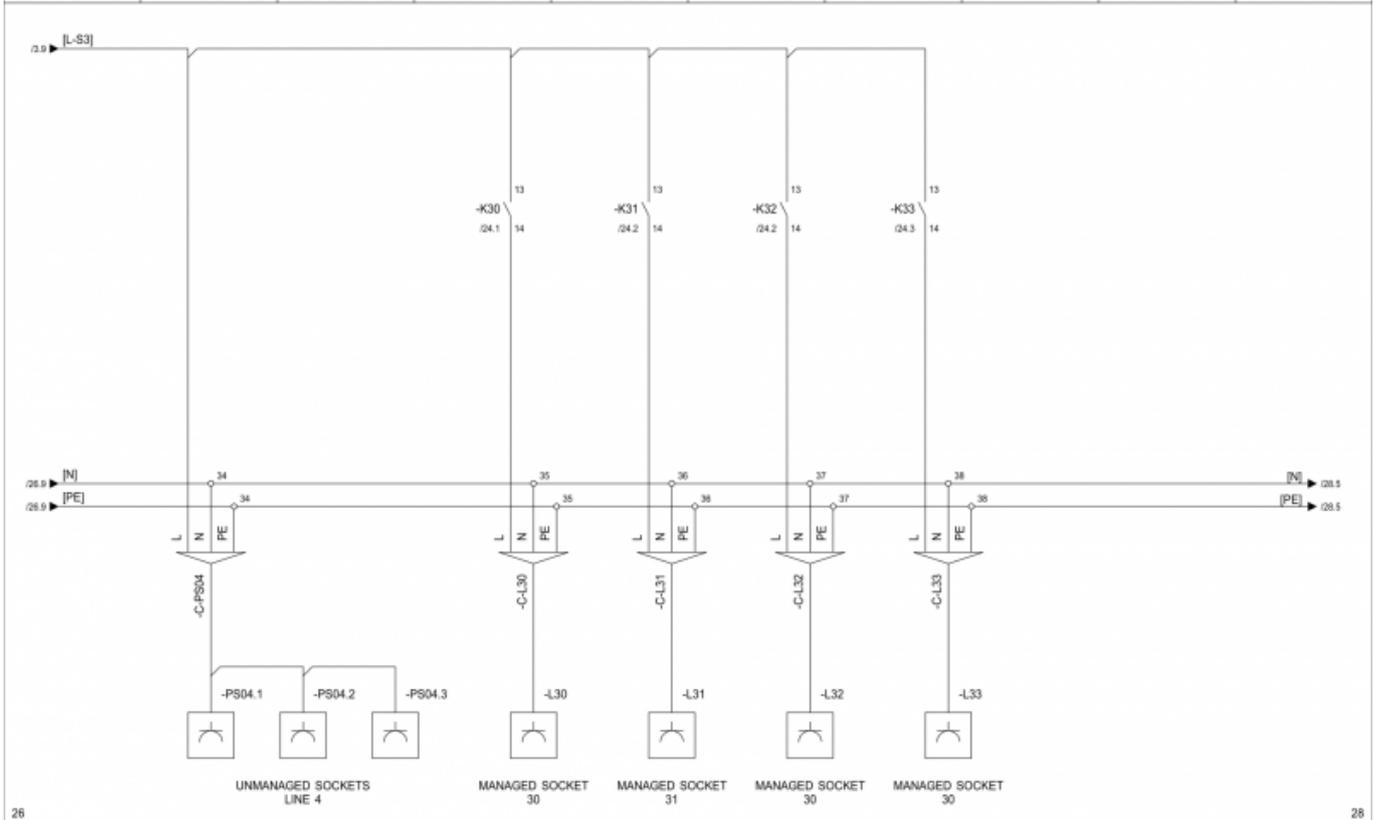

| | | | | | | | | | |
|-----|--|--|---------------------------|--|--|-----------------------|--|----------------|--|
| | | | Last changed by GK | | POWER SOCKETS HIQ wiring diagrams | Drawing number 001 | | Installation = | |
| | | | Last changed 2/11/2016 | | | Pages 38 | | Location + | |
| Rev | | | Signature | | | Date 9/11/2016 | | Page number 27 | |

Page 28-29 - Light dimmers


On sample plan we use 2 Light dimmers drivers. On each driver we can connect up to 4 LUD-12 universal light dimmers.

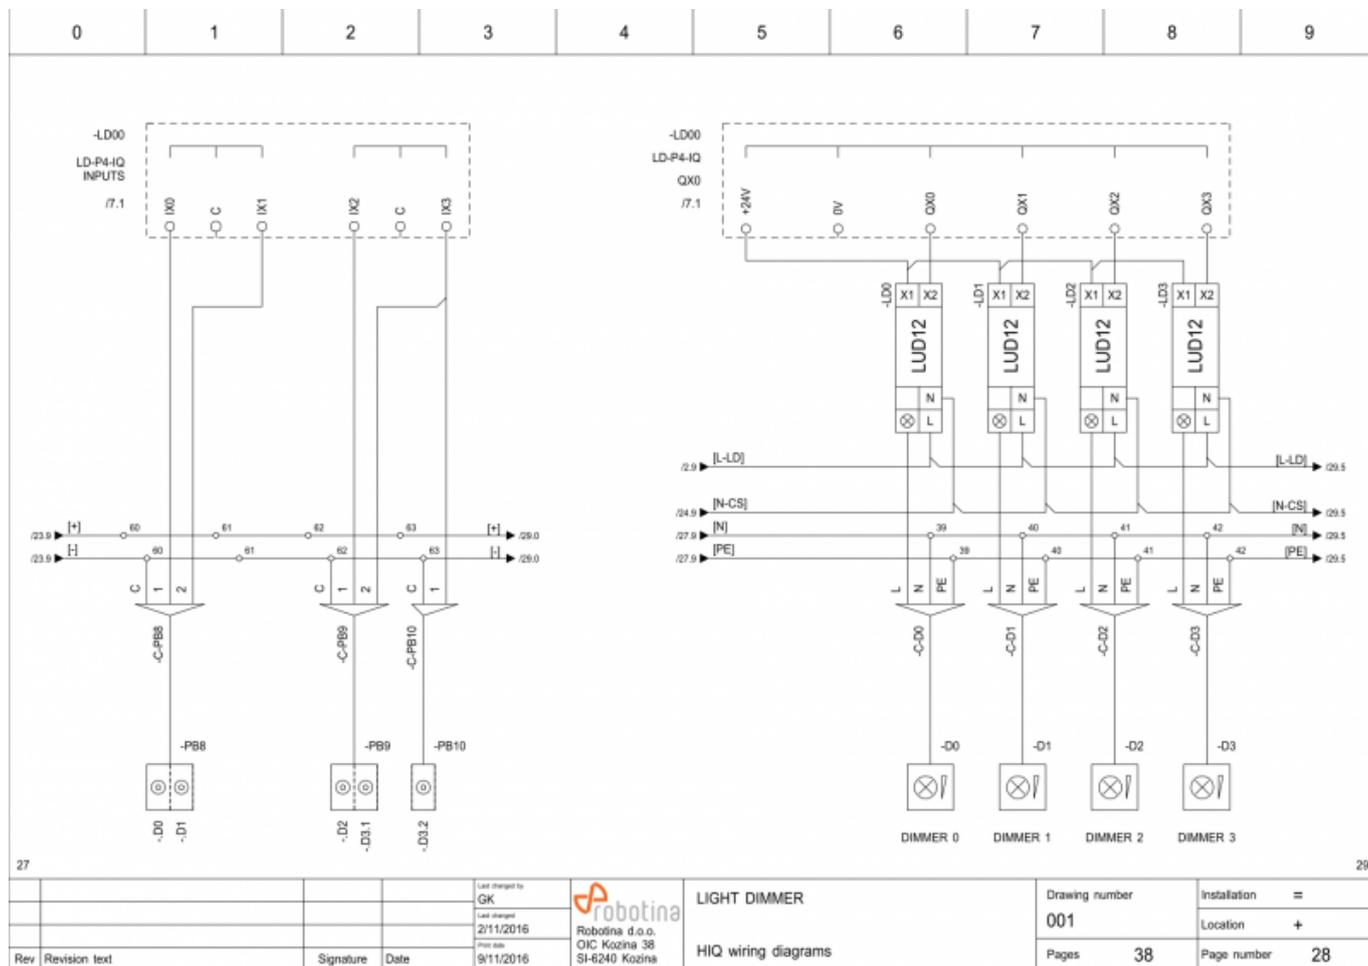

27

29


| | | | | | | | | |
|-----|---------------|-----------|------|--|--|---|---------------------------------------|--|
| | | | | Last changed by GK Last changed 2/11/2016 Project 9/11/2016 | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT DIMMER HIQ wiring diagrams | Drawing number 001 Pages 38 | Installation = Location + Page number 28 |
| Rev | Revision text | Signature | Date | | | | | |

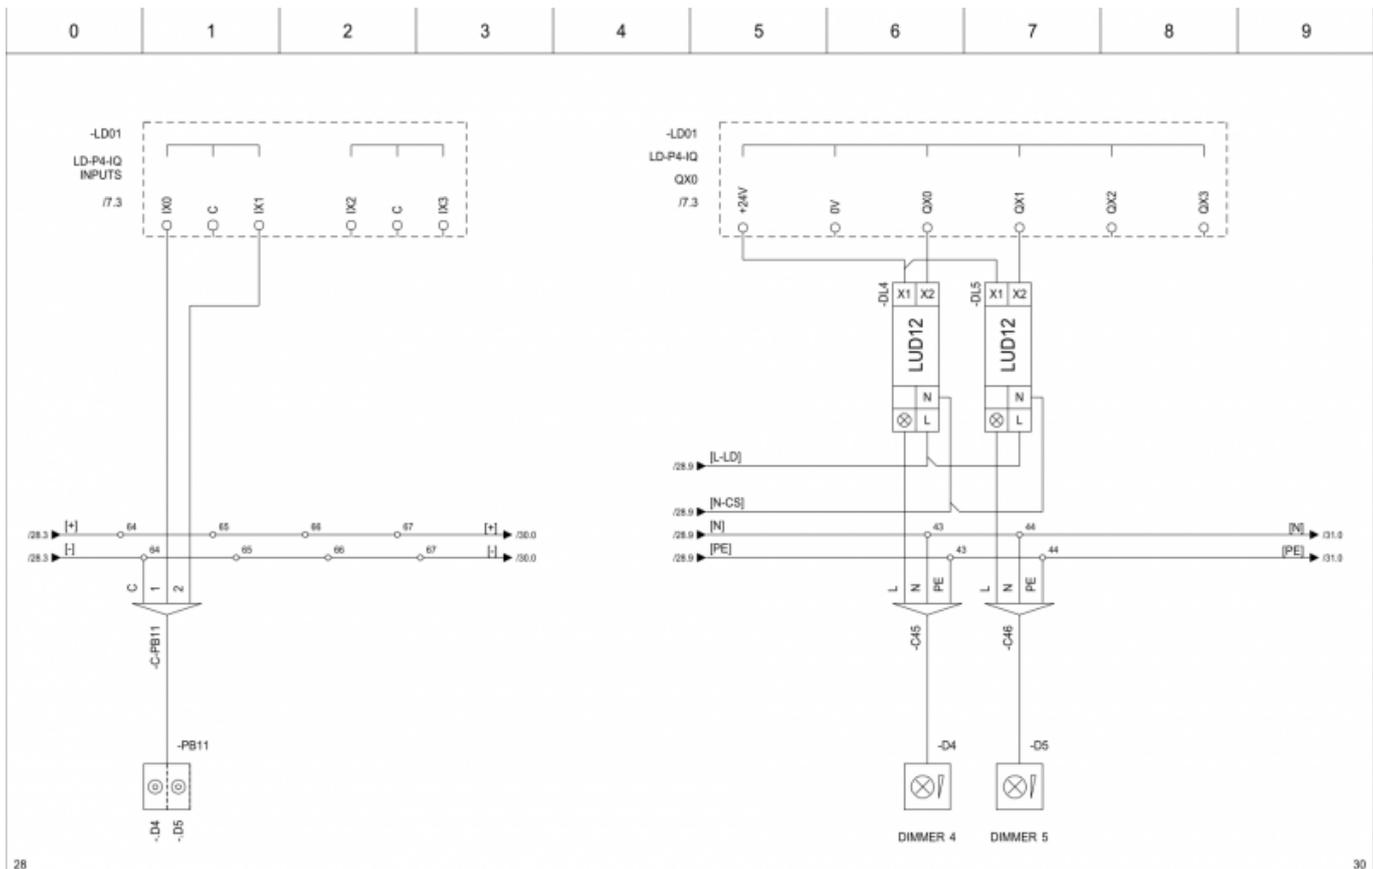


| | | | | | | | | |
|----------------------|-----------|------|-----------|---|---|--|------------------------------|-----------------------|
| | | | | Last changed by GK Last changed 2/11/2016 Drawn 9/11/2016 | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT DIMMER HIQ wiring diagrams | Drawing number 001 | Installation = |
| Rev Revision text | Signature | Date | 9/11/2016 | Pages 38 | | | Location + | Page number 29 |

Page 30-33 - Blinds controllers


On our sample plan we have 2 [Blinds controllers \(BC\)](#) with 9 blinds and 9 double-push buttons.

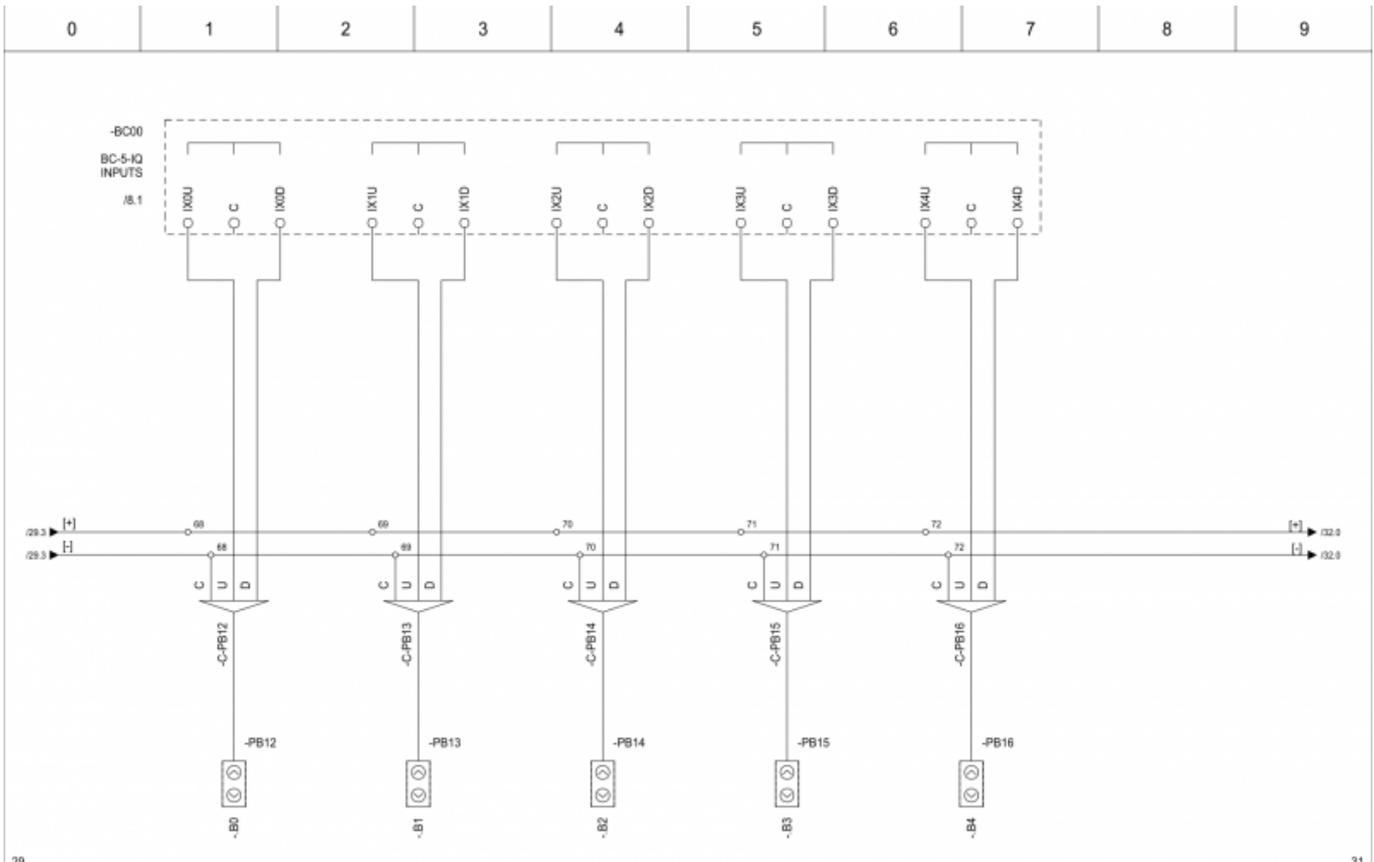


| | | | | | | | | | | | |
|-----|---------------|-----------|--|--|--|--|----|-----------------------|----|------------------------------|--|
| | | | Last changed by GK Last changed 20/10/2016 Print date 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | BLINDS CONTROLLER HIQ wiring diagrams | | Drawing number 001 | | Installation = Location + | |
| Rev | Revision text | Signature | Date | | | Pages | 38 | Page number | 30 | | |

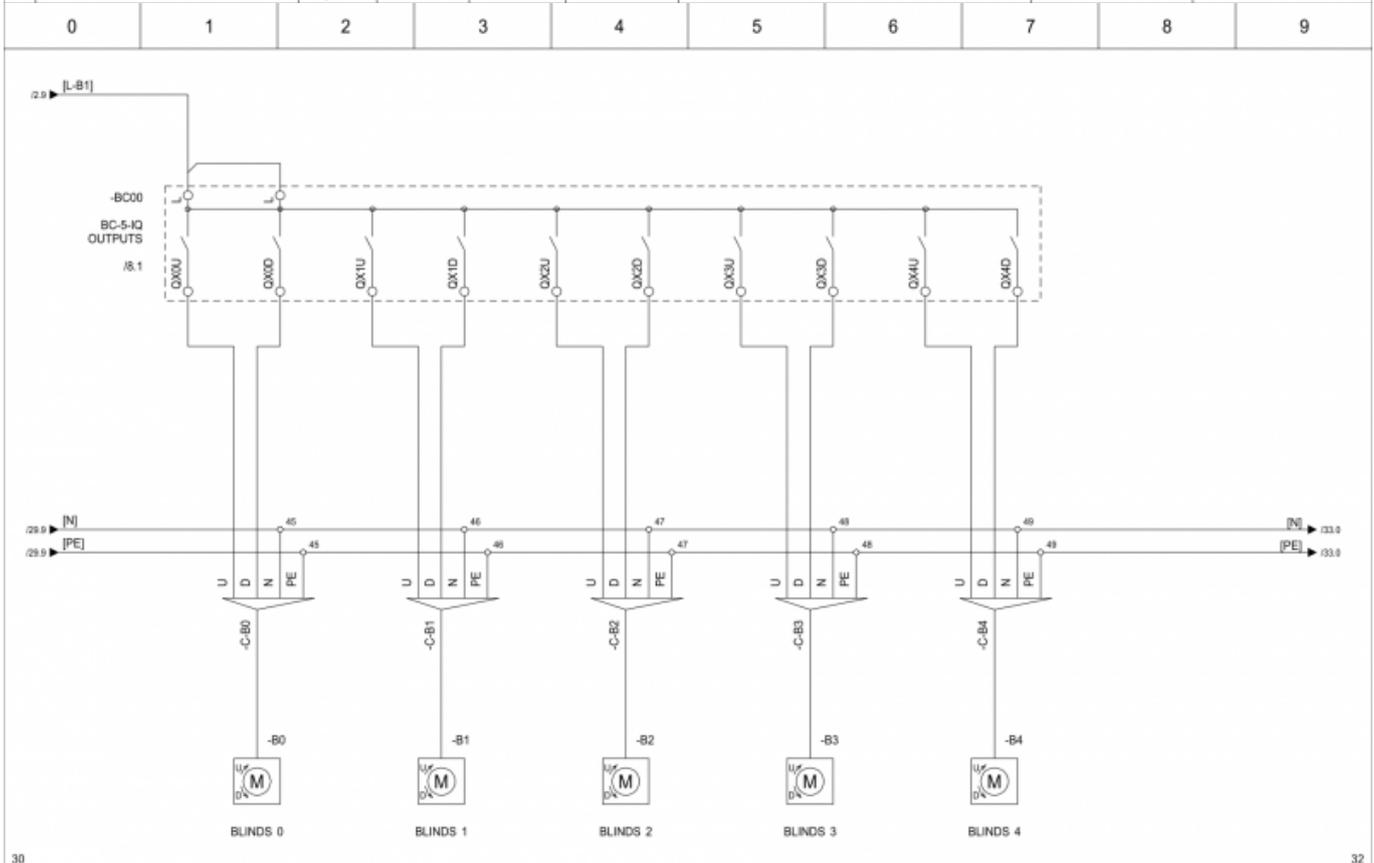

| | | | | | | | | | | | |
|-----|---------------|-----------|---|--|--|--|----|-----------------------|----|------------------------------|--|
| | | | Last changed by GK Last changed 2/11/2016 Print date 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | BLINDS CONTROLLER HIQ wiring diagrams | | Drawing number 001 | | Installation = Location + | |
| Rev | Revision text | Signature | Date | | | Pages | 38 | Page number | 31 | | |

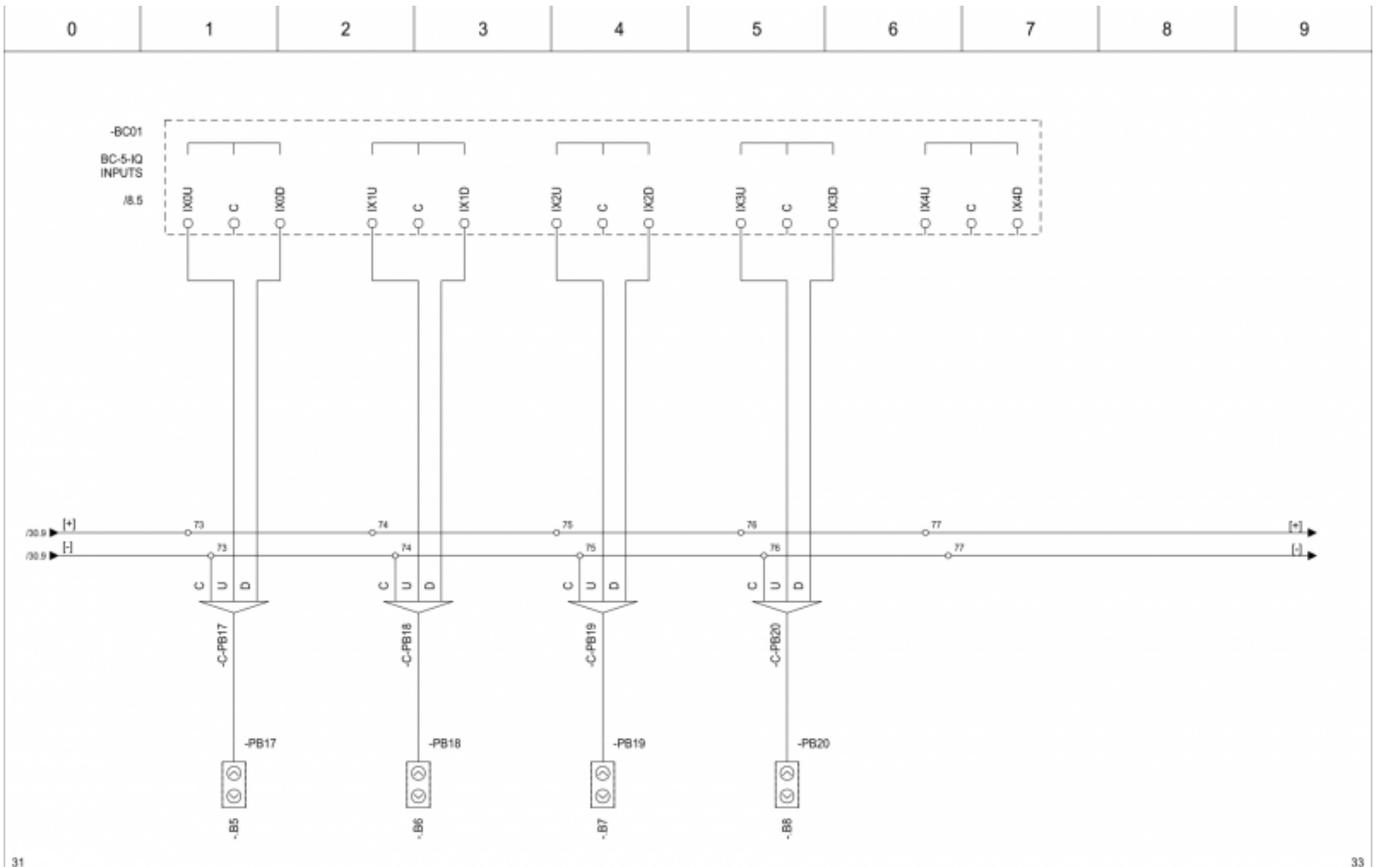


| | | | | | | | | | | | |
|-----|---------------|-----------|------|--|---|--|---|--|---|---|--|
| 31 | | | | | | | | | | 33 | |
| | | | | Last changed by: GK Last changed: 20/10/2016 Drawn by: 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | | BLINDS CONTROLLER HIQ wiring diagrams | | Drawing number: 001 Pages: 38 Installation: = Location: + Page number: 32 | |
| Rev | Revision text | Signature | Date | | | | | | | | |
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | |

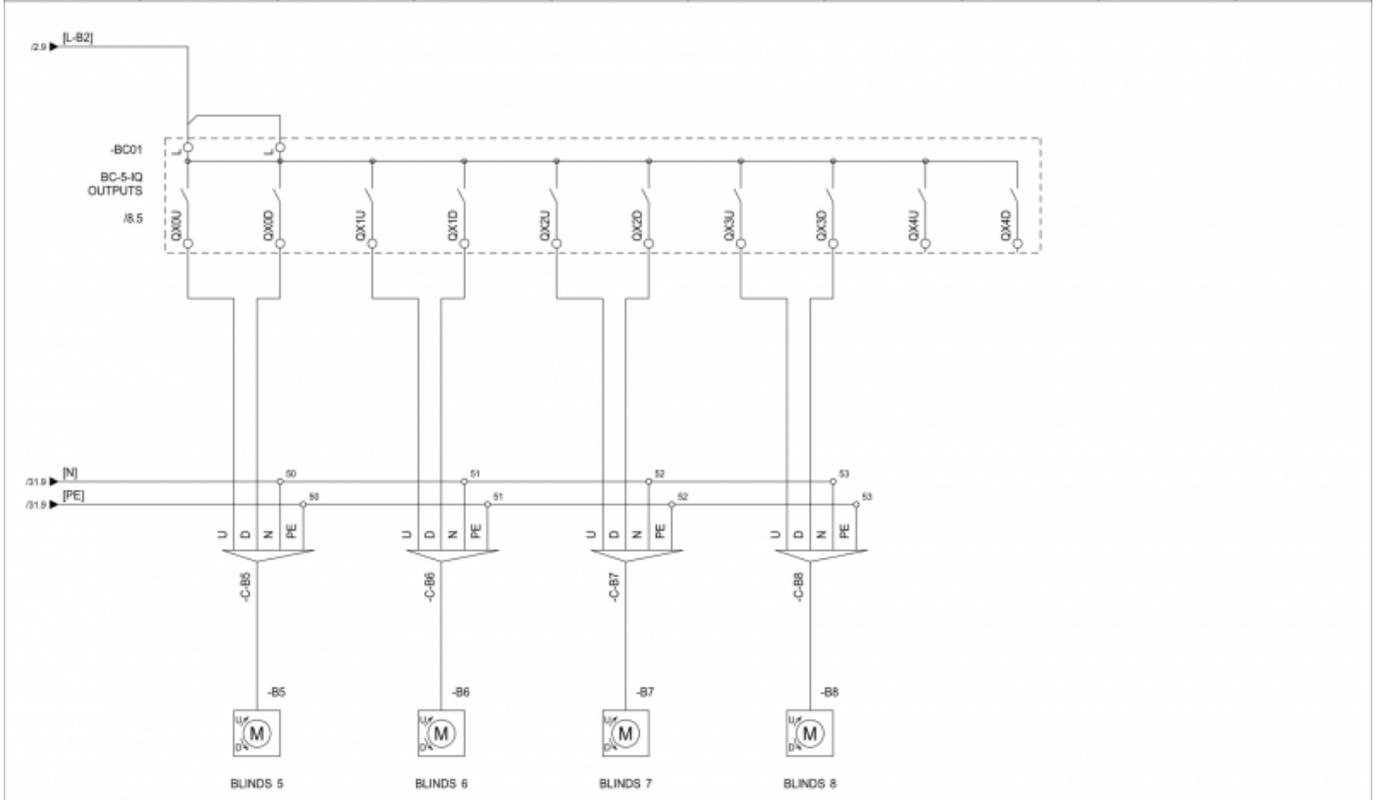

| | | | | | | | | | | | |
|-----|---------------|-----------|------|---|---|--|---|--|---|---|--|
| 32 | | | | | | | | | | 34 | |
| | | | | Last changed by: GK Last changed: 2/11/2016 Drawn by: 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | | BLINDS CONTROLLER HIQ wiring diagrams | | Drawing number: 001 Pages: 38 Installation: = Location: + Page number: 33 | |
| Rev | Revision text | Signature | Date | | | | | | | | |
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | |

Page 34-35 - LED stripe dimmer


On sample plan we use 2 LED stripe dimmers. RGBW (red-green-blue-white) LED stripe is connected on the first dimmer and the second dimmer controls 2 white LED stripes (2 outputs are empty). 2 push buttons are connected on the second dimmer.

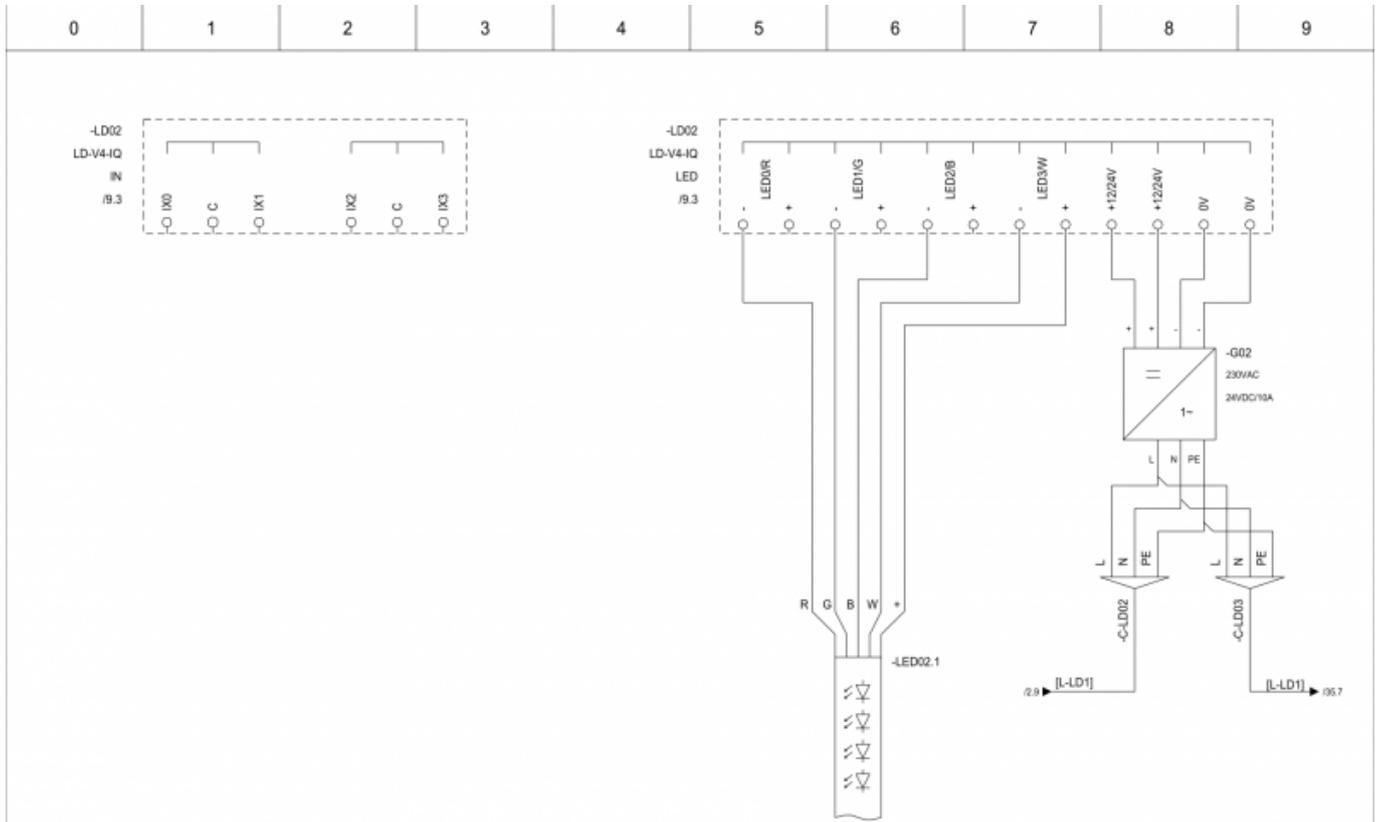

33

35


| | | | | | | | | | |
|-----|---------------|-----------|------|---------------------------|---|--------------|---------------------|----------------|----------------|
| | | | | Last changed to SS |  Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT DIMMER | Drawing number | Installation = | |
| | | | | Last changed 9/11/2016 | | | | 001 | Location + |
| Rev | Revision text | Signature | Date | Print date 9/11/2016 | | | HIQ wiring diagrams | Pages 38 | Page number 34 |

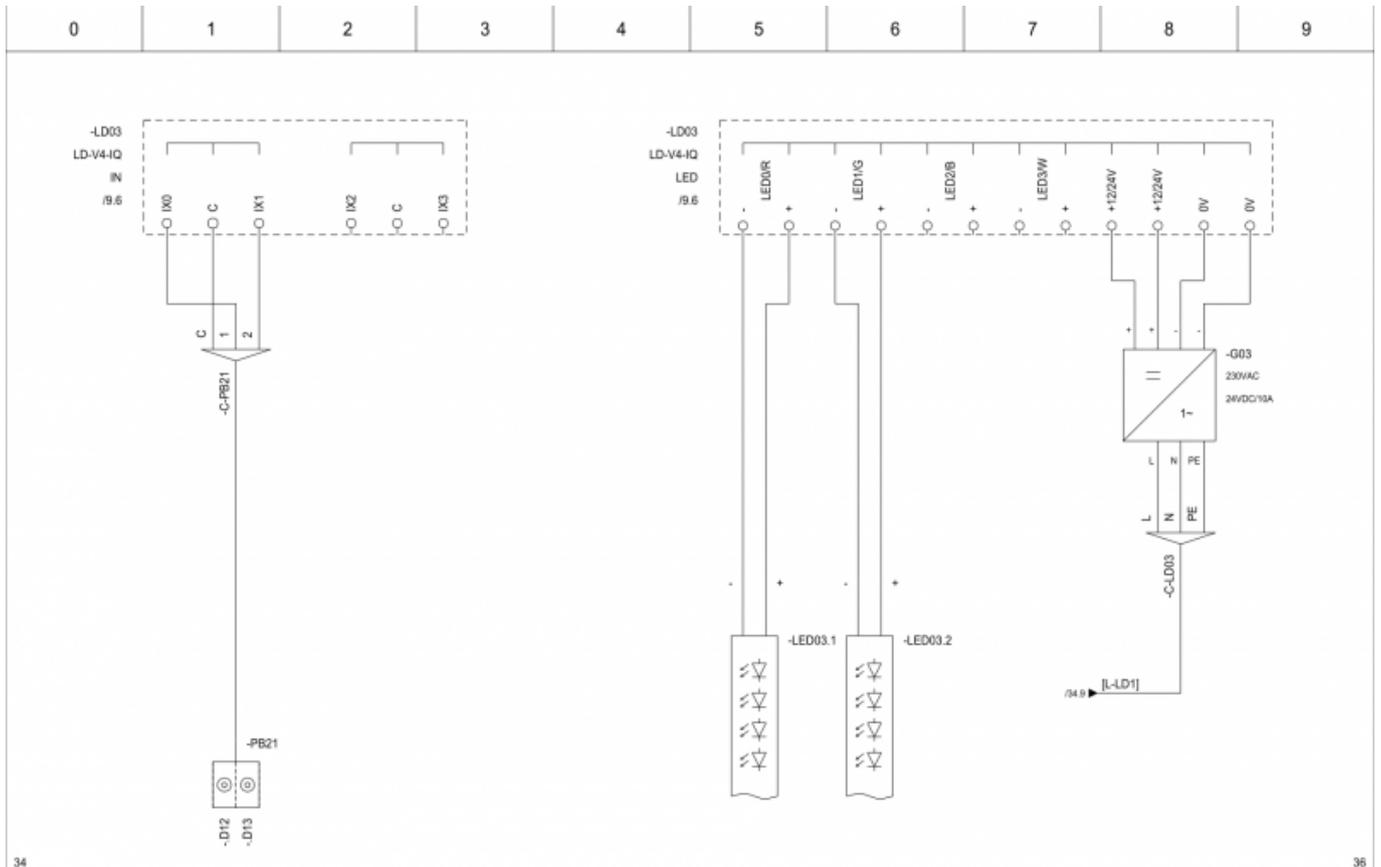


| | | | | | | | | | | |
|-----|---------------|-----------|------|--------------------------|--|---------------------|----------------|--------------|-------------|----|
| | | | | Let changed to SS |  Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | LIGHT DIMMER | Drawing number | Installation | = | |
| | | | | Let changed 9/11/2016 | | HIQ wiring diagrams | 001 | Location | + | |
| Rev | Revision text | Signature | Date | 9/11/2016 | | | Pages | 38 | Page number | 35 |

Page 36-38 - Fan-coil


Fan-coil connection.

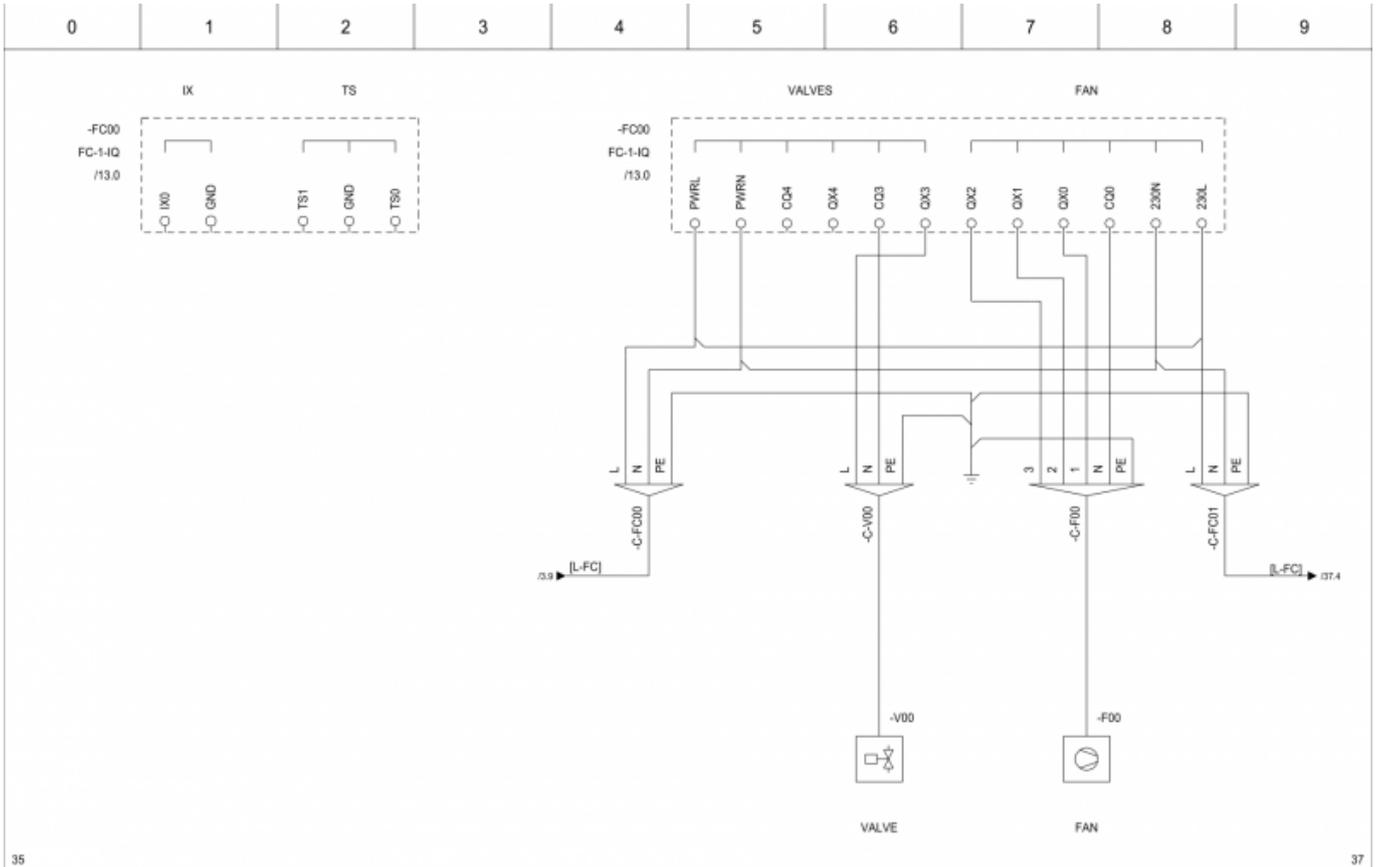

| | | | | | | | | | | | |
|-------------------------------------|--|--|--|--|--|---------------------------------|--|-----------------------|--|------------------------------|--|
| | | | Last changed by SS Last changed 9/11/2016 Draw date 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | FAN-COIL HIQ wiring diagrams | | Drawing number 001 | | Installation = | |
| Rev Revision text Signature Date | | | | | | | | Pages 38 | | Location + Page number 36 | |

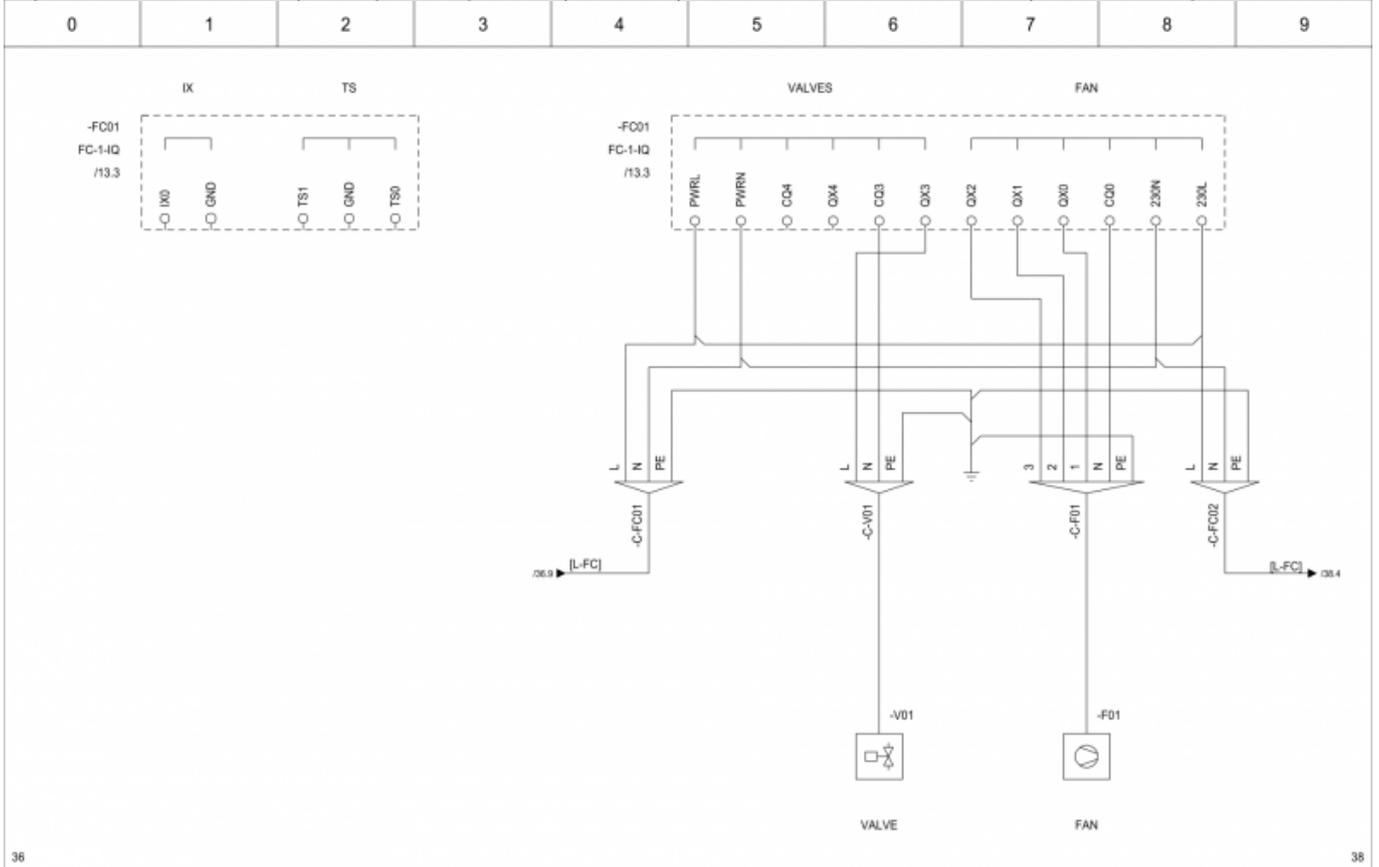

| | | | | | | | | | | | |
|-------------------------------------|--|--|--|--|--|---------------------------------|--|-----------------------|--|------------------------------|--|
| | | | Last changed by SS Last changed 9/11/2016 Draw date 9/11/2016 | | Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | FAN-COIL HIQ wiring diagrams | | Drawing number 001 | | Installation = | |
| Rev Revision text Signature Date | | | | | | | | Pages 38 | | Location + Page number 37 | |

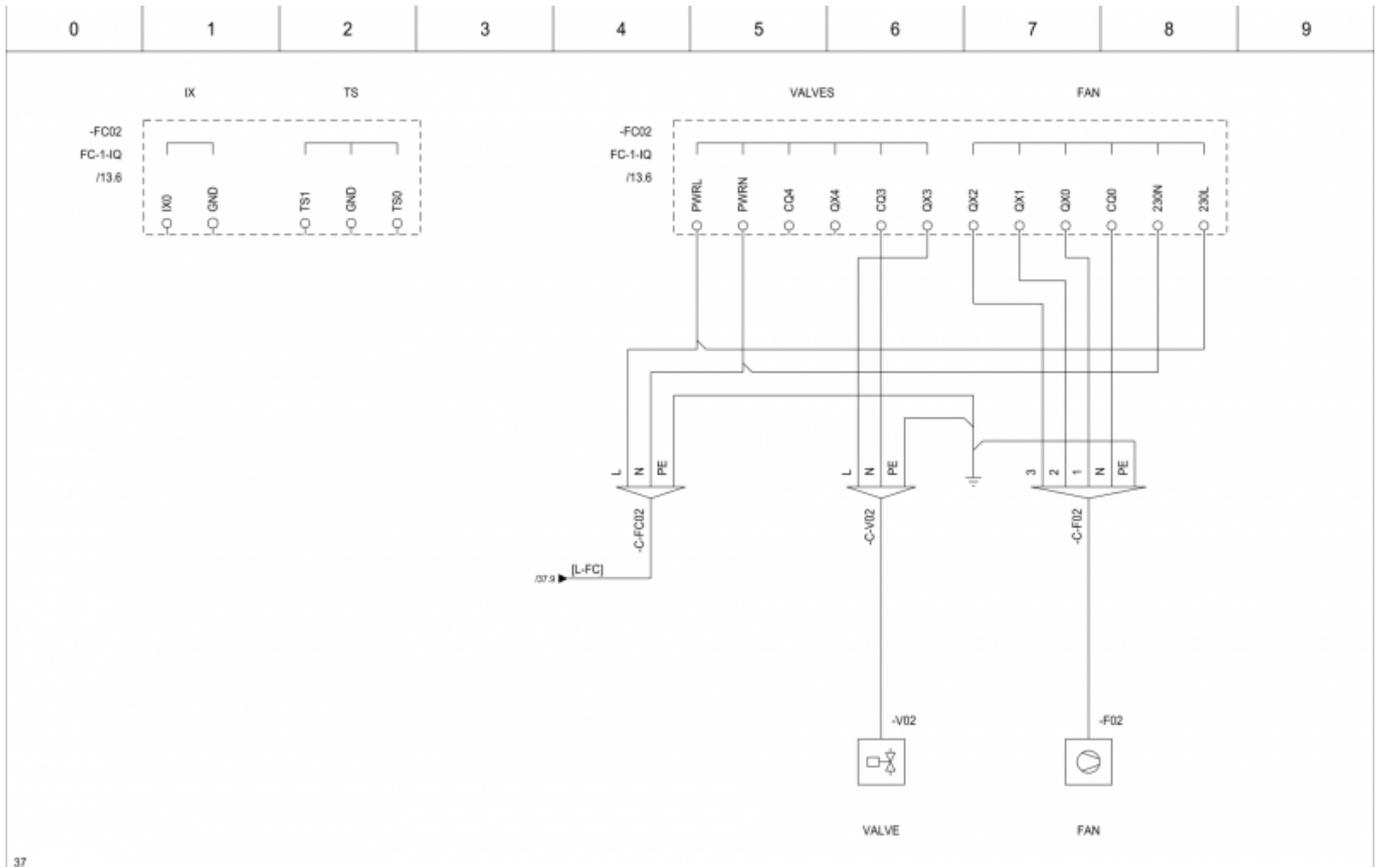

37

| | | | | | | | | |
|--|--|--|--|---|---|--|---|---|
| | | | | Last changed by GK Last changed 2/11/2016 Drawn by SI/11/2016 |  Robotina Robotina d.o.o. OIC Kozina 38 SI-6240 Kozina | FAN-COIL HIQ wiring diagrams | Drawing number 001 Pages 38 | Installation = Location + Page number 38 |
|--|--|--|--|---|---|--|---|---|

From:
<http://wiki.hiq-home.com/> -

Permanent link:
http://wiki.hiq-home.com/doku.php?id=en:hiq_home:methods:design&rev=1538747328

Last update: **2018/10/05 13:48**

