

LED power supply

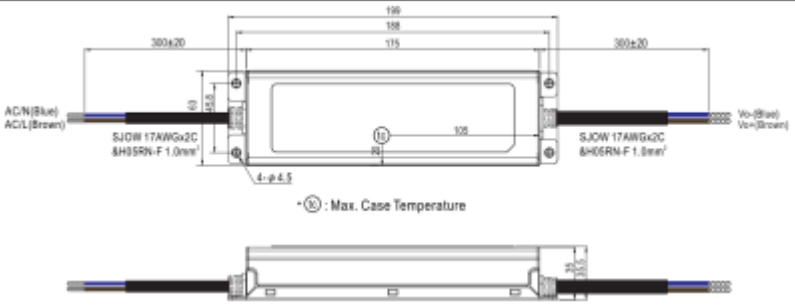
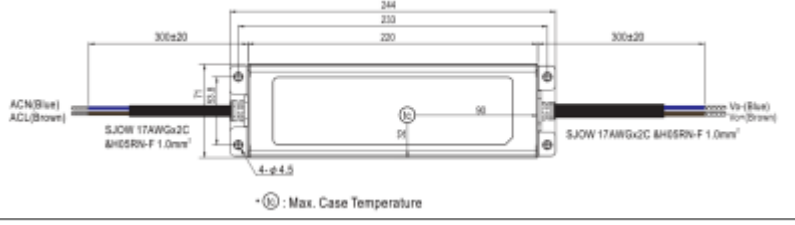
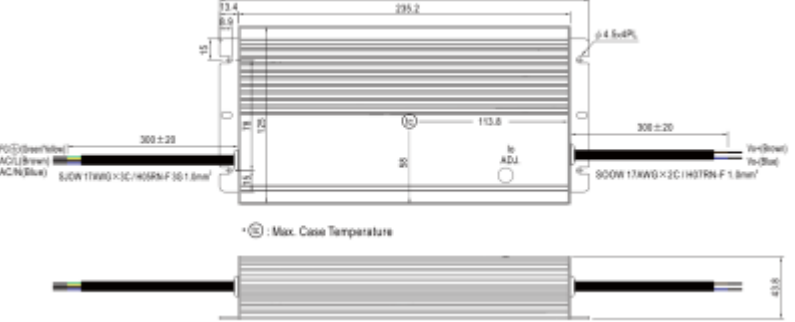
				
Non dimmable	LP-24-100	LP-24-240	LP-24-480	LP-24-600
Dimmable	LP-24-100-D	LP-24-240-D	LP-24-480-D	LP-24-600-D

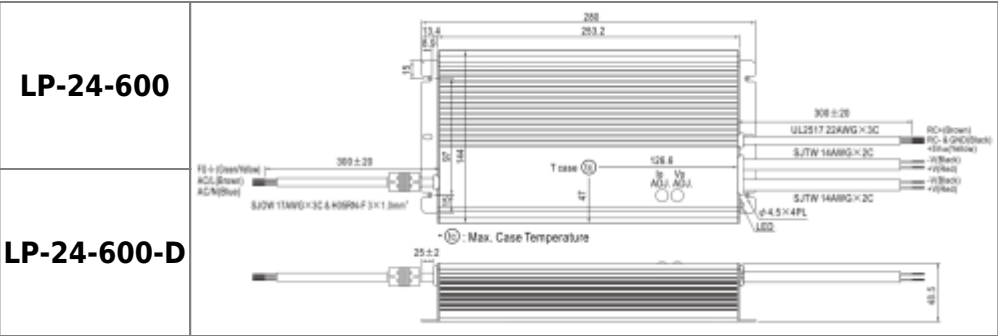
** Technical specification **

Non dimmable	LP-24-100	LP-24-240	LP-24-480	LP-24-600
Dimmable (3 in 1)*	LP-24-100-D	LP-24-240-D	LP-24-480-D	LP-24-600-D
Type	Constant voltage			
Input voltage	100-305 VAC		90-305 VAC	
Power	100 W	240 W	480 W	600 W
Output voltage	24 VDC			
Max output current	4 A	10 A	20 A	25 A
IP rating	IP65			

* **Dimmable (3 in 1): 0 ~ 10VDC, or 10V PWM signal or potentiometer**

** Dimensions **

LP-24-100	 Dimensions for LP-24-100 and LP-24-100-D: - Overall length: 300±20 - Mounting hole spacing: 198, 198, 115 - Input cable length: 300±20 - Output cable length: 300±20 - Input cable: AC/N (Blue), AC/L (Brown), SJOV 17AWGx2C 8H05RN-F 1.0mm² - Output cable: Vp (Blue), Vn (Brown), SJOV 17AWGx2C 8H05RN-F 1.0mm² - Mounting holes: 4-φ4.5 - Max. Case Temperature: 115
LP-24-100-D	
LP-24-240	 Dimensions for LP-24-240 and LP-24-240-D: - Overall length: 300±20 - Mounting hole spacing: 244, 230, 220 - Input cable length: 300±20 - Output cable length: 300±20 - Input cable: AC/N (Blue), AC/L (Brown), SJOV 17AWGx2C 8H05RN-F 1.0mm² - Output cable: Vp (Blue), Vn (Brown), SJOV 17AWGx2C 8H05RN-F 1.0mm² - Mounting holes: 4-φ4.5 - Max. Case Temperature: 115
LP-24-240-D	
LP-24-480	 Dimensions for LP-24-480 and LP-24-480-D: - Overall length: 300±20 - Mounting hole spacing: 262, 235.2, 113.6 - Input cable length: 300±20 - Output cable length: 300±20 - Input cable: AC/N (Blue), AC/L (Brown), SJOV 17AWGx2C 8H05RN-F 1.0mm² - Output cable: Vp (Blue), Vn (Brown), SJOV 17AWGx2C 8H05RN-F 1.0mm² - Mounting holes: 4-φ4.5 - Max. Case Temperature: 115
LP-24-480-D	



From:

<https://wiki.hiq-home.com/> -

Permanent link:

https://wiki.hiq-home.com/doku.php?id=en:hiq_hw:lp

Last update:

2019/08/20 14:21

