


Master Controller

Advanced Controller

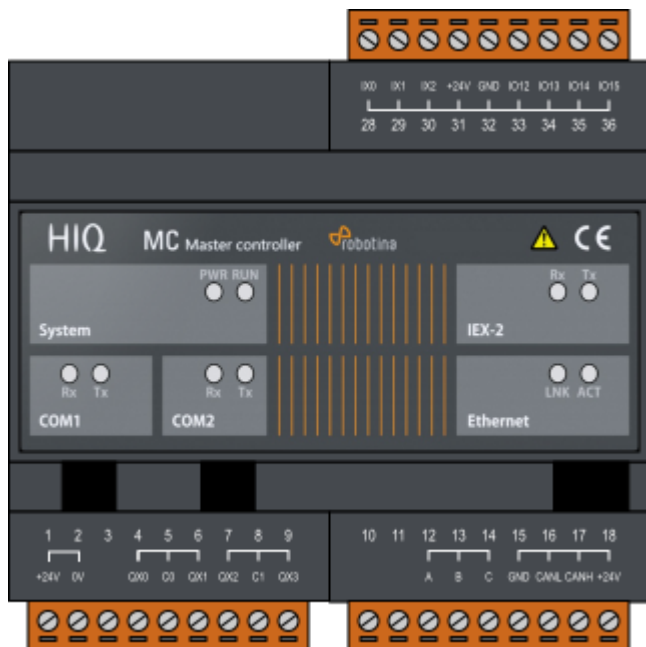

| | | |
|---------------|---------------------|--|
| Model number: | MC-24-01 | 24 VDC, 11 IO, Enocan, 2 × RS232, RS485, IEX2 terminals |
| | MC-24-02 | 24 VDC, 11 IO, 2 × RS232, RS485, IEX2 terminals |
| | MC-24-03 | 24 VDC, 11 IO, Enocan, 2 × RS232, isolated RS485, IEX2 terminals |
| | MC-24-04 | 24 VDC, 11 IO, 2 × RS232, isolated RS485, IEX2 terminals |
| Mounting: | DIN rail, 6M, 106mm | |
| Dimensions: | 106x108x58mm | |

Features

- 3 digital inputs
- 4 relay outputs 8 A
- 4 universal inputs/outputs
- Ethernet, USB, IEX-2, 2×RS232, 1×RS485 (optional isolated)
- Enocan gateway (optional)
- 24 VDC power supply


Safety standards

EN 61010-1, EN 61010-2-201, EN 61131-2

Technical specification

| | |
|------------------------|---|
| Relay outputs: | 8A/250V |
| Communication: | Ethernet, 2x RS232, 1x RS485, IEX-2 bus |
| Nominal power rating: | 24 VDC |
| Power consumption: | 50 mA (no load), 180 mA max |
| Ingress protection: | IP20 |
| Operating temperature: | 0..50°C |
| Storage temperature: | -40..85°C |
| Relative humidity: | 0..85% n/c |

Terminals

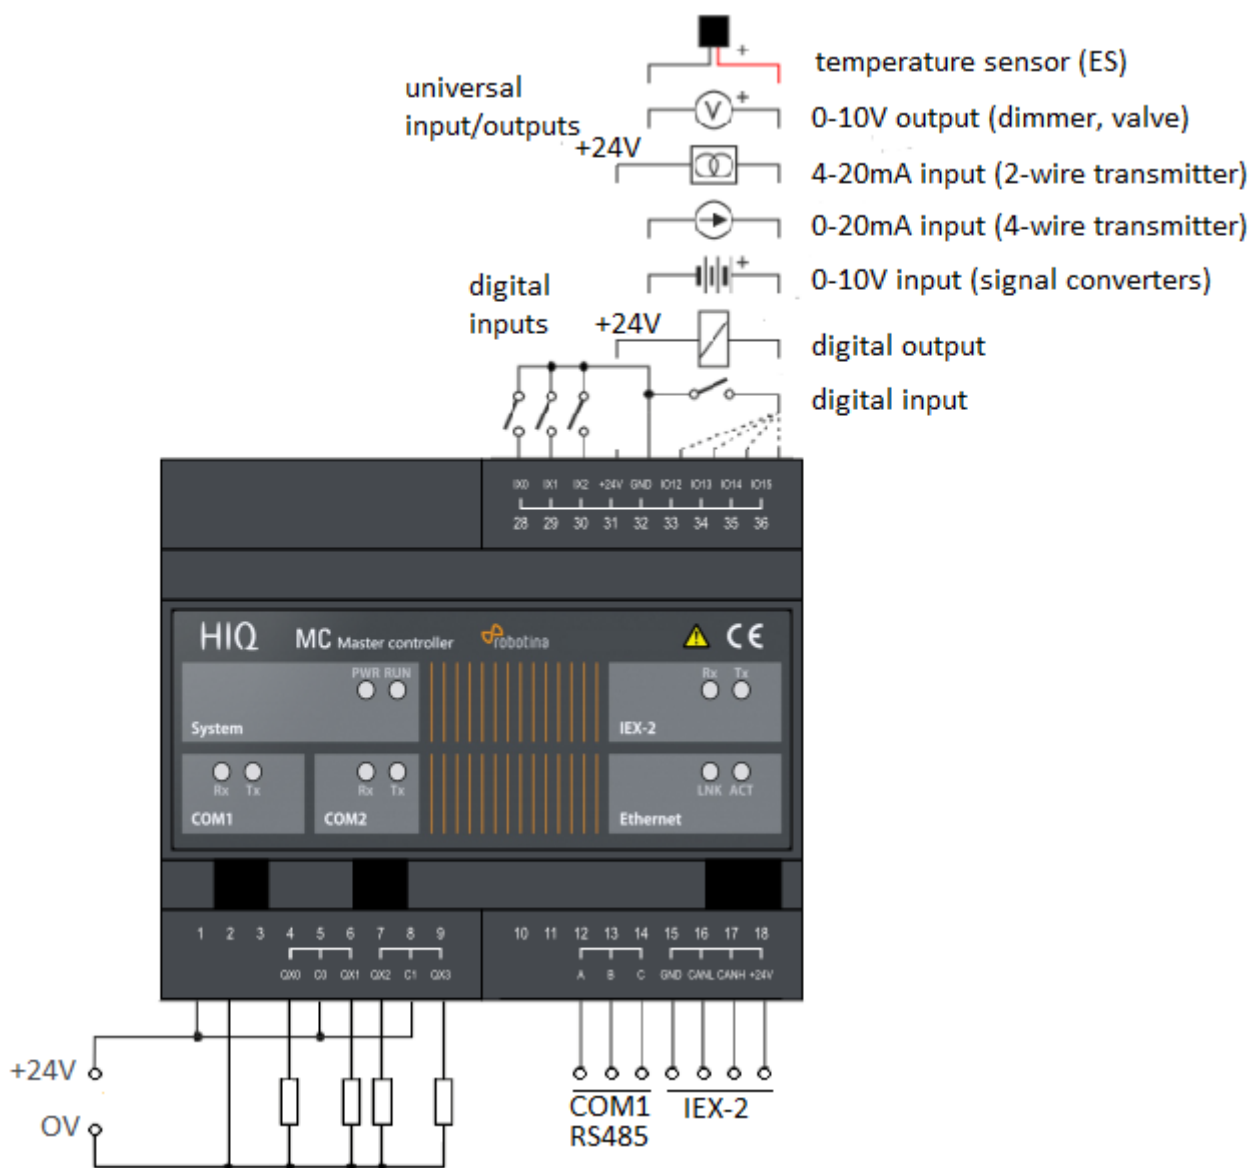

From:
<http://wiki.hiq-home.com/> -

Permanent link:
http://wiki.hiq-home.com/doku.php?id=en:hiq_hw:mc-24&rev=1594897079

Last update: **2020/07/16 10:57**

