
Wireless DIN rail power meter

Wireless DIN rail power meter, external power relay switching and consumer measurement

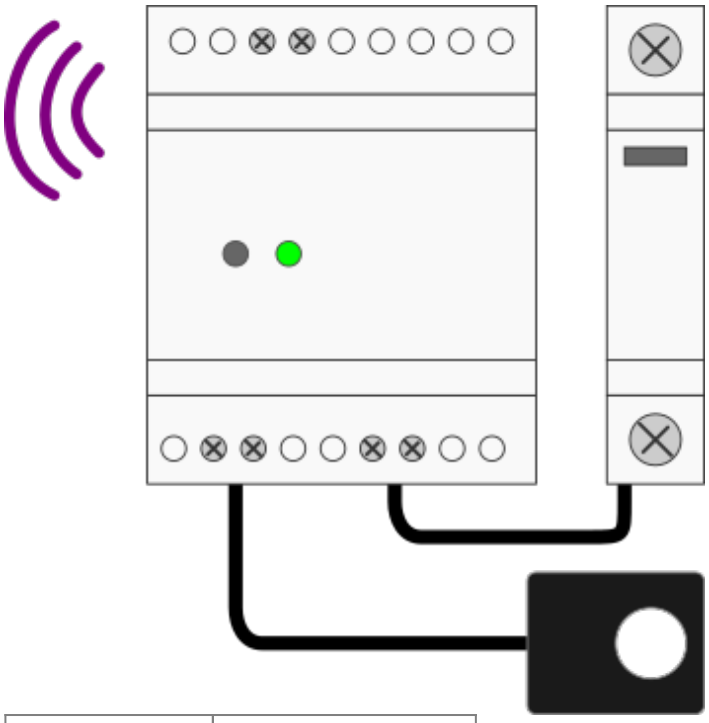

Model number:	**PM1-WN-D**
Mounting:	DIN rail, 4M
Dimensions:	72 × 110 × 60 mm

Used for single phase managed consumer	
✔	toggling power supply using external power relay
✔	measuring power and energy using clamp-on current transformer

Features

- Wireless load management, external power-relay control
- Consumer measurements, clamp-on current transformer

General description

Wireless DIN rail power meter PM1-WN-D is a DIN rail mounted control unit. It can switch on/off an external power-relay and measure active power and energy consumption.

This device has to be directly and continuously main powered. For network purposes, it is a Router


(Repeater) i.e. it has function of maintaining radio traffic from and to other similar devices and it can also act as a parent device for battery-powered sensors of the same family.

Technical specifications


POWER SUPPLY	85-250 Vac; 50/60 Hz
WIRELESS CHARACTERISTICS	2405 MHz ÷ 2480 MHz
	DSSS Modulation
	Nominal transmission Power +3dBm
	IEEE 802.15.4 compliant
	Stack EmberZNet3.5.x
	Stack version 0
	Proprietary profile ID
	Proprietary encryption key
MEASURES	Energy consumed [Wh]
	Active Power [W]
	Time of measurement [sec]
MAXIMUM LOAD	15 kW
RELAY CHARACTERISTICS	Contacts 10A 250V (resistive load)
CONNECTIONS	Terminal blocks
OPERATING CONDITIONS	-10 + 55 °C
PROTECTION CLASS	IP30

Terminals

PM1-WN-D			
MAINS	16	**Power source**	L
	17		N
CT	2	**Current transformer**	black
	3		red
Relay	6	**Power relay**	coil power supply
	7		coil

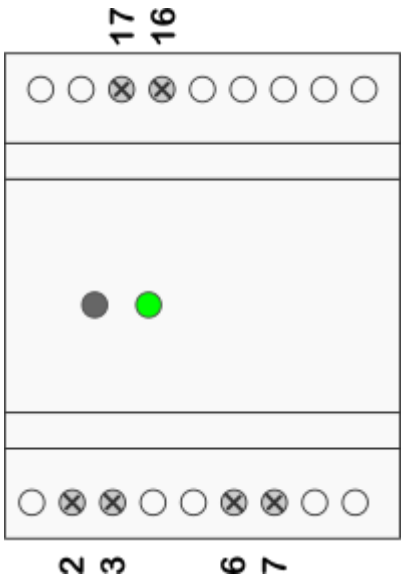

Connection

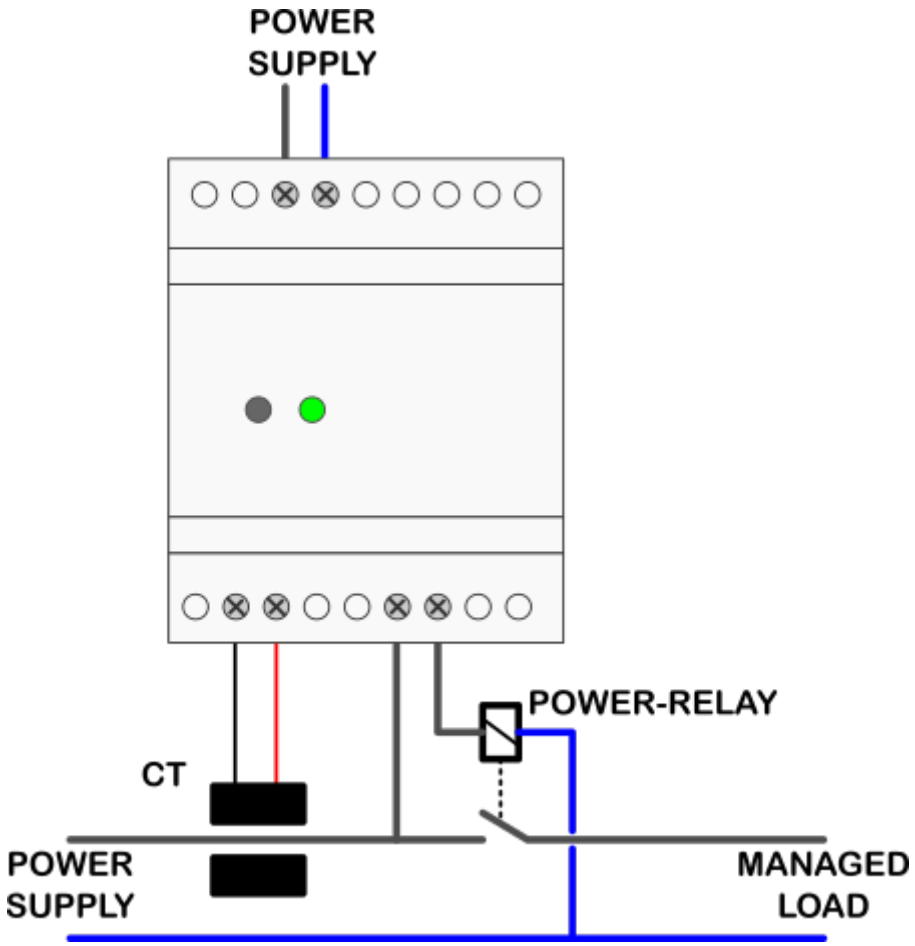

From:
https://wiki.hiq-home.com/ -

Permanent link:
https://wiki.hiq-home.com/doku.php?id=en:hiq_hw:pm1-wn-d&rev=1565779794

Last update: **2019/08/14 10:49**