


# Wireless relay

## Single-phase power relay and consumer measurement

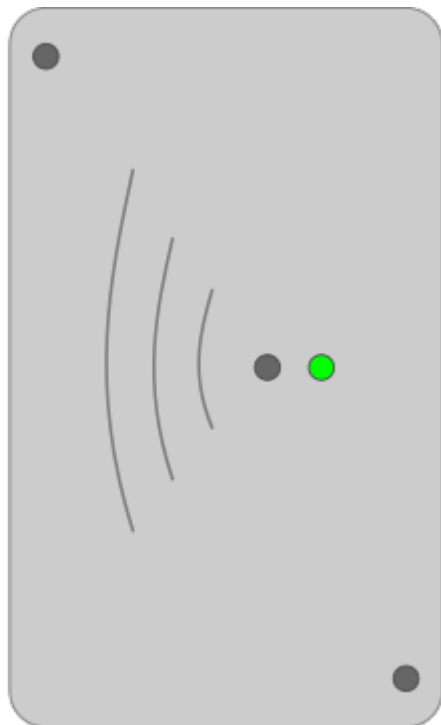

Model number:	<b>RL1-WN-W</b>
Mounting:	On wall
Dimensions:	76 × 116 × 25 mm

### Used for single phase managed consumer

✓	tooggling power supply
✓	measuring power and energy

## Applications

- Wireless power-relay with consumer measurements

## Features

- Wireless load management
- Consumer measurements

## General description

Wireless relay RL1-WN-W is a wall mounted control unit. It can switch on/off an electric load, measure active power and energy consumption.


This device has to be directly and continuously main powered. For network purposes, it is a Router (Repeater) i.e. it has function of maintaining radio traffic from and to other similar devices and it can also act as a parent device for battery-powered sensors of the same family.

## Technical specifications


POWER SUPPLY	85-250 Vac; 50/60 Hz
WIRELESS CHARACTERISTICS	2405 MHz ÷ 2480 MHz
	DSSS Modulation
	Nominal transmission Power +3dBm
	IEEE 802.15.4 compliant
	Stack EmberZNet3.5.x
	Stack version 0
	Proprietary profile ID
	Proprietary encryption key
MEASURES	Energy consumed [Wh]
	Active Power [W]
	Time of measurement [sec]
RELAY CHARACTERISTICS	Contacts 10A 250V (resistive load)
CONNECTIONS	Terminal blocks
OPERATING CONDITIONS	-10 + 55 °C
PROTECTION CLASS	IP30

## Terminals

RL1-WN-W		Power source	Consumer
PE	PE 1	PE	/
	PE 1a	/	PE
Neutral	N 2	N	/
	N 2a	/	N
Phase IN	L 3	L	/
Phase OUT	L 3a	/	L
Not used	L 3b	/	/

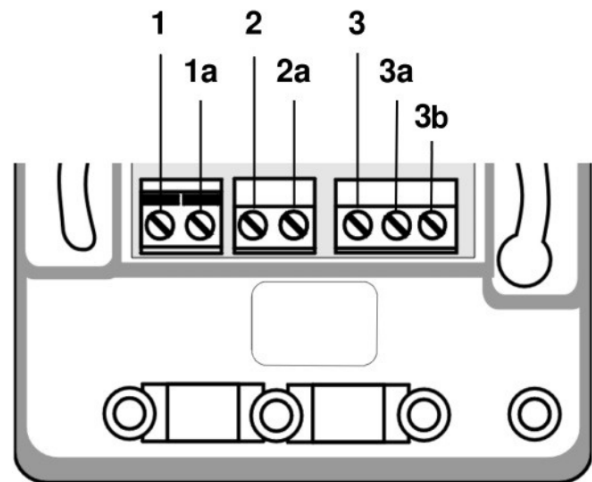

## Connection

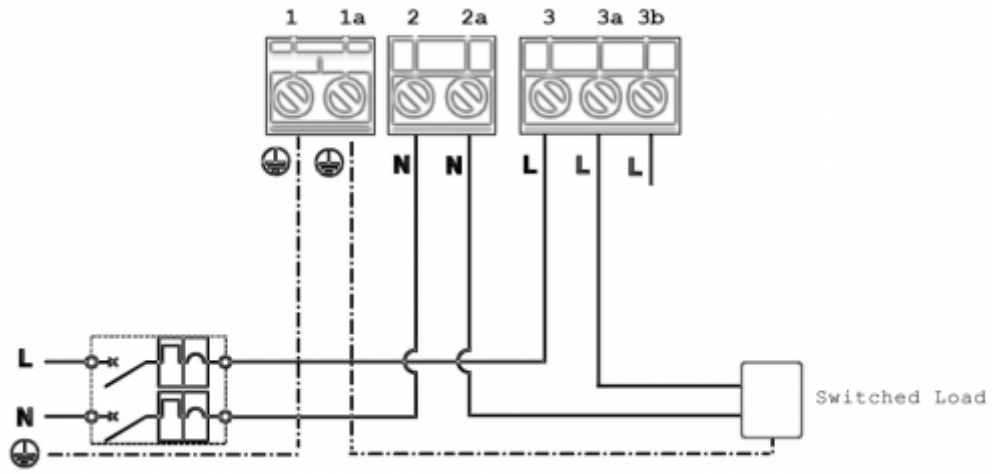

From:  
<http://wiki.hiq-home.com/> -

Permanent link:  
[http://wiki.hiq-home.com/doku.php?id=en:hiq\\_hw:rl1-wn-w&rev=1565779794](http://wiki.hiq-home.com/doku.php?id=en:hiq_hw:rl1-wn-w&rev=1565779794)

Last update: **2019/08/14 10:49**

