2025/10/21 04:24 1/7 Wireless Modbus Relay

Wireless Modbus Relay

Wireless Modbus Relay




Model number:	WR-1
Frequency:	ISM 868MHz (EU)
Dimensions:	93x45x27 mm


Applications

 Remote controlled relay. Act as modbus RTU slave. Optimal for long range, no hopping.

Installation and mounting

- Carefully open WR-1 module and configure serial communication with jumpers. (Default configuration is 9600bps, 8N1 with normal timeout)
- Place WR-1 module at least 10cm from other objects. Installation is not recommended inside metal cabinets.
- Connect RS485 terminals to WR-1 RS485 terminals
 - A A
 - ∘ B B
 - ∘ C GND
- Connect to 230V power supply
- · Configure radio pairing

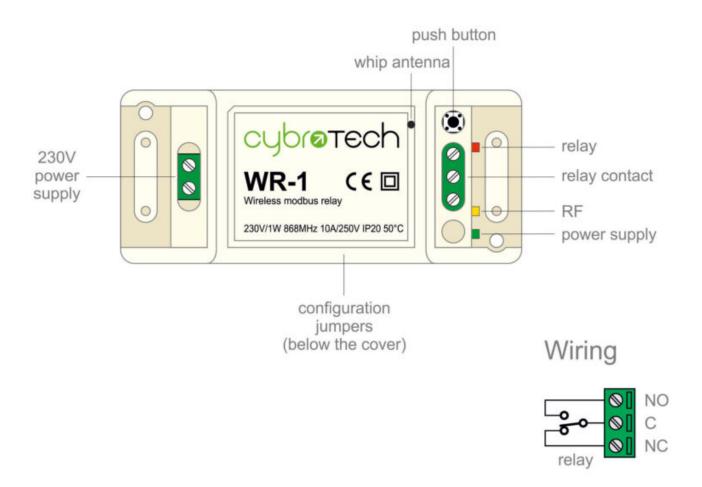

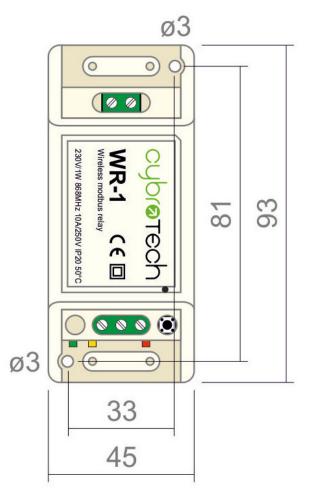

http://wiki.hiq-home.com/ Printed on 2025/10/21 04:24

Features


- remote controlled relay
- act as modbus RTU slave
- very long range, no hopping
- up to 8 relays per network
- protected private connection
- multiple addressable groups

Technical specification

Power supply:	230V, 50/60Hz, 1W	
Ingress protection:	IP20	
Operating temperature:	-2050°C	
Storage temperature:	-4085°C	
Relative humidity:	085% n/c	


Terminals and wiring

To power sensor	A B C	RS485 bus
To power supply	L N	230V AC

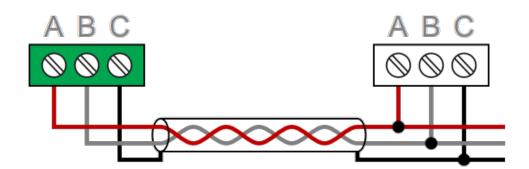

Serial configuration and timeout

- Available baudrates 2400, 9600, 19200, 38400 bps
- Data bits and parity 8N1, 7E1, 8E1, 8N2
- Max 64 bytes per transmition
- Integrated 240 Ohm termination resistor

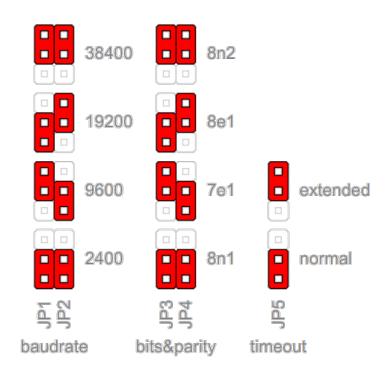

	normal	extended
2400	25ms	200ms
9600	10ms	100ms
19200	5ms	100ms
38400	5ms	100ms


Radio pairing configuration

Create new secure group

- * turn on all devices as the same time
- * within 10 seconds, while RF LED is blinking, press and hold button on one of the devices
- * after a second, the new address is randomly generated and sent to all devices. RF LED will blink 3 times to confirm the new address.


http://wiki.hig-home.com/ Printed on 2025/10/21 04:24

2025/10/21 04:24 5/7 Wireless Modbus Relay

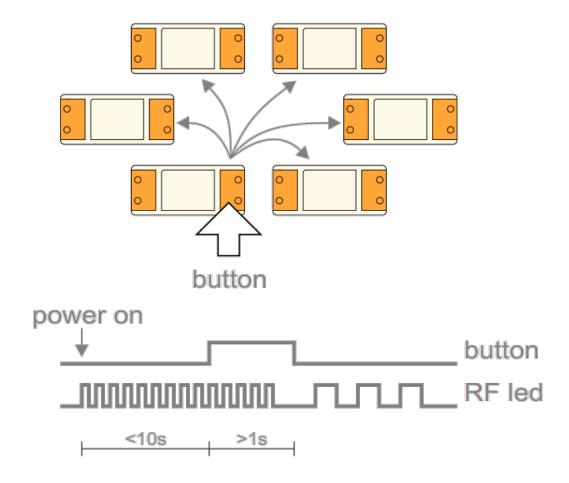

Add new device to the group

- * turn on the device
- * within 10 seconds, press and hold button on one of the existing devices
- * after a second, the existing group address is sent to the new device. RF LED will blink 3 times to confirm the address is sent.

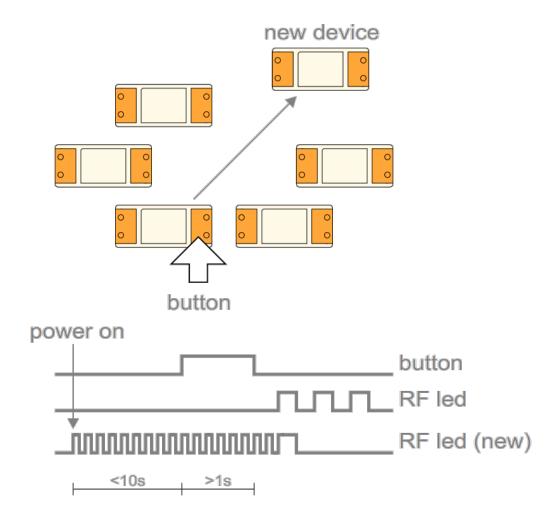

Examples

×

Connection check

• press the button shortly

With each press of the button, the relay will switch on/off. Other devices are not affected.




http://wiki.hiq-home.com/ Printed on 2025/10/21 04:24

2025/10/21 04:24 7/7 Wireless Modbus Relay

Factory reset

- Hold button and turn the device ON
- RF led will blink twice. Group address is now reset to default.
- Other devices will not be affected.

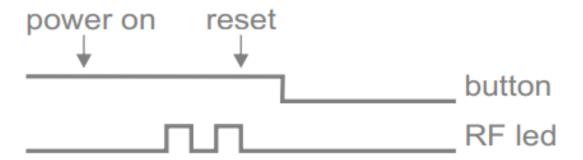

From:

http://wiki.hiq-home.com/ -

Permanent link:

http://wiki.hiq-home.com/doku.php?id=en:hiq_hw:wr-1&rev=1669732082

Last update: **2022/11/29 14:28**

