

Touch buttons

Touch buttons panels - part of complete GRMS



| | |
|------------------|-----------------------------------|
| Model selection: | Bxx-HI-Oy |
| xx: | number of buttons 1 to 12 |
| y: | color: 1 black, 2 white, 9 custom |

Example: B04-HI-02 is 4 touch buttons white


| | |
|----------------------------|-------------------|
| Mounting: | on-wall, UK style |
| Dimensions 1 to 6 buttons: | 86×86×(10)42mm |

| | |
|------------------------------|-----------------|
| Dimensions 8 buttons: | 105×86×(10)42mm |
| Dimensions 10 to 12 buttons: | 120×86×(10)42mm |

Technical specification

| | |
|------------------------|---|
| Power: | 24 VDC |
| Network: | RS485 Modbus protocol |
| Material: | Tempered glass |
| Touch: | High sensitivity capacitive touchscreen |
| Service lifespan: | 1,000,000 touch times |
| Operating temperature: | 0..45°C |
| Storage temperature: | -10 to 60°C |
| Relative humidity: | 10-95% RH n/c |

Terminals

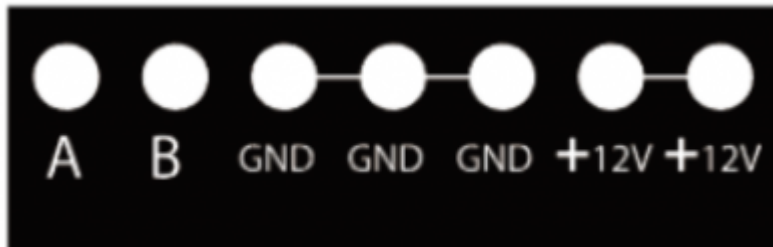

From:
<http://wiki.hiq-home.com/> -

Permanent link:
http://wiki.hiq-home.com/doku.php?id=en:ms_main:bxx-hi-0y&rev=1589132805

Last update: **2020/05/10 17:46**

