



POE Switch 4 port

5-Port 10/100 Mbps Desktop Switch with 4-Port PoE

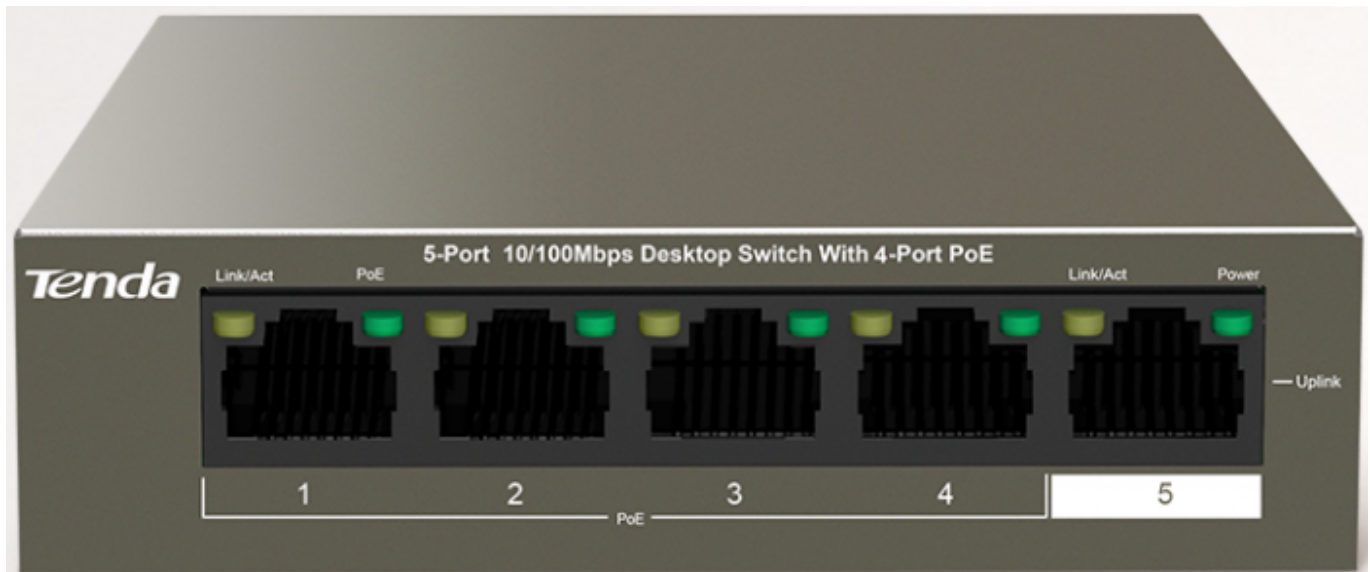

Hardware Features		
Standards&Protocols	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at	
Switching capacity	1Gbps	
Throughput	0.74Mpps	
Dimensions (W × D × H)	100mm*100mm*26mm	
Lightning protection	6KV	
Indicators	Link/Act, PoE Status, Power	
Interfaces	4 10/100Mbps RJ45 Ports(Data/PoE) 1 10/100Mbps RJ45 Ports(Data) (Auto Negotiation/Auto MDI/MDIX)	
Capacity	Wire-speed forwarding	Support
	Forwarding mode	Store-forward and cut-through
	Mac Address Table	1K
PoE Supply	Port 1 to Port 4 support standard IEEE802.3at/af power(maximum power for each port is 30W), PoE power type is end-span(12+, 36- and 45+, 78- line pair)	
Input Voltage	AC: 100-240V~50/60Hz DC: 51V /1.25A (Power Adapter Output)	
Power consumption	in full configuration: <63.7W Power Supply: 57.8W	
Environment	Operating Temperature: 0°C~40°C(32°F~104°F) Storage Temperature: -40°C~70°C(-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing	
One-key mode	Standard: the switch functions as a common unmanaged switch and all the ports of the switch can communicate with each other. Extend Mode: If the extend mode is enabled, the transmission distance of both power and data will extend up to 250m(10Mbps), this funcation can replace the extender and parts of the Fiber. It will extend the distance of the whole system and save the cost of the project.	
Certification	FCC, CE, RoHS	



From:

<https://wiki.hiq-universe.com/> -

Permanent link:

https://wiki.hiq-universe.com/doku.php?id=en:ms_main:poe_switch_4_port

Last update: **2022/05/18 15:09**

