

Power supply

24 V DC / 2.5 A power supply



| | |
|---------------|-----------------|
| Model number: | PS-60-24 |
| Mounting: | DIN rail |
| Dimensions: | 93 x 78 x 56 mm |


Highlights & Features


- Universal AC input voltage and full power up to 50°C
- Efficiency > 84.0% @ 230Vac

Technical specification

| | |
|-----------------------|--|
| Input voltage range | 90 - 264 VAC |
| Output voltage | 24 VDC |
| Output current | 2.50 A |
| Input current | 0.65A @ 230Vac |
| Efficiency | 84% |
| Operating temperature | -20°C to +50°C; 20% to 90% RH |
| Storage temperature | -40°C to +85°C; 10% to 95% RH Non condensing |

Dimensions

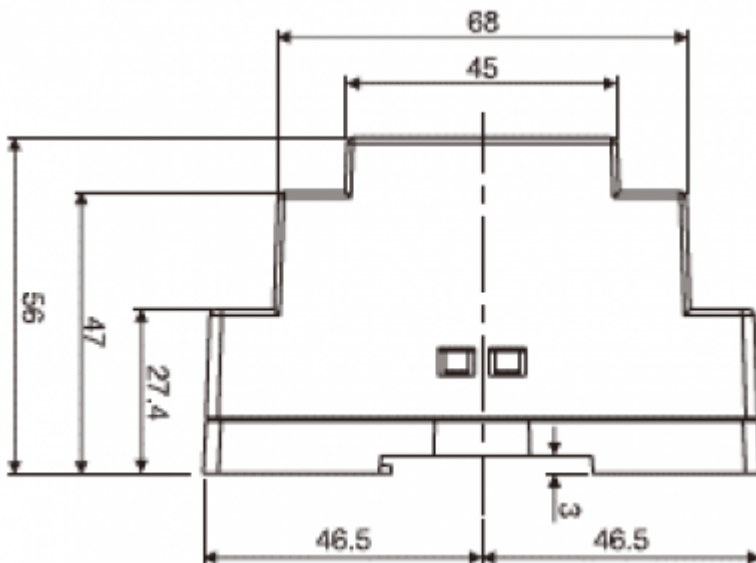

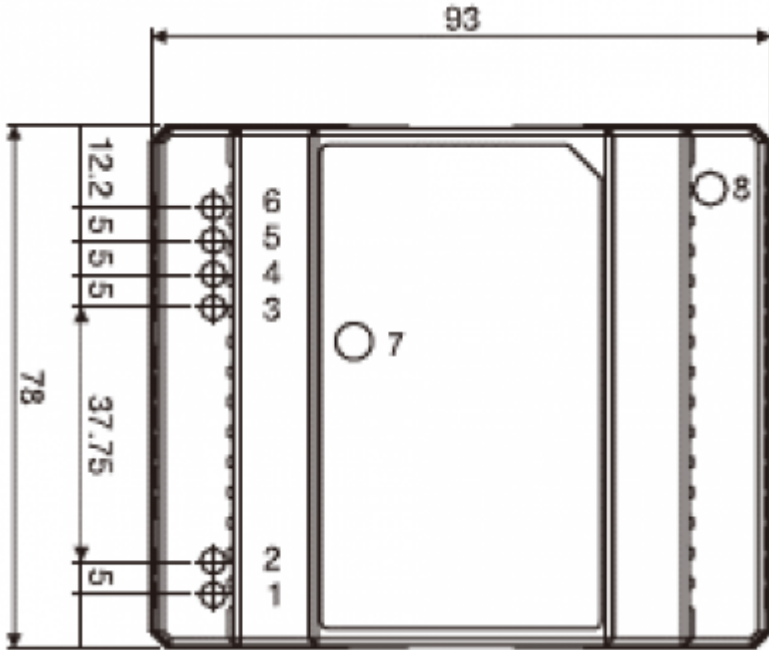

Pin assignment

| Pin NO. | Assignment | Pin NO. | Assignment |
|---------|------------|---------|------------|
| 1 | AC/L | 5,6 | +V |
| 2 | AC/N | 7 | LED |
| 3,4 | -V | 8 | +V ADJ. |

From:

<http://wiki.hiq-home.com/> -

Permanent link:

http://wiki.hiq-home.com/doku.php?id=en:ms_main:ps-60-24&rev=1610363987

Last update: **2021/01/11 11:19**

