

Power supply

24 V DC / 2.5 A power supply



| | |
|---------------|-----------------|
| Model number: | PS-60-24 |
| Mounting: | DIN rail |
| Dimensions: | 93 x 78 x 56 mm |

Highlights & Features


- Universal AC input voltage and full power up to 50°C
- Efficiency > 84.0% @ 230Vac

Technical specification

| | |
|-----------------------|--|
| Input voltage range | 90 - 264 VAC |
| Output voltage | 24 VDC |
| Output current | 2.50 A |
| Rated Current | 60W |
| Voltage adj. range | +/-10% |
| Voltage tolerance | +/-1% |
| Input current | 0.65A @ 230Vac |
| Operating temperature | -20°C to +50°C; 20% to 90% RH |
| Storage temperature | -40°C to +85°C; 10% to 95% RH Non condensing |

//

Dimensions

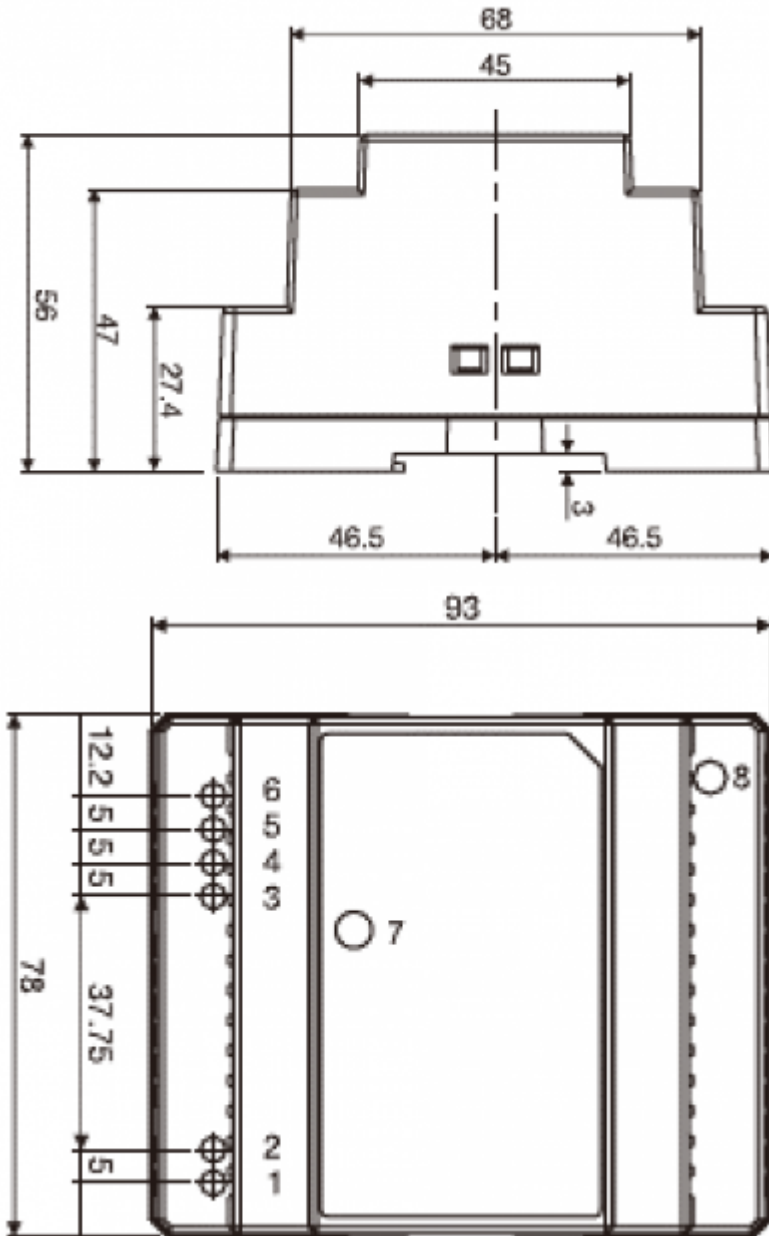

Pin assignment

| Pin No. | Assignment | Pin No. | Assignment |
|---------|------------|---------|------------|
| 1 | AC/N | 5, 6 | -V |
| 2 | AC/L | 7 | LED |
| 3, 4 | +V | 8 | +V Adj. |

Safety Standards

- UL60950-1
- TUV EN60950-1
- EN50178

From:
<http://wiki.hiq-home.com/> -

Permanent link:
http://wiki.hiq-home.com/doku.php?id=en:ms_main:ps-60-24&rev=1610922095

Last update: **2021/01/17 22:21**

