2025/11/03 17:07 1/8 Typical installations

Typical installations

Small shop, pharmacy

Requirements

- · limited number of visitors
- one passage for access and exit
- · automatic door
- required temperature measurement
- required disinfection

Installation

- SGate is installed at the entrance from the outside of the automatic door.
- Entry detection sensors are mounted on one of the sides or on an additional carrier depending on the physical layout of the SGate relative to the door..
- The automatic door opening signal is connected to the SGate and in parallel to the internal automatic opening sensor.
- The staff has a wireless button to confirm alarms or to open the door manually in case of exceptions.



Settings



Department store

Requirements

- · limited number of visitors
- one-way entrance with swing gate
- separate exit
- required temperature measurement
- required disinfection
- staff can access it by scanning the code even when the count limit 1 is exceeded
- staff do not need to scan the temperature 4 hours after a successful scan
- · hand disinfection is not mandatory for employees

Installation

- SGate is installed at the entrance from the outside of the swing gate.
- Entry detection sensor is mounted on side of SGate or on an additional carrier depending on the physical layout of the SGate relative to the gate.
- Security guard has a wireless button to confirm alarms or to open the door manually in case of exceptions.



Settings



Staff code

http://wiki.hig-home.com/ Printed on 2025/11/03 17:07

2025/11/03 17:07 3/8 Typical installations



Offices

Requirements


- · number of visitors not limited
- one passage for access and exit
- automatic door
- required temperature measurement
- employees do not need to scan the temperature 4 hours after a successful scan
- required disinfection
- required authentication with code for employees and guests
- guests are exceptionally allowed to enter with confirmation of the reception (without code)

Installation

- SGate is installed at the entrance from the outside of the automatic door.
- Entry detection sensor is mounted on side of SGate or on an additional carrier depending on the physical layout of the SGate relative to the door.
- Receptionist has a wireless button or PC application to confirm alarms or to open the door manually in case of exceptions.
- Upon booking a meeting, each guest receives a QR code, which is time limited.




Settings

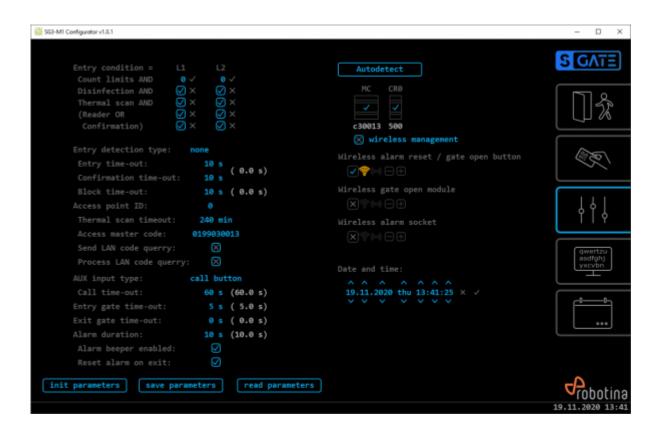

Employee code

http://wiki.hig-home.com/ Printed on 2025/11/03 17:07

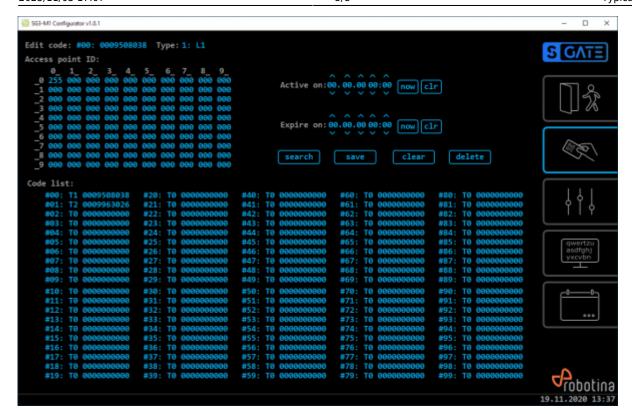

Guest code




Health Center

Requirements

- visitors can enter only at a specified time
- one passage for access and exit
- · automatic door
- required temperature measurement
- · required disinfection

Installation


- SGate is installed at the entrance from the outside of the automatic door.
- Entry detection sensors are mounted on side of SGate or on an additional carrier depending on the physical layout of the SGate relative to the door.
- Receptionist has a wireless button to confirm alarms or to open the door manually in case of exceptions.
- Upon booking, each visitor receives a QR code, which is time limited.

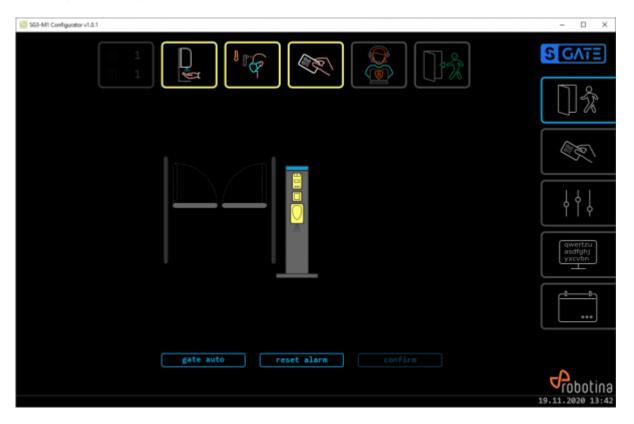

Settings

http://wiki.hig-home.com/ Printed on 2025/11/03 17:07

2025/11/03 17:07 7/8 Typical installations

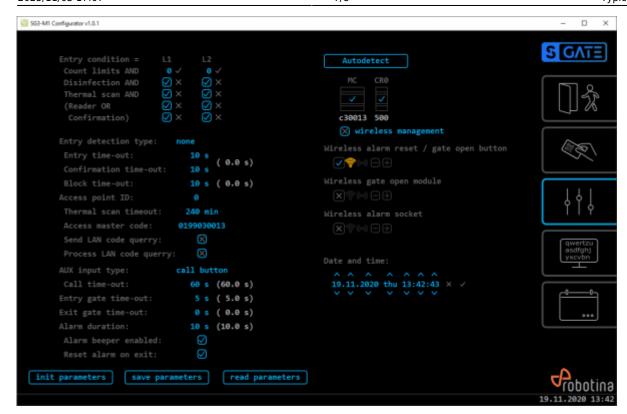

Guest code



Last update: 2020/11/27 11:02

From:

http://wiki.hiq-home.com/ -

Permanent link:

http://wiki.hiq-home.com/doku.php?id=en:sg3:installations&rev=1606474948

Last update: 2020/11/27 11:02

http://wiki.hiq-home.com/ Printed on 2025/11/03 17:07