RDX Charger (Robotina Dynamic Charger)



Description	Order Code
RDX Charger with type 2 cable and RFID card reader	**RDX-RF**
RDX Charger with type 2 cable, RFID reader and RCD AC	**RDX-RF-R**
RDX Charger with type 2 cable, RFID reader and IOT Linker	**RDX-RF-I**
RDX Charger with type 2 cable, RFID reader, RCD AC and IOT linker	**RDX-RF-RI**
RDX Charger with type 2 cable and QR code reader	**RDX-QR**
RDX Charger with type 2 cable, QR code reader and RCD AC	**RDX-QR-R**
RDX Charger with type 2 cable, QR code reader and IOT Linker	**RDX-QR-I**
RDX Charger with type 2 cable, QR code reader, RCD AC and IOT linker	**RDX-QR-RI**

Features


- **Up to 22kW of charging power**
- **Modern design with IP54 & IK10 standard**
- **Suitable for indoor and outdoor use**
- **Coloured LED light indicates charging status**
- **Easy operability with one button on housing**
- **Monitor & control on application**
- **Compatible with 3rd party software**
- **Secure charger with remote locking option**
- **Save by charging (economy charging) during off-peak hours**
- **Charge with surplus energy**

- **Priority charging at the highest possible power**
- **Dynamic load balancing keeps consumption power below max allowed (protect grid fuse/s)**
- **Manage charging of electric vehicles (EV fleet)**
- **Remote control of key consumers (heat pump, battery storage system…)**
- **6mA DC residual current, overvoltage and undervoltage protection**
- **30mA AC residual current ** * **RFID or QR access control**
- **Long range wireless power meters for installation without cabling**
- **Fully compliant with IEC 61851**

Technical specifications


Nominal voltage	1x230Vac 50/60Hz, 3×230/400Vac 50/60Hz
Maximum current	1x32A, 3x32A
Maximum charging power	22kW
Connector	Type2, 5m cable
Network connection	Ethernet 100M RJ45
	4G LTE (option)
Ingress protection	IP54
Impact resistance	IK10
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to + 70°C
RCD (residual-current device)	DC, 6mA
	AC, 30mA (option)
Standards	IEC 61851

Dimensions

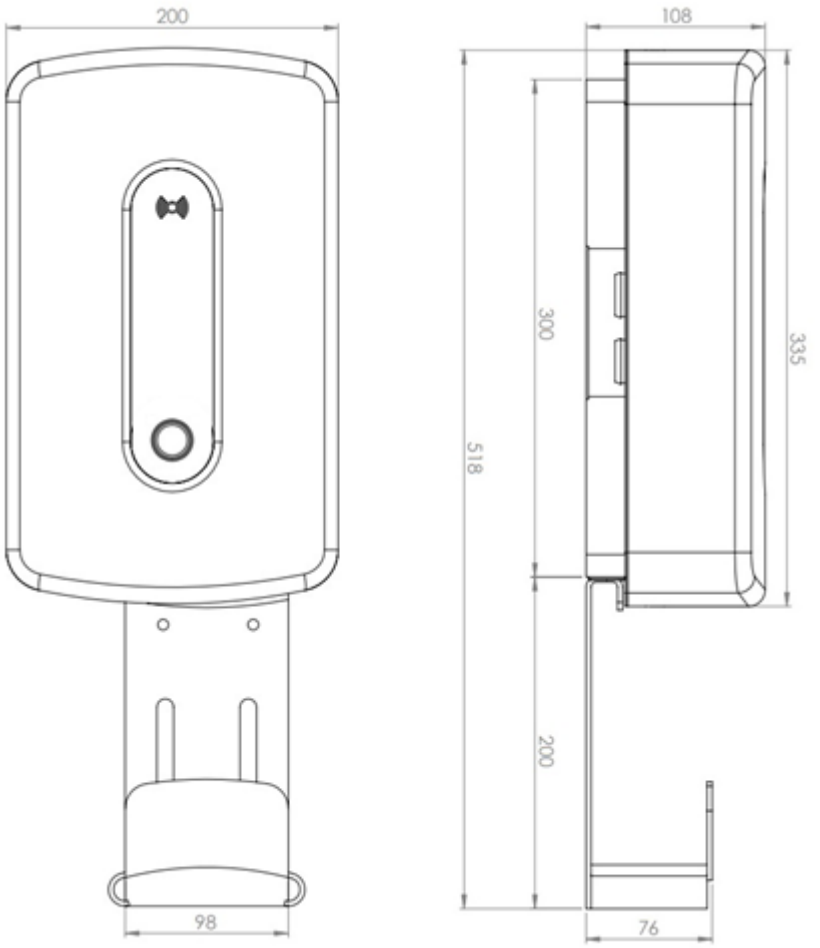


Cable holder mounting options

It can be installed directly on the RDX Charger

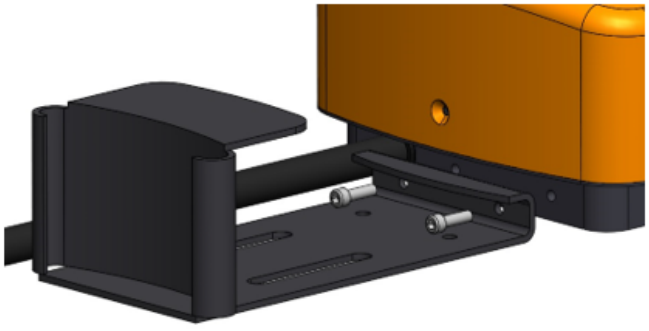

It can be installed independently on the wall

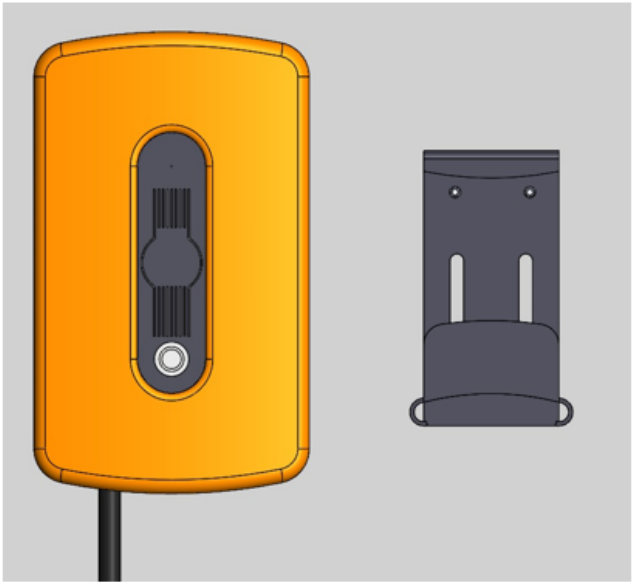

Accessories

Description	Order Code
Wireless external single-phase Power sensor kit	**WPM1-E-D**
Wireless external three-phase Power sensor kit	**WPM3-E-D**
External single-phase Power sensor	**PM1-E-D**
External three-phase Power sensor	**PM3-E-D**
Wireless Modbus bridge	**WM-1**
Wireless relay, to control other loads in the building	**WR-1**
Protective roof	**RDX-PR**
Freestanding set	**RDX-FS**
4G LTE modem for IOT linker **This option is only possible for RDX Charger models that already have an integrated IOT linker**	**IOT-L2-W**

From:
https://wiki.hiq-home.com/ -

Permanent link:
https://wiki.hiq-home.com/doku.php?id=en:hiq_hw:rdx_charger&rev=1674572483

Last update: **2023/01/24 15:01**